




1.1 Rated current (额定电流): 5.0 A For Vbus pin
1.25A For Vconn pin
0.25A For Other pin

1.9 Operating temperature (工作温度): $-40^{\circ}\sim+85^{\circ}$

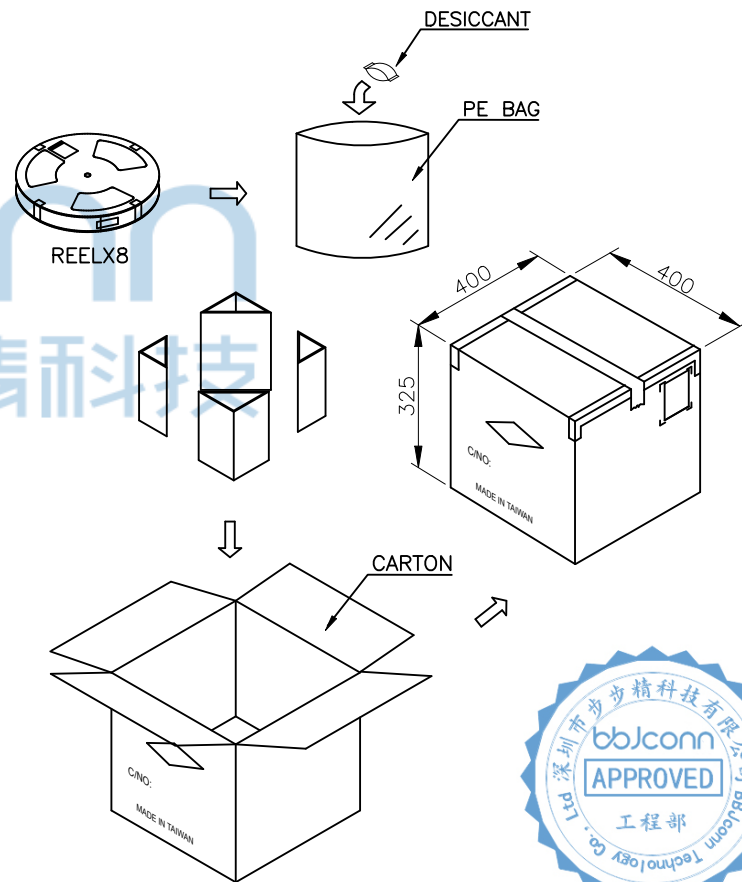

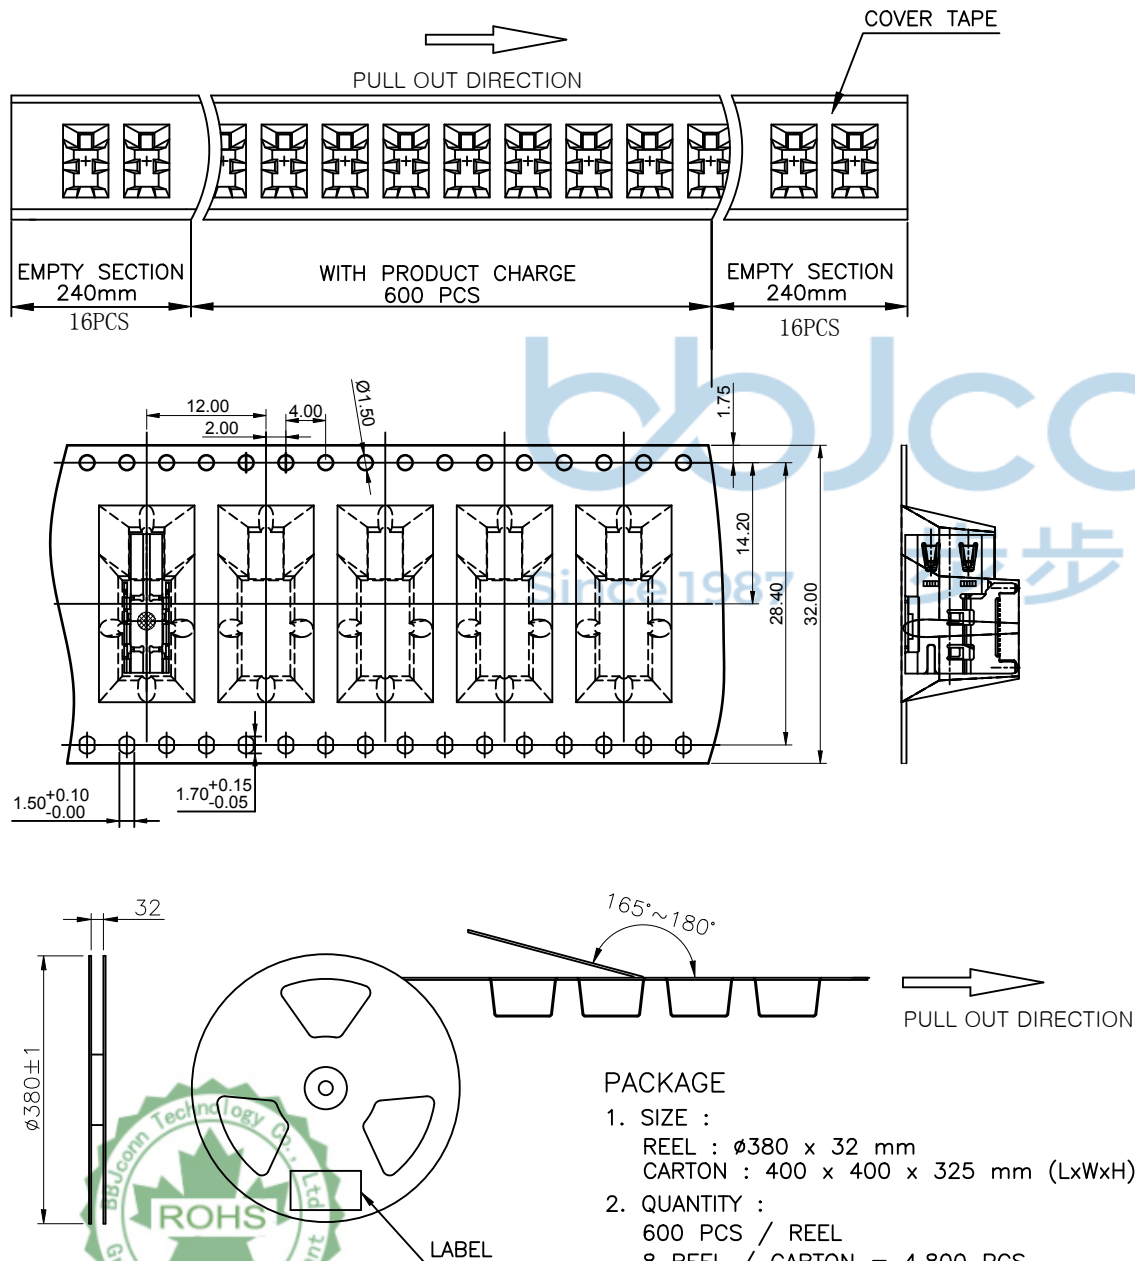

PACKAGE

1. SIZE :
REEL : $\varnothing 380 \times 32$ mm
CARTON : $400 \times 400 \times 325$ mm (LxWxH)

2. QUANTITY :
600 PCS / REEL
8 REEL / CARTON = 4,800 PCS

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	
APPD. JM_Zheng		NAME: U4 20G速率 YPE-C 24P 母座 侧插 双壳 四脚插 带柱 端子SMT L=14.30 CH=5.06 脚长1.70 脚距宽4.2	
CHKD. Yan		PJ. NO.: 126-227-240002-U4G	
DR. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0470-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	