
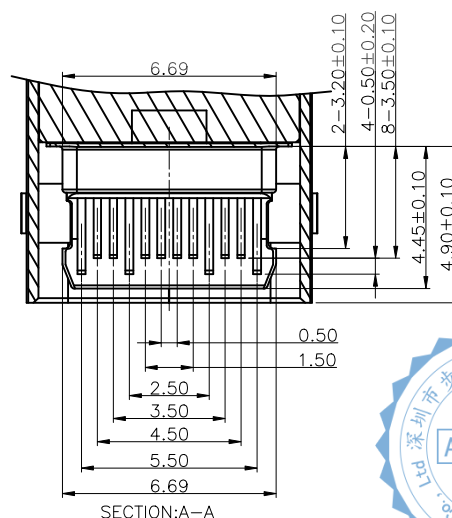

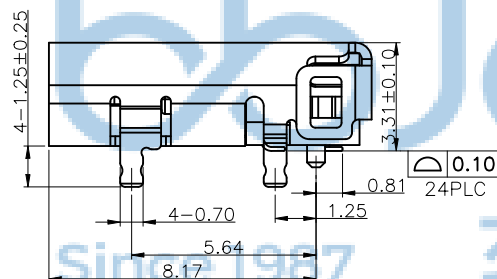
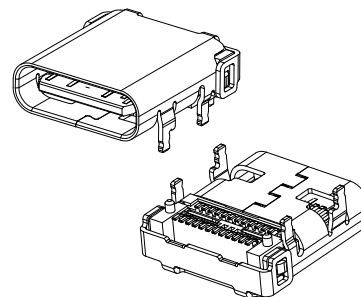
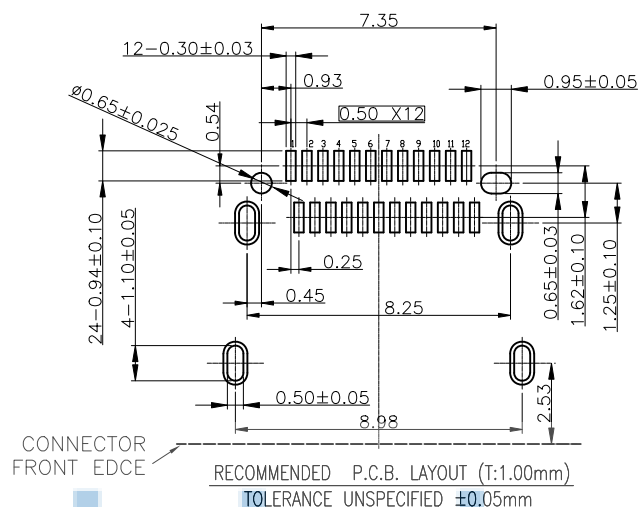
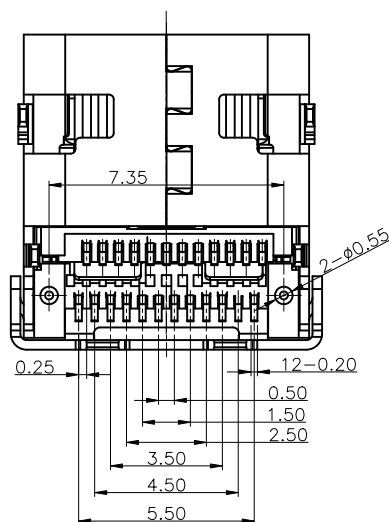
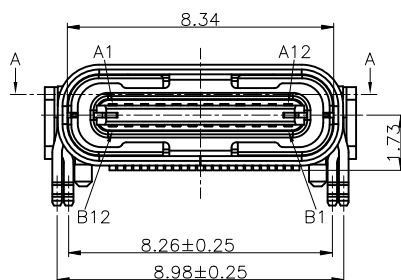


Б

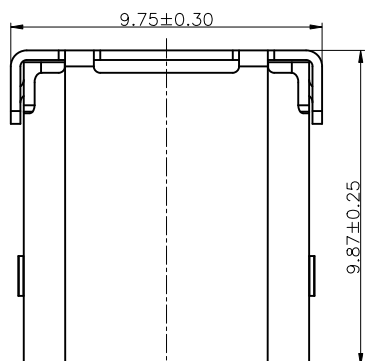

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5A MAX
VOLTAGE RATING: 20V
2. Dielectric Withstanding Voltage: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSRxp	Positive half of first SuperSpeed TX differential pair	B11	SSRxp	Positive half of first SuperSpeed RX differential pair
A3	SSXTxn1	Negative half of first SuperSpeed TX differential pair	B10	SSRxn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRxn2	Negative half of second SuperSpeed RX differential pair	B3	SSXTn2	Negative half of second SuperSpeed TX differential pair
A11	SSRxp2	Positive half of second SuperSpeed RX differential pair	B2	SSRxp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

		USB4 Gen3 USB TYPE C 24pin 母座	LCP 蓝色 端子镀半金锡1u"	
		USB4 Gen3 USB TYPE C 24pin 母座	PA9T 黑色 端子镀半金锡30u"	
UC. 01. 52-1L-0003		USB4 Gen3 USB TYPE C 24pin 母座	PA9T 黑色 端子镀半金锡1u"	
6	接地片	SUS316L T=0.12mm	No Plated	1PCS
5	中夹片	SUS301R-H T=0.15mm	No Plated	1PCS
4	SHELL	SUS304R-1/2H T=0.30mm	NI 50u" Plated	1PCS
3	CONTACT	C18400 T=0.12mm	Au, Sn SEE TABLE NI50u" Plated	1SET
2	CONTACT	C18400 T=0.12mm	Au, Sn SEE TABLE NI50u" Plated	1SET
1	HOUSING	PA9T	BLACK/BLUE	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME: U4 40G速率 TYPE-C 24P 母座 L=9.87
CH=1.73 错位双贴SMT 板上四脚插 带柱 外壳无弹

APPD.	JM_Zheng
-------	----------

	PJ. NO.: UC.01.52-1L-0003
---	---------------------------

CHKD.	TSP
-------	-----

SIZE: A4	DRW NO.:
THICKNESS: SEE NOTES	DATE: SEE NOTES

DR.	LYX
-----	-----

SCALE: N/A	REV: A3	UNIT: mm	PAGE: 1/2
------------	---------	----------	-----------

[

F



1

1



1

[illegible]


--	--

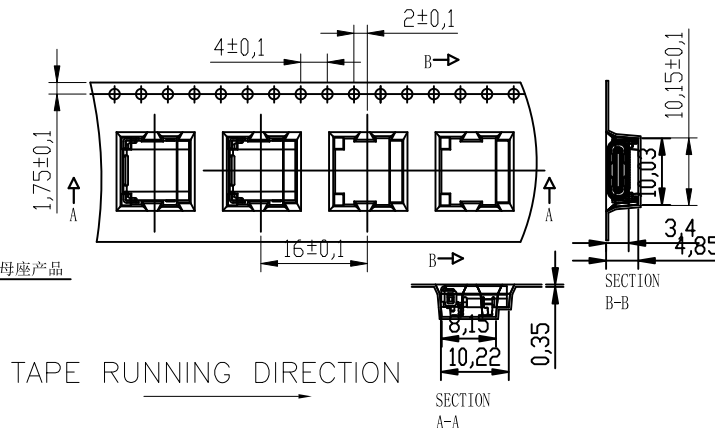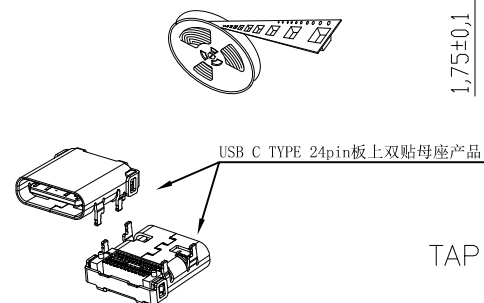

第一步: 产品摆入载带中(应注意产品摆放方向和载带拉出方向要正确)

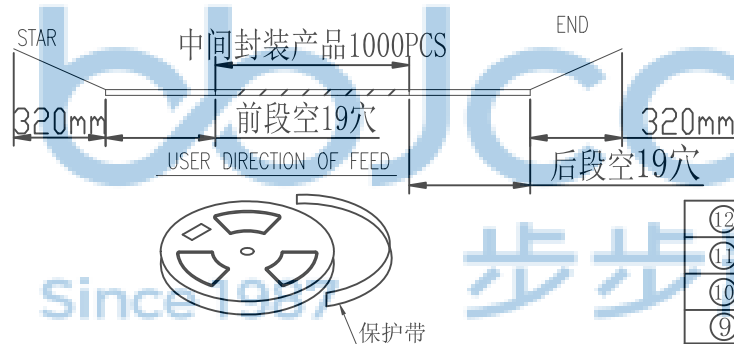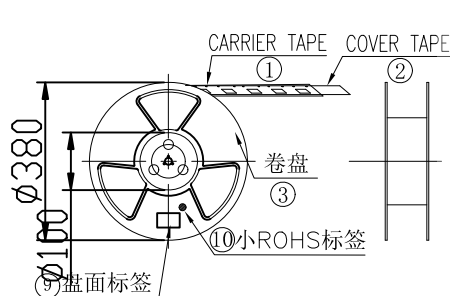

第三步: 装外箱贴标签(应注意封口整齐, 标签位置正确)

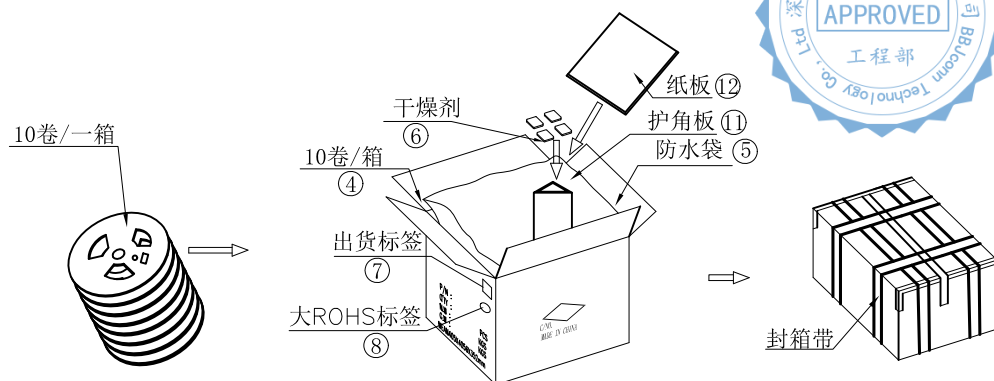

⑫	纸板	2	PCS	L332*W332mm T=3mm
⑪	护角板	4	PCS	L330*H270mm T=5mm
⑩	小ROHS标签	10	PCS	Ø15.7
⑨	盘面标签	10	PCS	
⑧	大ROHS标签	1	PCS	Ø40.0
⑦	出货标签	1	PCS	
⑥	干燥剂	5	BAG	
⑤	防水袋	1	PCS	
④	外纸箱	1	PCS	L405*405*352 K=K 内径
③	卷盘	10	SET	Ø380*100mm, W=24mm
②	COVER TAPE	1000	PCS	W=21.3mm, 13.2m/REEL
①	CARRIER TAPE	10	PCS	W=24mm, T=0.35mm, L=16.6m/REEL
序号	包材名称	PCS/盘	盘/箱	单位
		包装总数量		备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0400-1		DR. LYX	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'		NAME: U4 40G速率 TYPE-C 24P 母座 L=9.87 CH=1.73 错位双贴SMT 板上四脚插 带柱 外壳无弹	
APPD. JM_Zheng		CHKD. TSP		PJ. NO.: UC.01.52-1L-0003	
FINISH: SEE NOTES		MAT'L.: SEE NOTES		SCALE: N/A	
REV.: A3		UNIT: mm		PAGE: 2/2	