

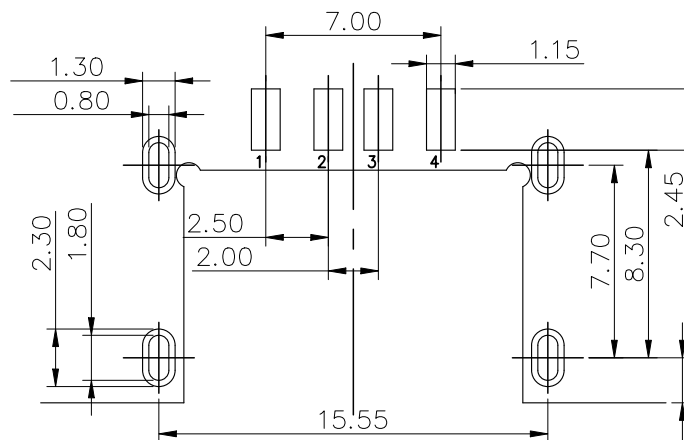


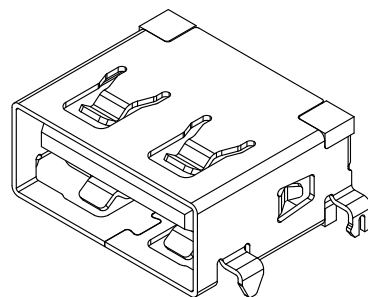

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW (TOLERANCE: ± 0.05)

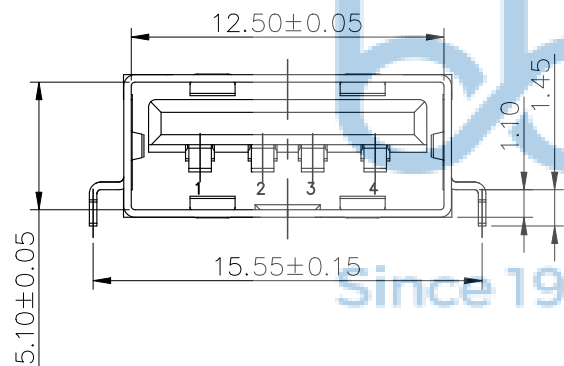

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

NOTES:

1. MATERIAL

CONTACTS: COPPER ALLOY C2680 (T=0.20mm)

SHELL: SPCC (T=0.30mm)

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, LCP UL94 V-0.

2. ELECTRICAL PERFORMANCE,

CONTACT RESISTANCE: 30MΩ MAX

CONTACT CURRENT RATING: 1.5 AMPERES

DIELECTRIC WITHSTAND VOLTAGE, 500V R.M.S

INSULATION RESISTANCE: 100MΩ MIN

OPERATING TEMPERATURE: -40° C~+85° C.

3. MECHANICAL PERFORMANCE,

INSERTION FORCE: 3.5kgf Max

REMOVAL FORCE: 1.02kgf Min

DURABILITY: 5000 CYCLES.

4. PLATING SPECIFICATION:

CONTACTS: GOLD PLATED ON CONTACT AREA, Sn ON SOLDER AREA, NICKEL UNDERPLATED.

SHELL: BRIGHT NICKEL PLATING OVER ALL, NICKEL MUST BE SOLDABILITY.

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0 .




Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程 部		NAME: USB 2.0 AF 90度 短体L=11.05 沉板1.1 端子SMT 平口 LCP黑胶 铁壳	
PX: ± 0.38	XX: ± 0.25	XXX: ± 0.13	X': $\pm 3'$	X'': $\pm 2'$	XX': $\pm 1'$
APPD.	JM_Zheng	PJ. NO.: UB.01.32-11-1002		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO: 0100-2				PAGE: 1/2	

一. 將成品依同一方向放入真空盤內,如圖所示。

At same direction, put product onto the tray. Direction refers to below drawing.

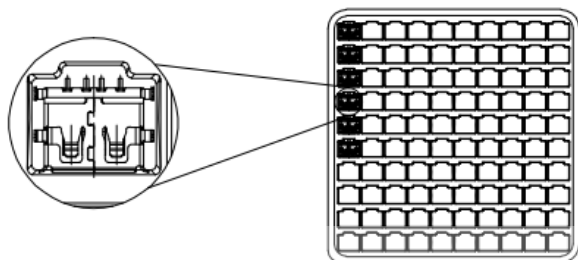

VIEW-1

- 二. 一只紙箱可放置之包裝盤(包括上蓋)見下表.
- 1) trays per carton, please see next table.
 - 2) 最上面一個真空盤作為上蓋,故不放置成品.貼上標籤.
2) Put cover on the top tray to protect product. Sticking Show.
 - 3). 每1個紙箱用的包裝數量詳見下表.
3) The Qty of products per carton please see next tabel.

10 盤一捆




真空盤
Tray

15 盤一捆



Cushion

VIEW-2



紙箱



標籤黏貼處
Location of
Sticking lable


4) 將裝滿成品的真空盤用 PE帶捆緊後放在塑膠袋內,裝完後再封箱。

4) Bind the trays with PE tape and then put them into the poly bag. Seal the carton with tape.

三.

1). 將標籤貼於紙箱側上方。

Stick the needful label On the up-right corner of the side of carton.

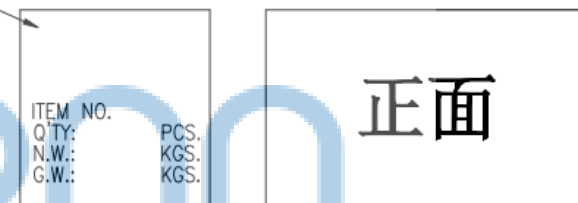

VIEW-3

備 註(REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿

The unfilling-carton must be filled with assuagement.

2. 裝滿成品后之外箱,最大堆積箱數:5箱

About the box fully filled with products, the MAX accumulating quantity of boxes is 5.

3. 如須貼Bar-code,請依Bar-code作業辦法執行

If barcode lable is required, do it according to the related barcode lable operation standards.



包裝明細表 (The detail of the packing)

	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
	100	50	5000			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0100-2

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: USB 2.0 AF 90度 短体L=11.05 沉板1.1 端子SMT 平口 LCP黑胶 铁壳
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: UB.01.32-11-1002
		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2