

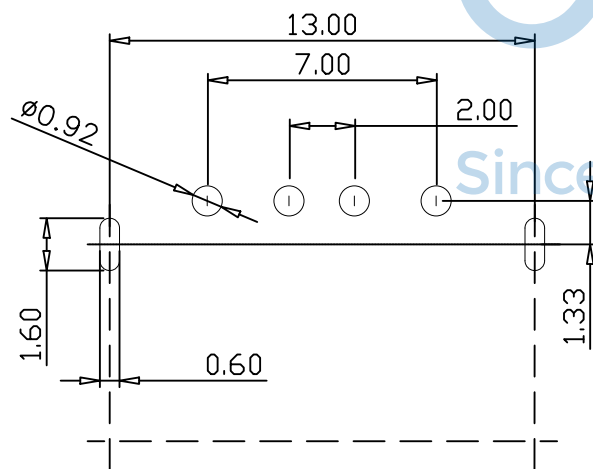
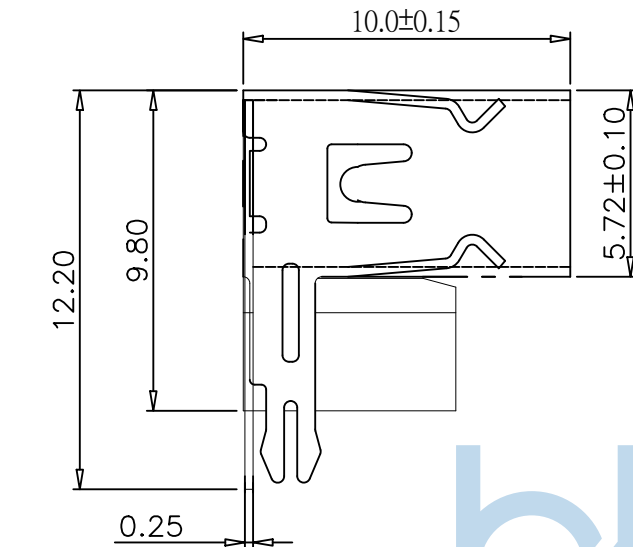


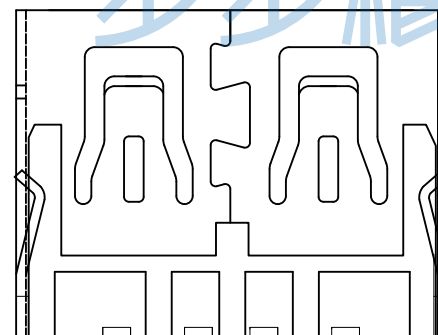

RECOMMENDED P. C. B LAYOUT

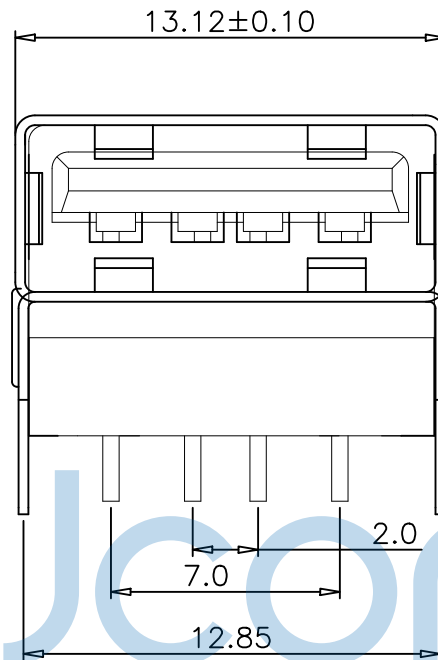

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnc Withstanding Voitage:
500 V AC AT Sea Levcl
5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:




1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子整个表面: 镀镍40u"min., 端子锡脚: 镀锡100-200U"
端子接触区域: 镀金1U"

2. 外壳:Shell:
铜壳四周镀镍80U" (MIN)
Nickel Plating



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: USB 2.0 A母 90度 DIP LCP黑胶 平口 铜壳 后两脚插 直脚 垫高款 L=10.0 H=9.80 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		APPD. JM_Zheng	
PDWG,NO: 0383-1		CHKD. LYX		P.J. NO.: 127-272-040005-W7G	
DR. TSP		FINISH: SEE NOTES		SIZE: A4 DRW NO.:	
		SCALE:N/A		MAT'L.: SEE NOTES	
		REV.: A0		UNIT: mm	
				PAGE: 1/2	

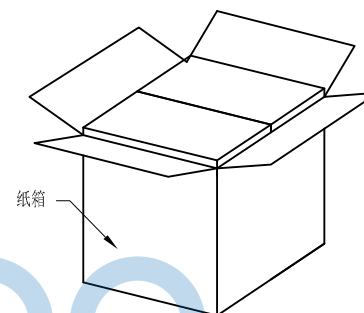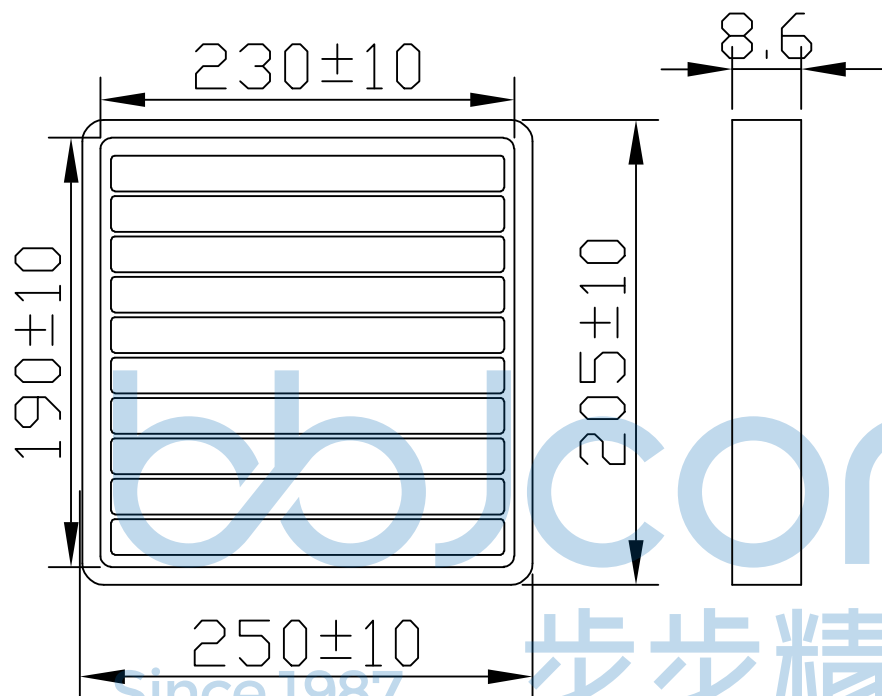

纸箱规格: 350*210*290



1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: USB 2.0 A母 90度 DIP LCP黑胶 平口 铜壳 后两脚插 直脚 垫高款 L=10.0 H=9.80 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 127-272-040005-W7G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	