
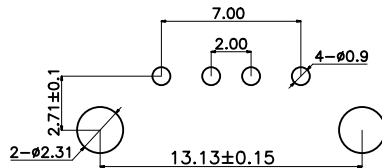
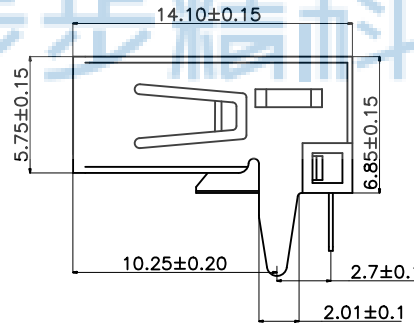
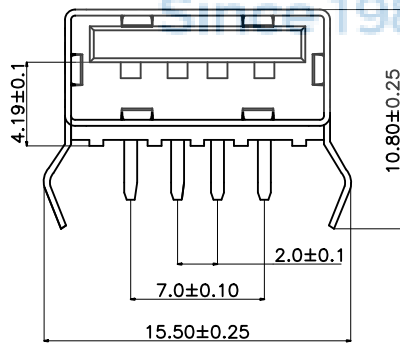





REV.	ECN	NO	CONTENT	DATE	ENGINEER
AO			Initial release	/	SGF

特性:Specifications;
电器:Electyical:
接触阻抗:Contact Resistance
30 millionms MAX
耐电压:Dielectyic Withstanding Voltage:
500v AC AT Sea Level
绝缘阻抗:Insulation Resistance:
1000 MEGA ohms MLN
机构:Machanical:
接合为:Mating Force;
3.75 KG MAX 最大3.75Kg
拔出力:Unmating Force;
1.02KG MIN.最少1.02KG
材料:Matorial:
塑胶:Housing:High Temperatuye Thermoplastics
UL 94V-0 耐高温塑胶
端子:Contact:Copper Alloy 铜合金
铁壳:Shell:Copper Alloy铜合金
电镀:Finish:
端子:Contact:Plated Gold in Mating Area;
Tin/On Solder Tails
接触点镀金;脚镀锡
铁壳:Shell:
nickel Plating 镀镍

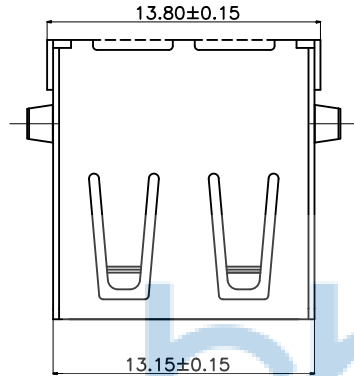

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG:NO: 0383-1

深圳市步步精科技有限公司		NAME: USB 2.0 A母 90度 L=14.1 两脚弯插 端子DIP 平口 PBT白胶 铁壳 外扣 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	PJ. NO.: 127-272-040036-W7G	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. SGF		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: AO UNIT: mm PAGE: 1/2

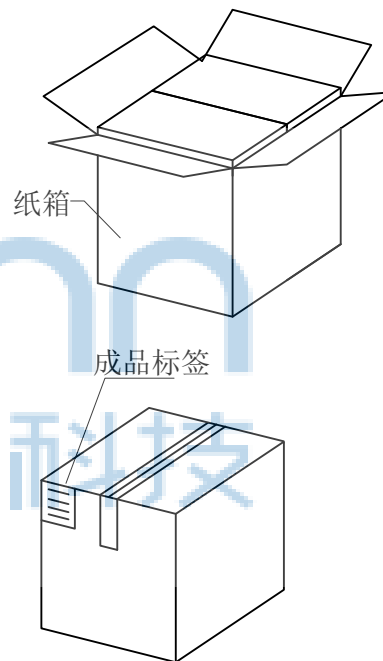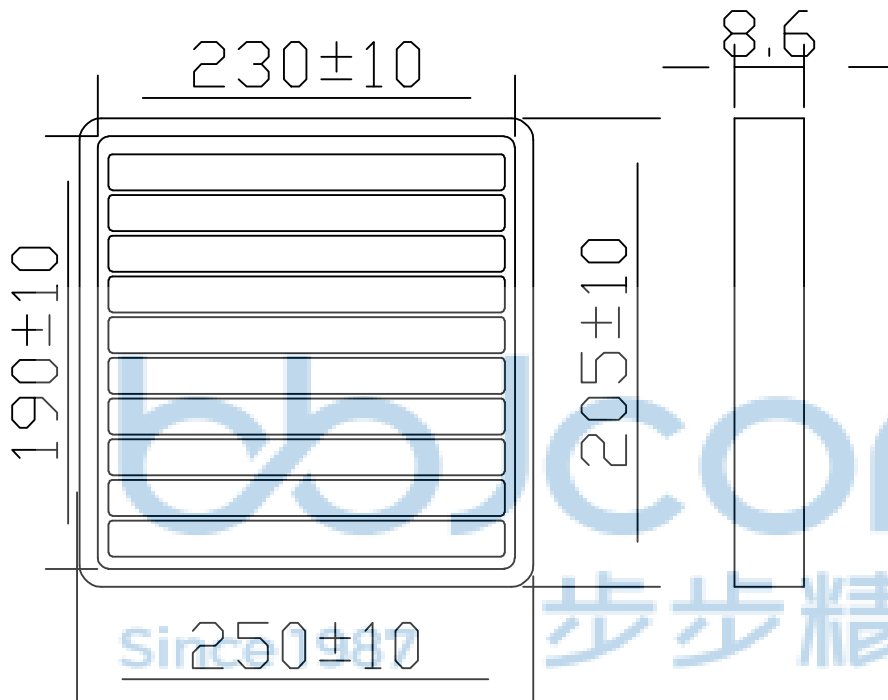

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每50盘放一箱, 共计5000PCS;
- 1.3 纸箱外贴上标签。



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0383-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .X': ±1"

NAME: USB 2.0 A母 90度 L=14.1 两脚弯插
端子DIP 平口 PBT白胶 铁壳 外扣 盒装

APPD. JM_Zheng

PJ. NO.: 127-272-040036-W7G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2