
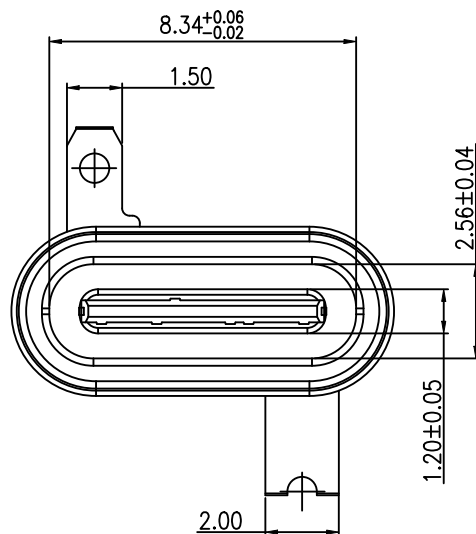


NOTES:

- 电气特性:
耐压: 100V AC/60S/0.5mA
绝缘阻抗: 100M Ω /MIN, 500V DC/MIN
接触阻抗: 40m Ω /MAX (VBUS/GND) 测试后变化10m Ω ;
额定电流: 2A 温度: 30° /MAX
- 机械物性:
插入力: 5~20N
拔出力: 8~20N, 测试后拔出力6~20N;
耐久次数: 10000次
- 标示: ▼ 为重点尺寸, ▼ 为巡检尺寸。
- 产品物料及制程符合“GP”文件对环境管理标准。

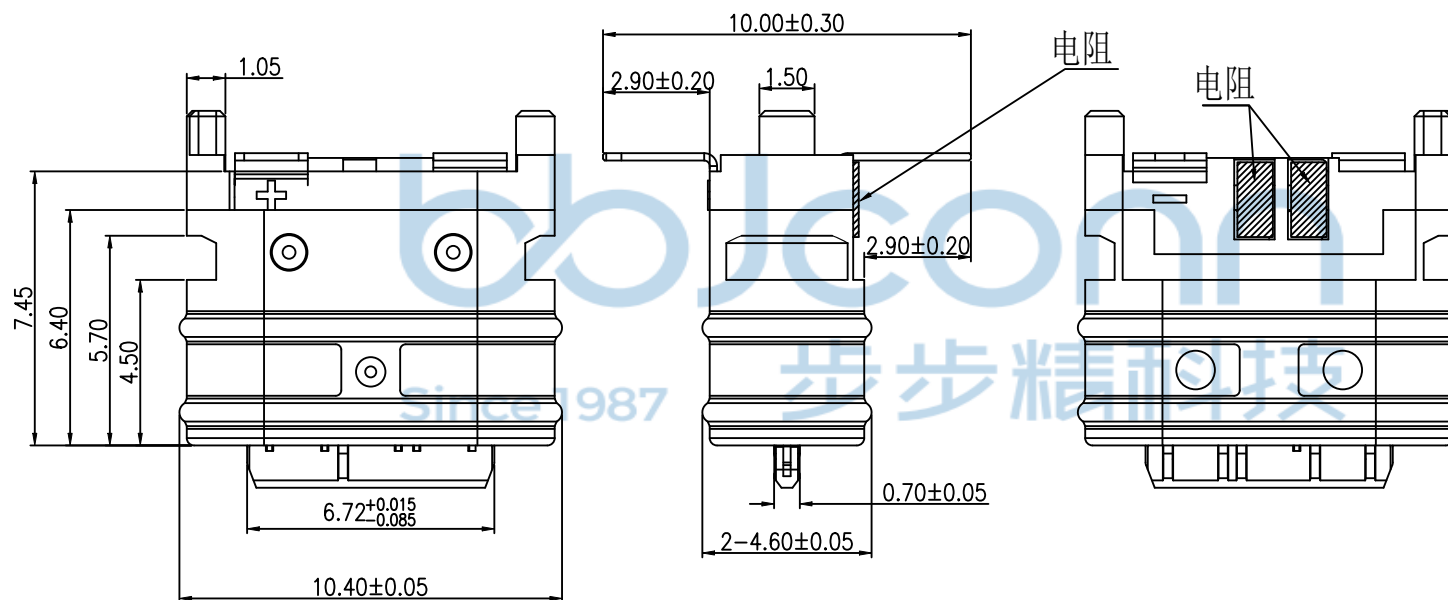

PIN DEFINE

CONN PIN	PCB PIN
B4 B9(VBUS)	P1正极
A5(CC) 5.1K Ω 电阻	P2
B5(CC) 5.1K Ω 电阻	P3
B1 B12(GND)	P4负极

6	电阻	2 PCS	5.1 $\pm$ 5% K Ω (0603)
5	中夹片	1 PCS	SUS301
4	MOLDING密封圈	1 PCS	TPE,BLACK,60度
3	MOLD 2	1 PCS	PA10T,BLACK
2	MOLD 1	1 PCS	PA6T,BLACK
1	Teaminal	1 PCS	C7025 T=0.2mm,Au:1u",Sn:80u"
序号	零件	数量	规格

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 9999-9

深圳市步步精科技有限公司

.X: $\pm$ 0.38
.XX: $\pm$ 0.25
.XXX: $\pm$ 0.13

X*: $\pm$ 3°
.X*: $\pm$ 1°
.XX*: $\pm$ 1°

NAME: TYPE C母座防水6P 直立SMT-MOLD3-有电阻

PJ. NO.: 126-224-060002-00G


SIZE: A4 DRW NO.: -----

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2




PE袋规格: 260*185

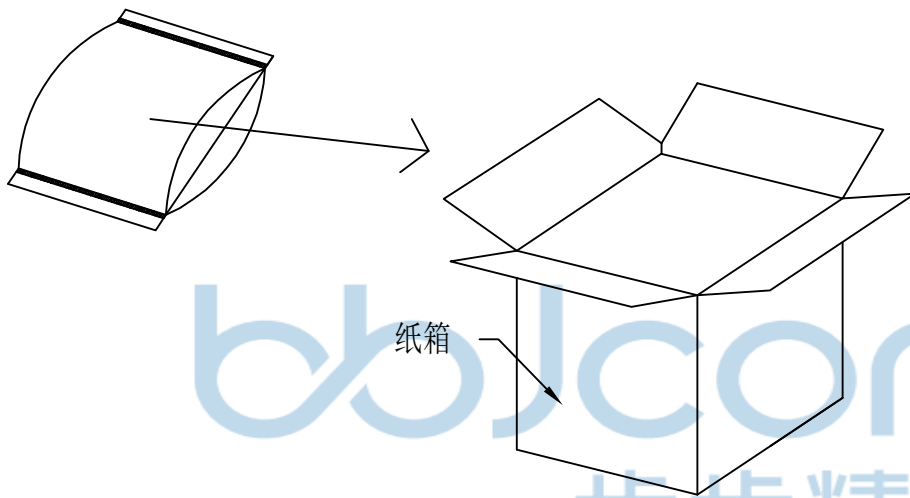

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	2023 08/14	HongGuang

成品标签

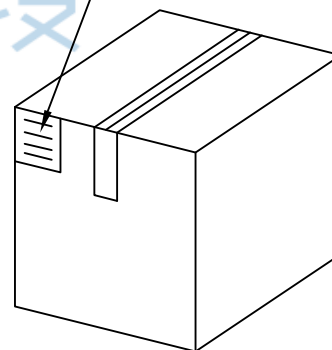

1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每15袋一个纸箱, 共计15000pcs;
- 1.3 纸箱外贴上标签

纸箱规格: 33.5*33.5*19CM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG:NO: 9999-9		深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±1* .XX*: ±1*	NAME: TYPE C母座防水6P 直立SMT-MOLD3-有电阻		
APPD.	JM_Zheng	20/08'23	PJ. NO.: 126-224-060002-00G		
CHKD.	DAX	20/08'23	SIZE: A4 DRW NO.: -----		
DR.	DAX	20/08'23	FINISH: SEE NOTES MAT'L.: SEE NOTES		
		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2