

| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | TSP      |

# MATERIAL:

HOUSING: PA46, PBT, BLACK.

TERMINAL: PHOSPHOR BRONZE Ø0.46MM  
G/FU" GOLD PLATING

SHIELD: C2680, T=0.20MM, 20 MIN NICKEL PLATING  
NO ALL AREA

# MACHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40 °C ~ +85 °C.

STORAGE TEMPERATURE: -40 °C ~ +85 °C.

ALL CRITICAL DIMENSIONS WITH "※"






VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.



INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
INITIAL 50 MILLIOHMS MAX. AFTER  
DURABILITY TEST.

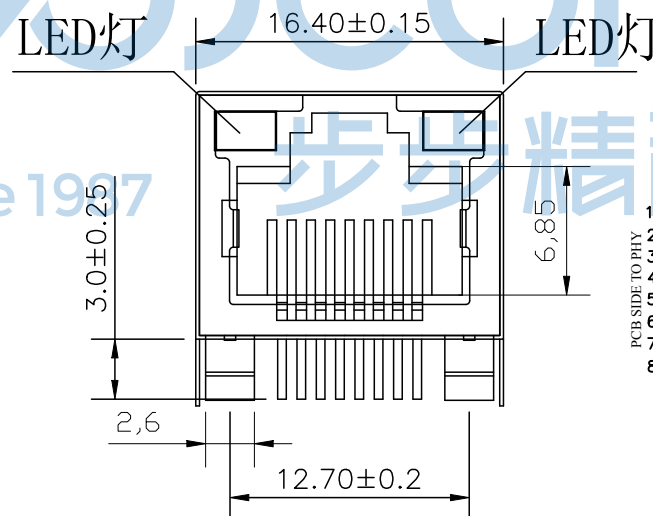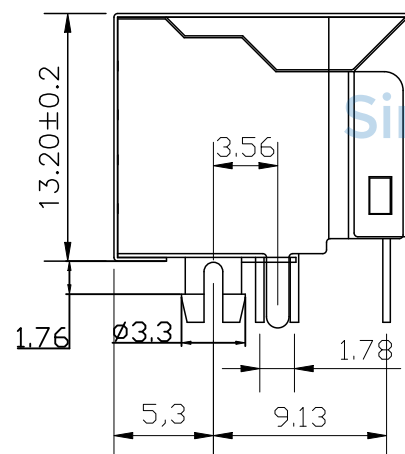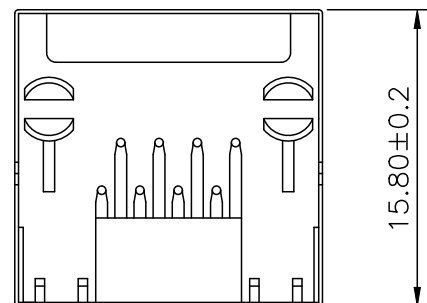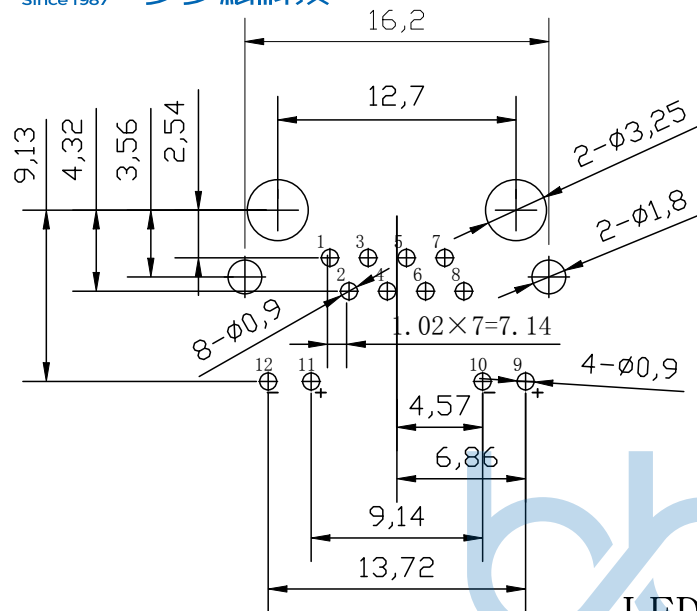


LED Specification

| Standard LED Color | LED Wavelength | Foward(A) | Foward(V)  |
|--------------------|----------------|-----------|------------|
| Green              | 568nm          | 20mA      | 1.85-2.45V |
| Green/ORANGE       | 585nm          | 20mA      | 1.7-2.2V   |



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG, NO: 0067-1

|                                                                     |                                        |
|---------------------------------------------------------------------|----------------------------------------|
| 深圳市步步精科技有限公司                                                        |                                        |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                              | X*: ±3"<br>.X*: ±2"<br>.XX*: ±1"       |
| NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.80<br>带灯 左绿右绿橙 无弹 全包 DIP 盒装 |                                        |
| APPD. JM_Zheng                                                      | PJ. NO.: 131-2K2-080002-T8G            |
| CHKD. LYX                                                           | SIZE: A4 DRW NO.:                      |
| DR. TSP                                                             | FINISH: SEE NOTES MAT'L.: SEE NOTES    |
|                                                                     | SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2 |

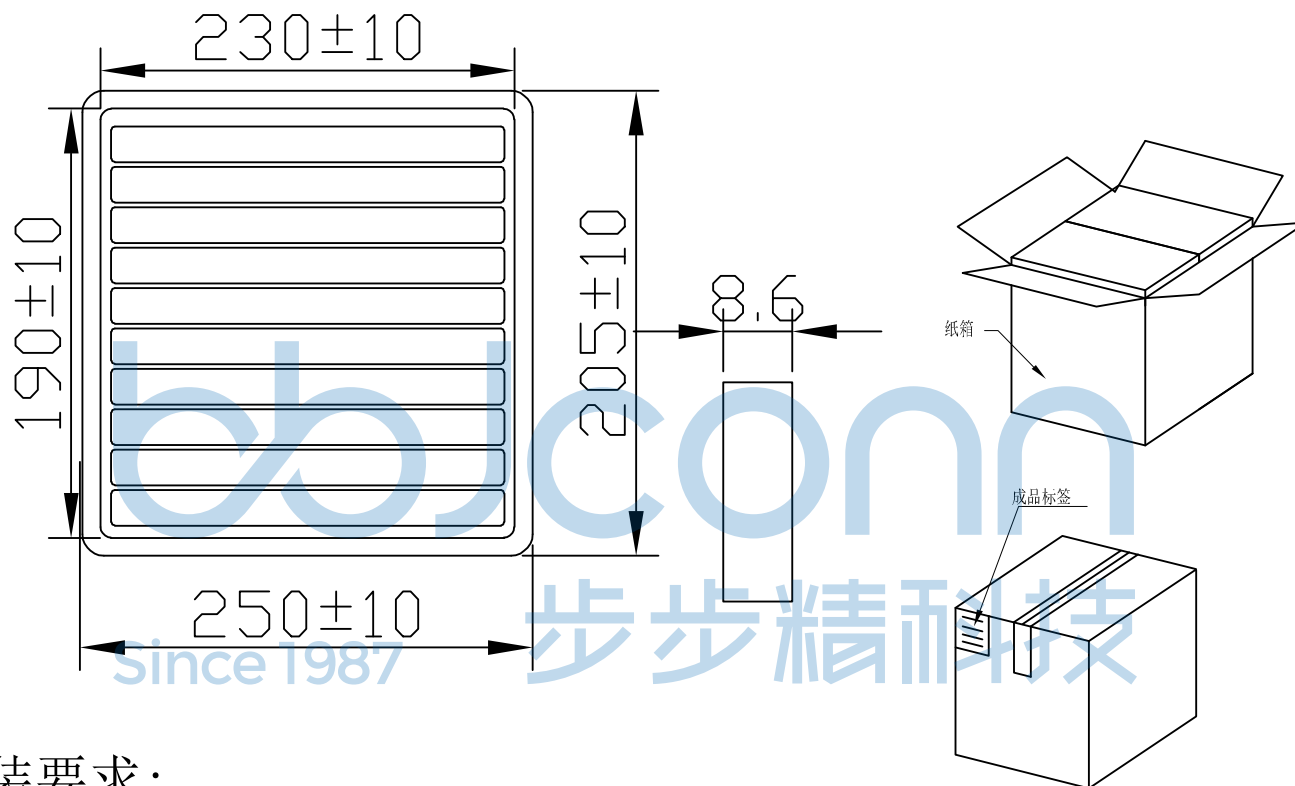

纸箱规格: 350\*210\*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每50盘放一箱, 共计5000PCS;
- 1.3 纸箱外贴上标签。

|                                                                                                                                                            |  |                                        |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  | 深圳市步步精科技有限公司                           |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                     |  | X*: ±3"<br>.X*: ±2"<br>.XX*: ±1"       |  |
| NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.80 带灯 左绿右绿橙 无弹 全包 DIP 盒装                                                                                           |  | PJ. NO.: 131-2K2-080002-T8G            |  |
| APPD. JM_Zheng                                                                                                                                             |  | SIZE: A4 DRW NO.:                      |  |
| CHKD. LYX                                                                                                                                                  |  | FINISH: SEE NOTES MAT'L.: SEE NOTES    |  |
| PDWG.NO: 0067-1                                                                                                                                            |  | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2 |  |
| DR. TSP                                                                                                                                                    |  |                                        |  |