
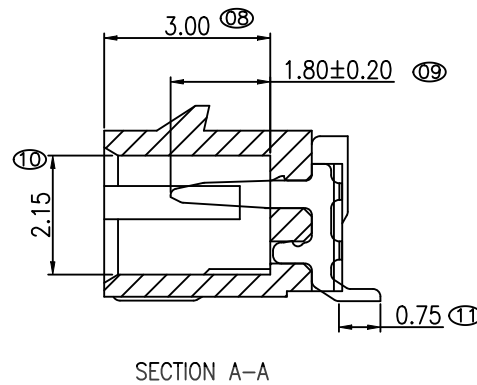


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	2024 02/29	Yan

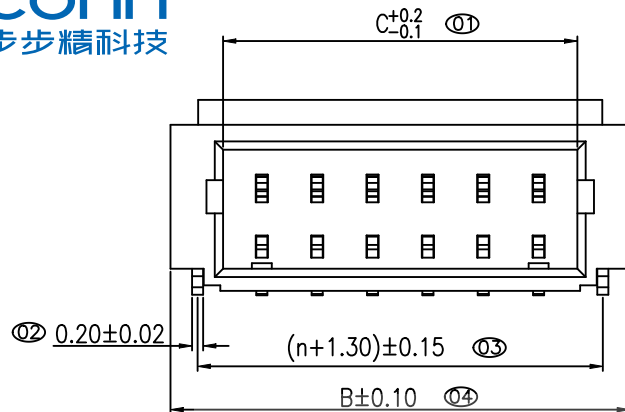



技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: $\leq 0.02\Omega$;
- 5、绝缘电阻: $\geq 100\text{M}\Omega$;
- 6、耐压: 500V, AC/minute.


料号说明:

123-241- XX 0001-00G

PIN位: 02: 2P
03: 3P

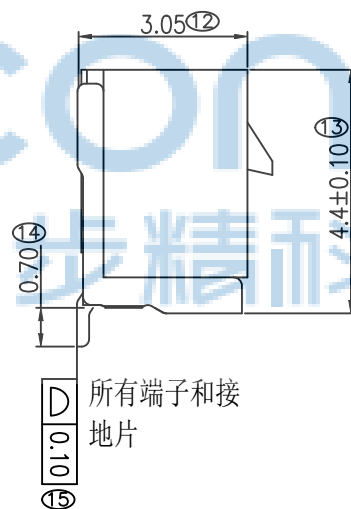
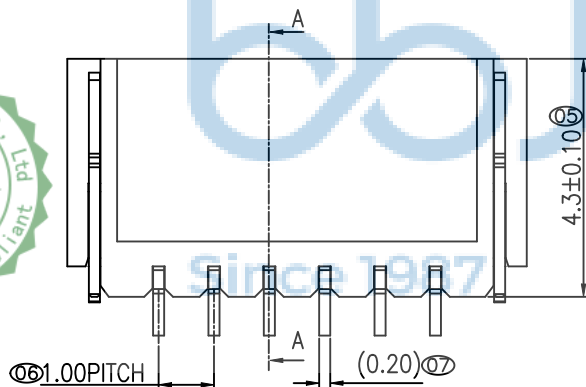


料号	孔位 poles	A	B	C	料号	孔位 poles	A	B	C
123-241-020001-00G	2	1.00	4.30	2.40	123-241-020001-00G	11	10.00	13.30	11.40
123-241-030001-00G	3	2.00	5.30	3.40	123-241-030001-00G	12	11.00	14.30	12.40
123-241-040002-00G	4	3.00	6.30	4.40	123-241-040002-00G	13	12.00	15.30	13.40
123-241-050001-00G	5	4.00	7.30	5.40	123-241-050001-00G	14	13.00	16.30	14.40
123-241-060002-00G	6	5.00	8.30	6.40	123-241-060002-00G	15	14.00	17.30	15.40
123-241-070001-00G	7	6.00	9.30	7.40	123-241-070001-00G	16	15.00	18.30	16.40
123-241-080002-00G	8	7.00	10.30	8.40	123-241-080002-00G	17	16.00	19.30	17.40
123-241-090001-00G	9	8.00	11.30	9.40	123-241-090001-00G	18	17.00	20.30	18.40
123-241-100002-00G	10	9.00	12.30	10.40	123-241-100002-00G	20	19.00	22.30	20.40

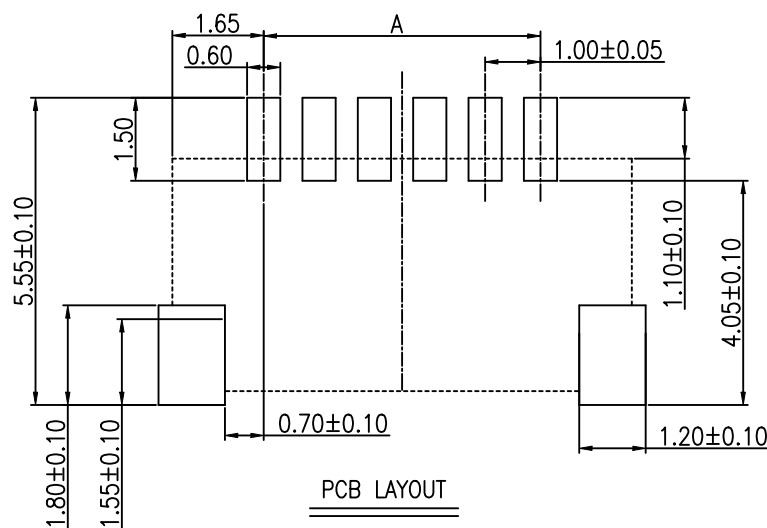


3	接地片	黄铜 BRASS	2	电镀(锡): 整个表面镀底镍30u"MIN, 镀锡 80u"MIN..
2	立贴端子	黄铜 BRASS	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 镀锡 80u"MIN..
1	胶芯主体	LCP (UL94V-0)	1	高温材料, 本色, UL94 V-0
序号	名称	材料	数量	规格描述

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.25 .XX: ± 0.20 .XXX: ± 0.10		X*: $\pm 3^{\circ}$.X*: $\pm 1^{\circ}$.XX*: $\pm 1^{\circ}$	
APPD.		NAME: 针座 1.0T-10P 卧贴 带扣 米黄色	
CHKD.		PJ. NO.: 123-241-100002-00G	
PDWG,NO: 9999-9		SIZE: A4 DRW NO.: CC23-0035	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
		DR. Yan 24/02/09	

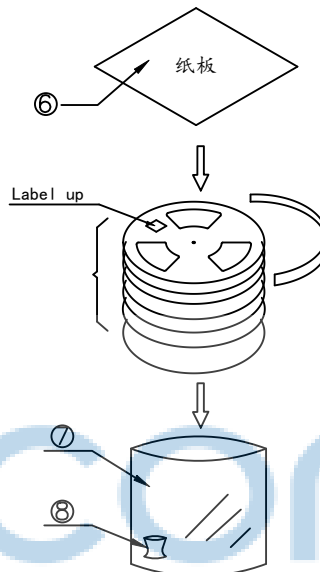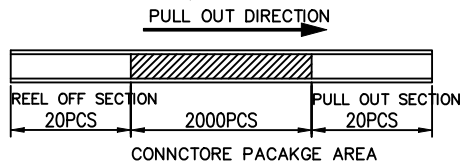

User Direction of Unreeling
PEELING SPEED 200mm/Min

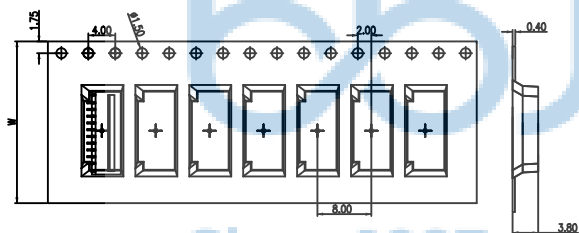

- 一、包装方式:
每料盘封装2000PCS产品 (图1), XX盘 (叠放方式见图2)
装一箱 (图3)。
- 二、包装数量:
2000pcsX XX盘=XXpcs, 数量见包装数量对照表
- 三、产品单重:XXg, 净重XX Kg, 包装材料毛重XX Kg, 总重XX±1Kg.
- 四、存储条件: 温度-40℃~85℃ 湿度<85%RH
- 五、我司保存期限: 6个月
- 六、料件使用期限: 12个月
- 七、最小包装以及外包装盒都应有RoHS标签或标识。




包装数量对照表

PIN数	W (mm)	XX PCS/卷	一箱包装数量	说明
2P	16	2000	30000	
3P			30000	
4P			30000	
5P	24		20000	
6P			20000	
7P			20000	
8P			20000	
9P			20000	
10P			20000	
11P			20000	
12P			20000	
13P	20000			
14P	20000			
15P	32		16000	
16P			16000	





PULL OUT DIRECTION
COVER TYPE PEELING FORCE:
PEELING SPEED 200mm/Min

A	165°~180°
F	0.1N~1.3N

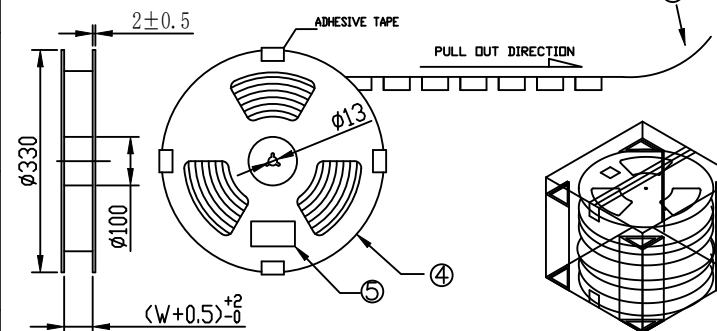

图二

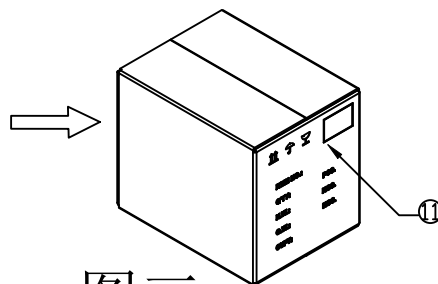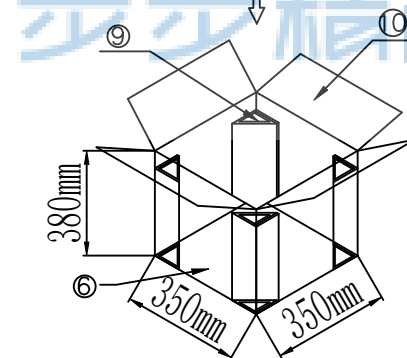

图三

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 9999-9

DR. Yan 24/02/09

深圳市步步精科技有限公司

NAME: 针座 1.0T-10P 卧贴 带扣 米黄色

PJ. NO.: 123-241-100002-00G

SIZE: A4 DRW NO.: CC23-0035

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2