

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		初版发行	2024 02/29	Yan

技术指标:


- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: $\leq 0.02\Omega$;
- 5、绝缘电阻: $\geq 100\text{M}\Omega$;
- 6、耐压: 500V, AC/minute.

料号说明:




123-244- XX 0001-00G

PIN位: 02: 2P

03: 3P

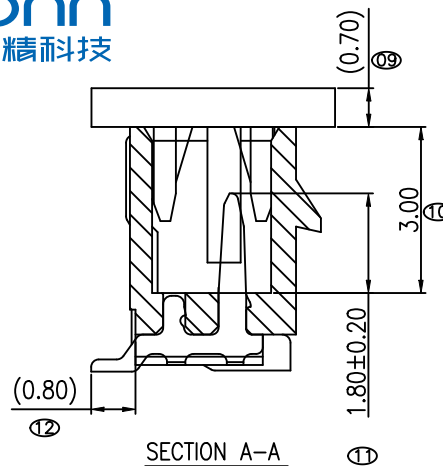


SECTION A-A

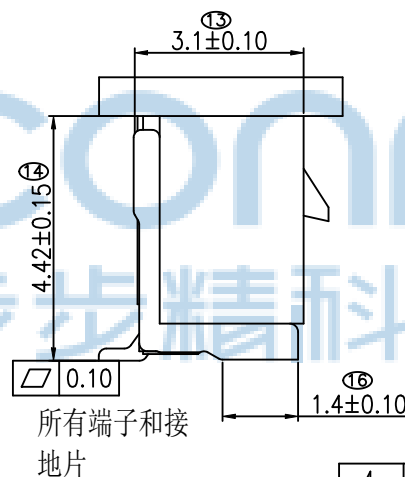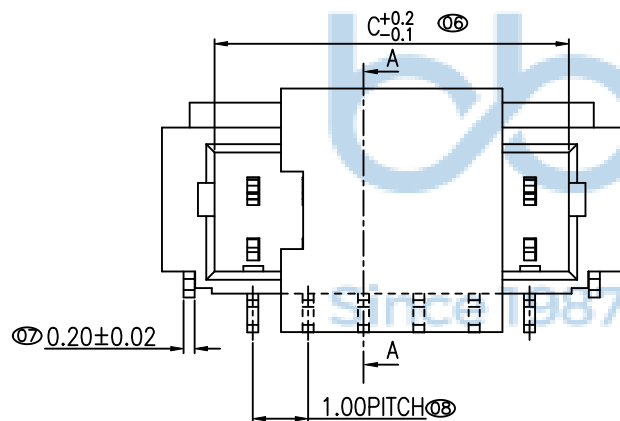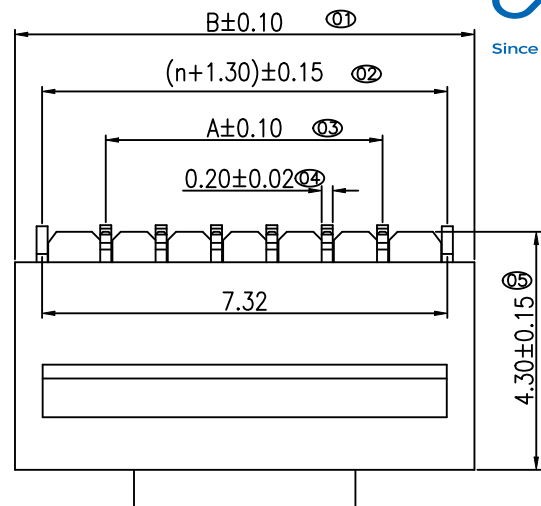所有端子 and
接地片

料号	孔位 poles	A	B	C	料号	孔位 poles	A	B	C
123-244-020001-00G	2	1.00	4.30	2.40	123-244-110001-00G	11	10.00	13.30	11.40
123-244-030001-00G	3	2.00	5.30	3.40	123-244-120001-00G	12	11.00	14.30	12.40
123-244-040001-00G	4	3.00	6.30	4.40	123-244-130001-00G	13	12.00	15.30	13.40
123-244-050001-00G	5	4.00	7.30	5.40	123-244-140001-00G	14	13.00	16.30	14.40
123-244-060001-00G	6	5.00	8.30	6.40	123-244-150001-00G	15	14.00	17.30	15.40
123-244-070001-00G	7	6.00	9.30	7.40	123-244-160001-00G	16	15.00	18.30	16.40
123-244-080001-00G	8	7.00	10.30	8.40	123-244-170001-00G	17	16.00	19.30	17.40
123-244-090001-00G	9	8.00	11.30	9.40	123-244-180001-00G	18	17.00	20.30	18.40
123-244-100001-00G	10	9.00	12.30	10.40	123-244-200001-00G	20	19.00	22.30	20.40



4	夹持盖	LCP (UL94V-0)	1	高温材料, 本色, UL94 V-0
3	接地片	黄铜 BRASS	2	电镀(锡): 整个表面镀底镍30u"MIN, 镀锡 80u"MIN..
2	立贴端子	黄铜 BRASS	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 镀锡 80u"MIN..
1	胶芯主体	LCP (UL94V-0)	1	高温材料, 本色, UL94 V-0
序号	名 称	材 料	数 量	规格 描述

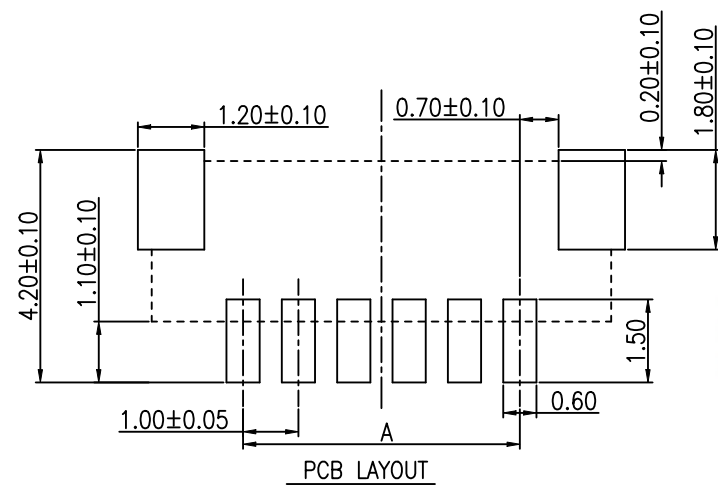


PCB LAYOUT



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.25 .XX: ± 0.20 .XXX: ± 0.10		NAME: 针座 1.0-5P立贴 带扣 加盖 米黄色	
X*: $\pm 3^{\circ}$ X*: $\pm 1^{\circ}$ XX*: $\pm 1^{\circ}$		P.J. NO.: 123-244-050001-00G SIZE: A4 DRW NO.: CC23-0034	
APPD.		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
PDWG.NO: 9999-9		DR. Yan 24/02/29	

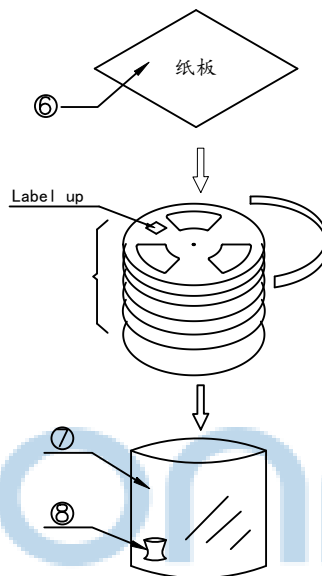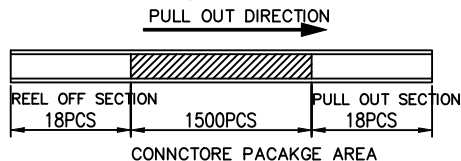

PULL OUT DIRECTION
User Direction of Unreeling
PEELING SPEED 200mm/Min

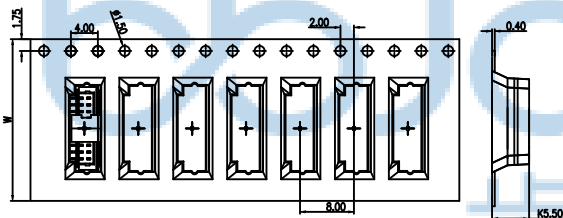

- 一、包装方式：
每料盘封装1500PCS产品（图1），XX盘（叠放方式见图2）
装一箱（图3）。
- 二、包装数量：
1500pcsX XX盘=XXpcs, 数量见包装数量对照表
- 三、产品单重:XXg, 净重XX Kg, 包装材料毛重XX Kg, 总重XX±1Kg.
- 四、存储条件: 温度-40℃~85℃ 湿度<85%RH
- 五、我司保存期限: 6个月
- 六、料件使用期限: 12个月
- 七、最小包装以及外包装盒都应有RoHS标签或标识。




包装数量对照表



PIN数	W (mm)	XX PCS/卷	一箱包装数量	说明
2P	16	1500	22500	
3P			22500	
4P			22500	
5P	24		15000	
6P			15000	
7P			15000	
8P			15000	
9P			15000	
10P			15000	
11P			15000	
12P			15000	
13P			15000	
14P			15000	
15P	32		12000	
16P			12000	

PULL OUT DIRECTION
COVER TYPE PEELING FORCE:
PEELING SPEED 200mm/Min

A	165°~180°
F	0.1N~1.3N

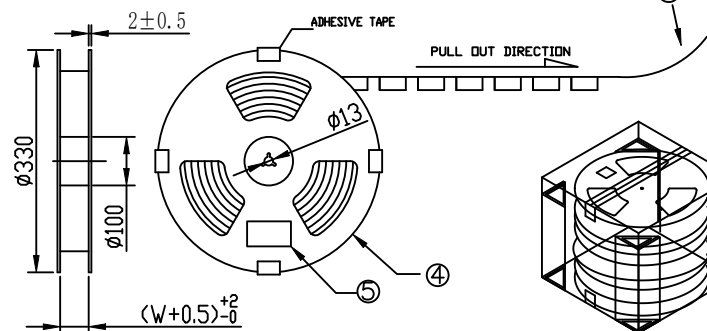

图二

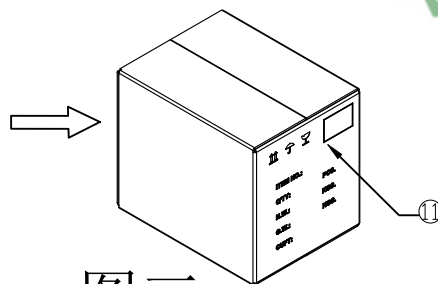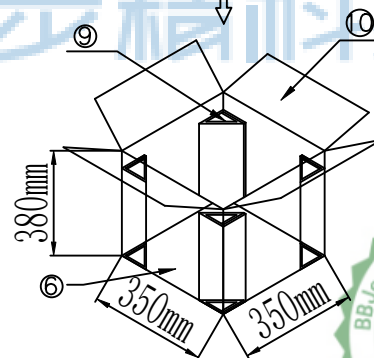

图三

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 9999-9

深圳市步步精科技有限公司
NAME: 针座 1.0-5P立贴 带扣 加盖 米黄色
PJ. NO123-244-050001-00G
SIZE: A4 DRW NO.: CC23-0034
FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2