

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

技术参数:

- 1、额定值: 1.0A AC/DC.
- 2、额定电压: 50V AC/DC.
- 3、接触电阻: 20mΩ Max.
- 4、绝缘电阻: 100MΩ Min.
- 5、耐电压: 500V ACminute
- 6、使用温度: -25~+85℃.



CKT	DIM A	DIM B
1.5-2P	1.50	6.00
1.5-3P	3.00	7.50
1.5-4P	4.50	9.00
1.5-5P	6.00	10.50
1.5-6P	7.50	12.00
1.5-7P	9.00	13.50
1.5-8P	10.50	15.00
1.5-9P	12.00	16.50
1.5-10P	13.50	18.00
1.5-11P	15.00	19.50
1.5-12P	16.50	21.00
1.5-13P	18.00	22.50
1.5-14P	19.50	24.00
1.5-15P	21.00	25.50
1.5-16P	22.50	27.00
1.5-17P	24.00	28.50
1.5-18P	25.50	30.00
1.5-19P	27.00	31.50
1.5-20P	28.50	33.00

序号	产品名称	材料规格	表面处理/颜色	数量
1	底座	VicrystR8530LCP	米黄色	1
2	簧片	黄铜	镀锡	N
3	焊片	黄铜	镀锡	2
4	吸取盖	VicrystR8530LCP	米黄色	1













THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 1002-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 针座 ZH-1.5-3P 立贴 战斗版 加盖编带	
APPD	JM_Zheng	PJ NO: 123-264-030001-J8G	
CHKD	LYX	SIZE:A4 DRW NO:	
DR		FINISH:SEE NOTES	MAT'L:SEE NOTES
		SCALE:N/A	REV:A0
		UNIT:mm	PAGE:1/2

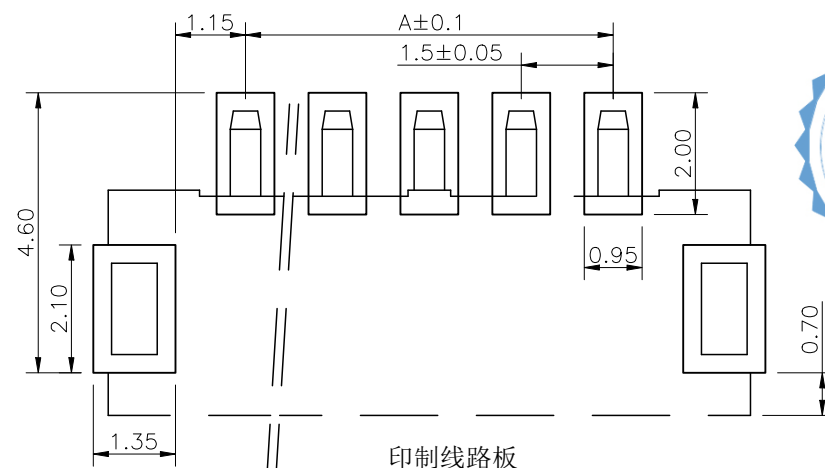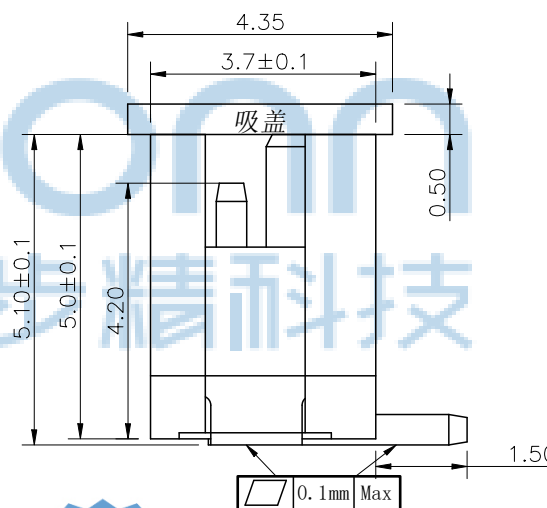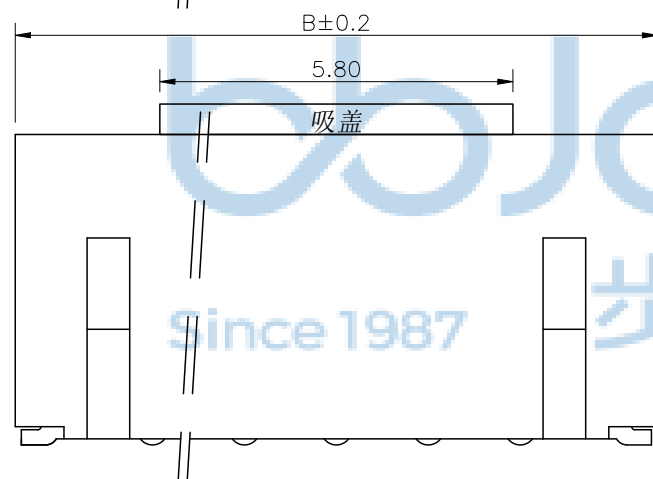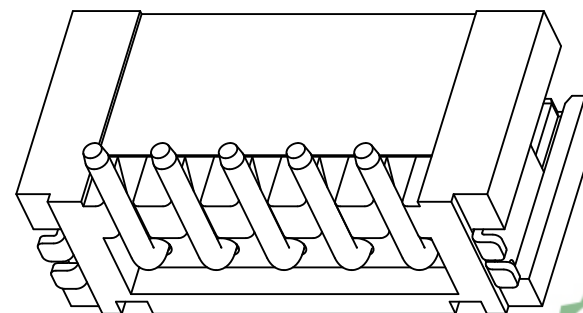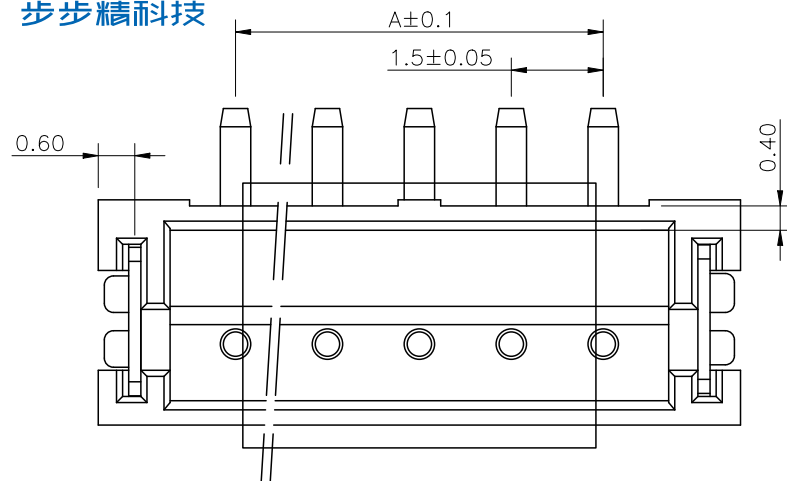

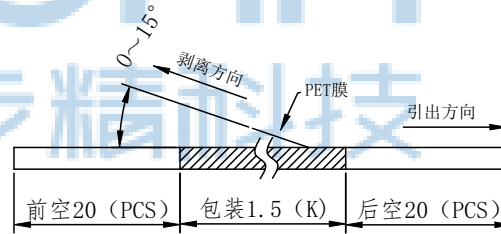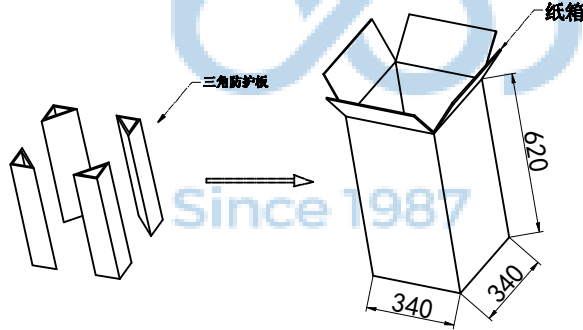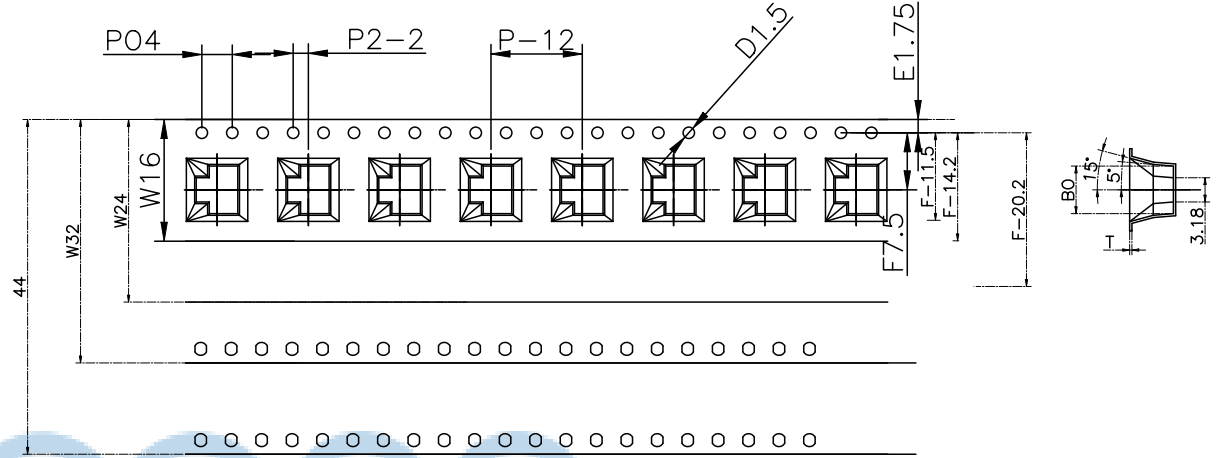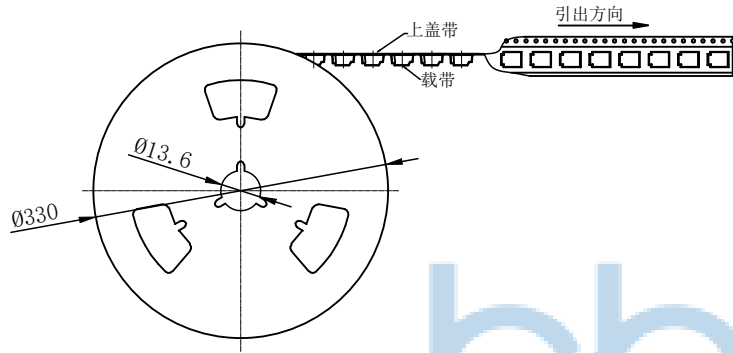

产品名称	载带尺寸		
1.5立式贴片	W	Bo	F
1.5-2P	16±0.3	6.25±0.1	7.5±0.1
1.5-3P	16±0.3	7.75±0.1	7.5±0.1
1.5-4P	24±0.3	9.25±0.1	11.5±0.1
1.5-5P	24±0.3	10.75±0.1	11.5±0.1
1.5-6P	24±0.3	12.25±0.1	11.5±0.1
1.5-7P	24±0.3	13.75±0.1	11.5±0.1
1.5-8P	24±0.3	15.25±0.1	11.5±0.1
1.5-9P	32±0.3	16.75±0.1	14.2±0.1
1.5-10P	32±0.3	18.25±0.1	14.2±0.1
1.5-11P	32±0.3	19.75±0.1	14.2±0.1
1.5-12P	32±0.3	21.25±0.1	14.2±0.1
1.5-13P	44±0.3	22.75±0.1	20.2±0.1
1.5-14P	44±0.3	24.25±0.1	20.2±0.1
1.5-15P	44±0.3	25.75±0.1	20.2±0.1
1.5-16P	44±0.3	27.25±0.1	20.2±0.1

转装包装明细			
PIN位	每转包装数	每箱盘数	每箱只数
02P-03P	1000 (PCS)	20 (盘)	20 (K)
04P-08P	1000 (PCS)	14 (盘)	14 (K)
09P-13P	1000 (PCS)	11 (盘)	11 (K)
14P-16P	1000 (PCS)	8 (盘)	8 (K)



物料及技术参数	
载带	PS 雾透色 t=0.3
盖带	热封/自粘上盖带: PET=0.05mm
纸箱	纤维板, 波纹, 双墙, 黄色
转盘	聚苯乙烯, 耐热温度70℃, 蓝色
PET膜剥离力	30-70g, 剥离速度300mm/分钟
带子前后预留	前空20PCS, 后空20PCS

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		APPD JM_Zheng		NAME: 针座 ZH-1.5-3P 立贴 战斗版 加盖编带	
CHKD LYX		PJD SGF		PJ NO: 123-264-030001-J8G		SIZE:A4 DRW NO:	
PDWG NO: 1002-1		DR SGF		FINISH:SEE NOTES		MAT'L:SEE NOTES	
				SCALE:N/A		REV:A0 UNIT:mm PAGE:2/2	

深圳市步步精科技有限公司