

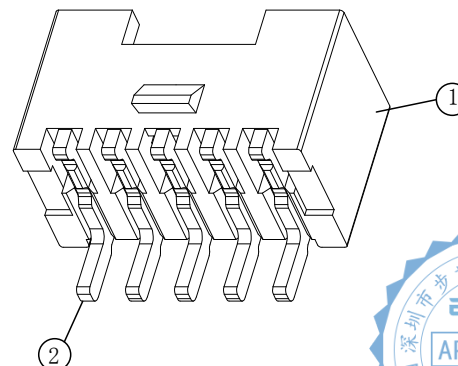
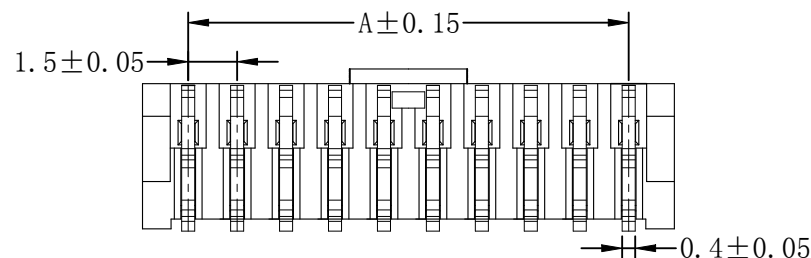






技术要求:

- 1、塑件材料: LCP (UL-94V-0)
- 2、接触件: 黄铜镀锡
- 3、接触电阻: $\leq 10\text{m}\Omega$
- 4、绝缘电阻: $\geq 1000\text{M}\Omega$
- 5、额定电压: 250V AC DC
- 6、额定电流: 2.0A AC DC
- 7、耐压: 能承受1000V AC/Minute
- 8、工作温度: $-25^{\circ}\sim +105^{\circ}$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 260^{+5}_{-0} , 时间 2.5 ± 0.5 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

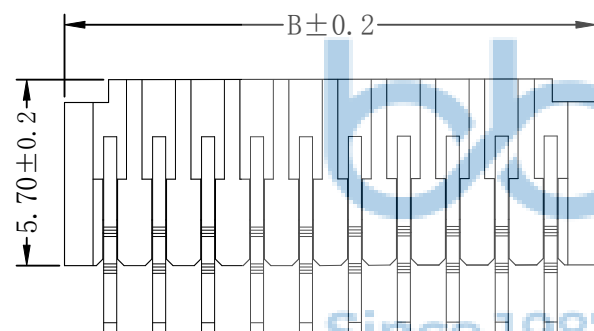

SECTION A-A

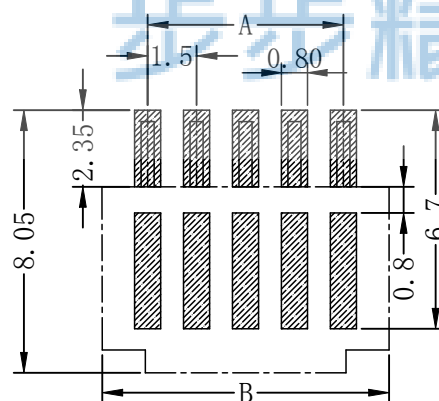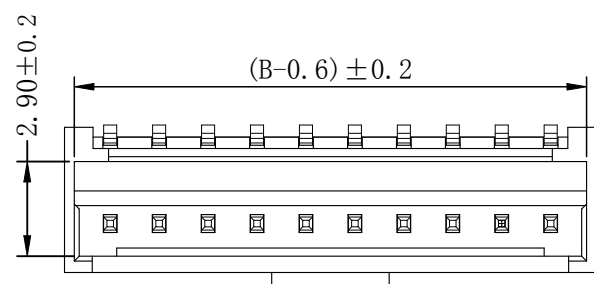

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)





型号 Type	尺寸 Dimensions (mm)	
卧式 AWR (90°)	A	B
MX1.5-2A	1.50	4.30
MX1.5-3A	3.00	5.80
MX1.5-4A	4.50	7.30
MX1.5-5A	6.00	8.80
MX1.5-6A	7.50	10.30
MX1.5-7A	9.00	11.80
MX1.5-8A	10.50	13.30
MX1.5-9A	12.00	14.80
MX1.5-10A	13.50	16.30
MX1.5-11A	15.00	17.80
MX1.5-12A	16.50	19.30
MX1.5-13A	18.00	20.80



	端子 Contact	黄铜 Brass	n*1	电镀(锡)：整个表面镀底镍30u"MIN, 再镀锡80u", MIN
	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名 称	材 料	数 量	附 注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0510-1

深圳市步步精科技有限公司	
NAME: 针座 Molex 1.5-6P 卧贴 带扣 米黄色	
APPD. JM_Zheng	PJ. NO.: WT.05.63-73-M001
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

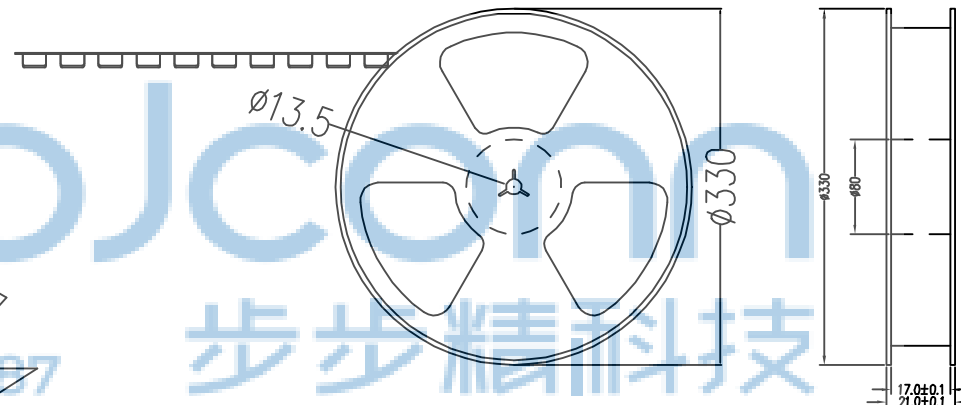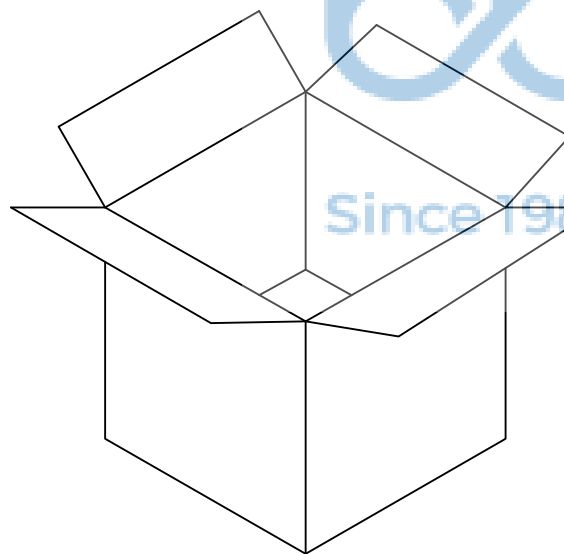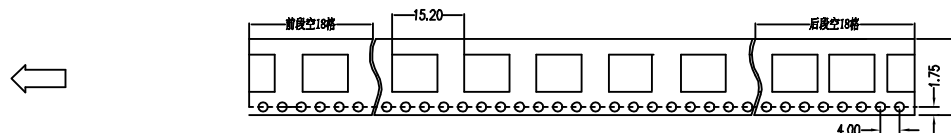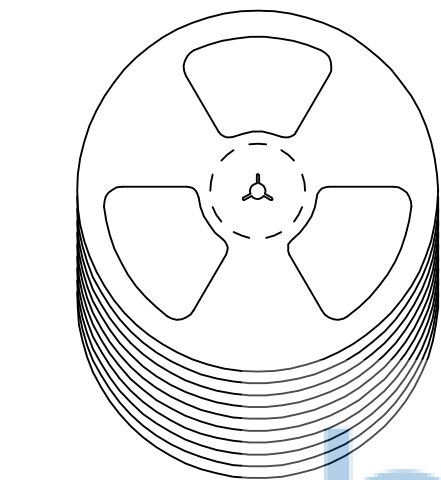

备注:

- 包装数量: 1000/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
 - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0510-1		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	NAME: 针座 Molex 1.5-6P 卧贴 带扣 米黄色	
APPD.	JM_Zheng		PJ. NO.: WT.05.63-73-M001
CHKD.	LYX		SIZE: A4 DRW NO.:
DR.		TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2