
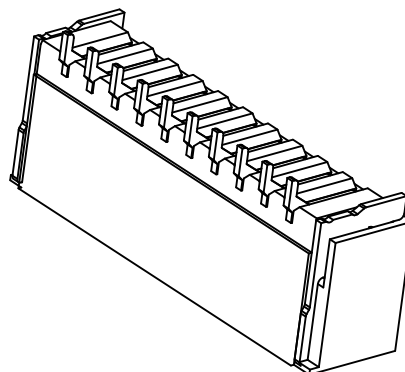
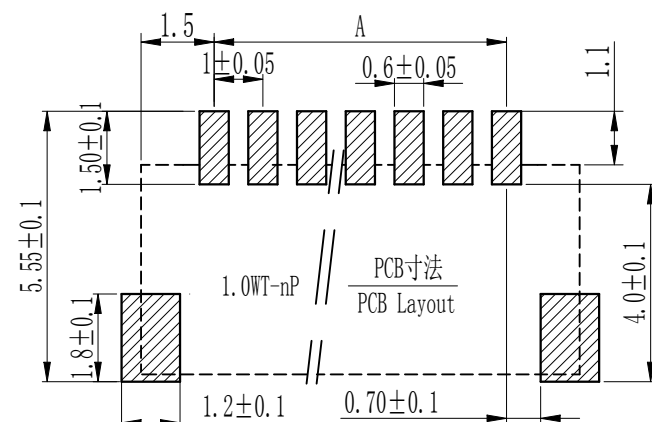
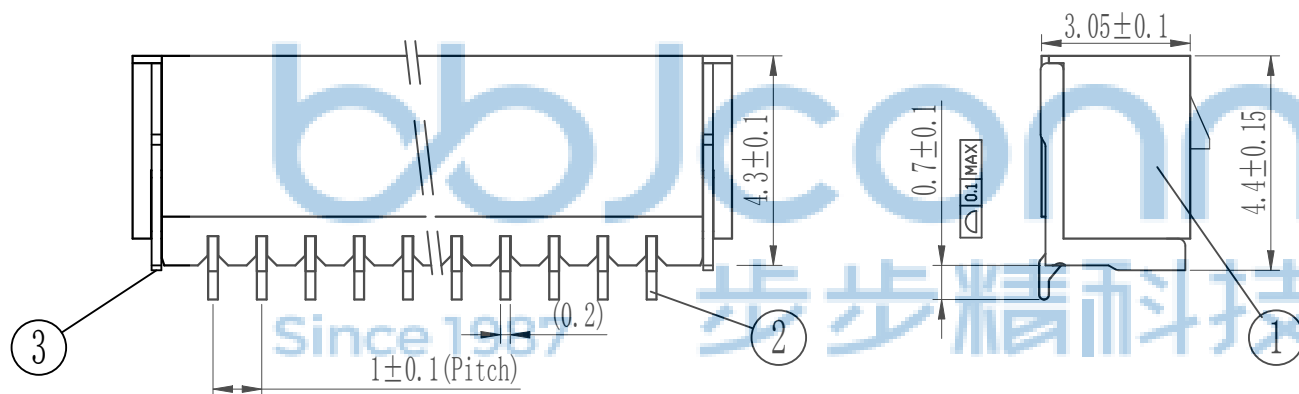
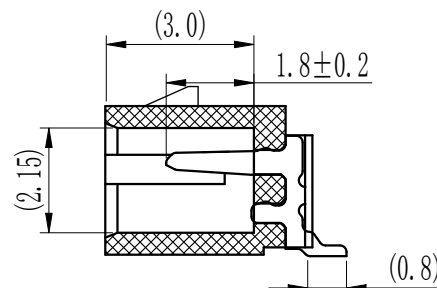


| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围:  $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ ;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻:  $\leq 0.03\Omega$ ;
- 5、绝缘电阻:  $\geq 1000\text{M}\Omega$ ;
- 6、耐压: 800V, AC/minute.

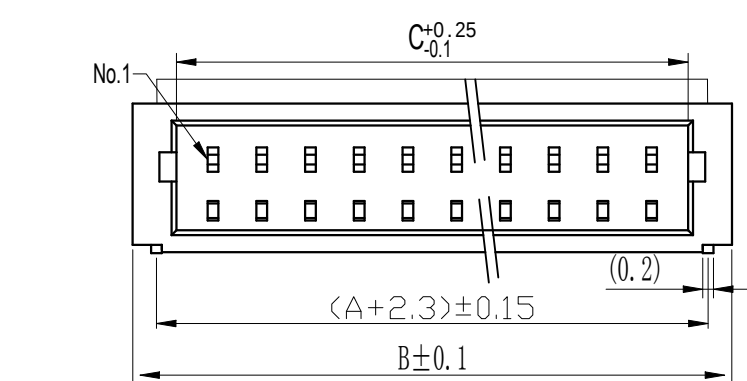


| 孔位<br>poles | A  | B    | C    |
|-------------|----|------|------|
| 2           | 1  | 4..3 | 2.4  |
| 3           | 2  | 5.3  | 3.4  |
| 4           | 3  | 6.3  | 4.4  |
| 5           | 4  | 7.3  | 5.4  |
| 6           | 5  | 8.3  | 6.4  |
| 7           | 6  | 9.3  | 7.4  |
| 8           | 7  | 10.3 | 8.4  |
| 9           | 8  | 11.3 | 9.4  |
| 10          | 9  | 12.3 | 10.4 |
| 11          | 10 | 13.3 | 11.4 |
| 12          | 11 | 14.3 | 12.4 |
| 13          | 12 | 15.3 | 13.4 |
| 14          | 13 | 16.3 | 14.4 |
| 15          | 14 | 17.3 | 15.4 |
| 16          | 15 | 18.3 | 16.4 |

| 3  | 焊片 Fitting Nail | 磷青铜 Phosphor Bronze | 2   | 电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.. |
|----|-----------------|---------------------|-----|--------------------------------------|
| 2  | 端子 Contact      | 磷青铜 Phosphor Bronze | n*1 | 电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.. |
| 1  | 基座 Wafer        | LCP(UL94V-0)        | 1   | 本色                                   |
| 序号 | 名称              | 材料                  | 数量  | 附注                                   |

|                                                                                                                                                            |  |                            |  |                           |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------|--|---------------------------|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  | PDWG.NO: 0510-1            |  | NAME: 针座 1.0-4P 卧贴 带扣 米黄色 |  |
| .X: ±0.38 .XX: ±0.25 .XXX: ±0.13                                                                                                                           |  | X": ±3" .X": ±2" .XX": ±1" |  | PJ. NO.: WT.10.63-73-M006 |  |
| APPD. JM_Zheng                                                                                                                                             |  | CHKD. LYX                  |  | SIZE: A4 DRW NO.:         |  |
| DR. TSP                                                                                                                                                    |  | FINISH: SEE NOTES          |  | MAT'L.: SEE NOTES         |  |
|                                                                                                                                                            |  | SCALE: N/A                 |  | REV.: A0                  |  |
|                                                                                                                                                            |  | UNIT: mm                   |  | PAGE: 1/3                 |  |






| REV. | ECN NO. | CONTENT | DATE | ENGINEER |
|------|---------|---------|------|----------|
| A0   |         |         |      |          |

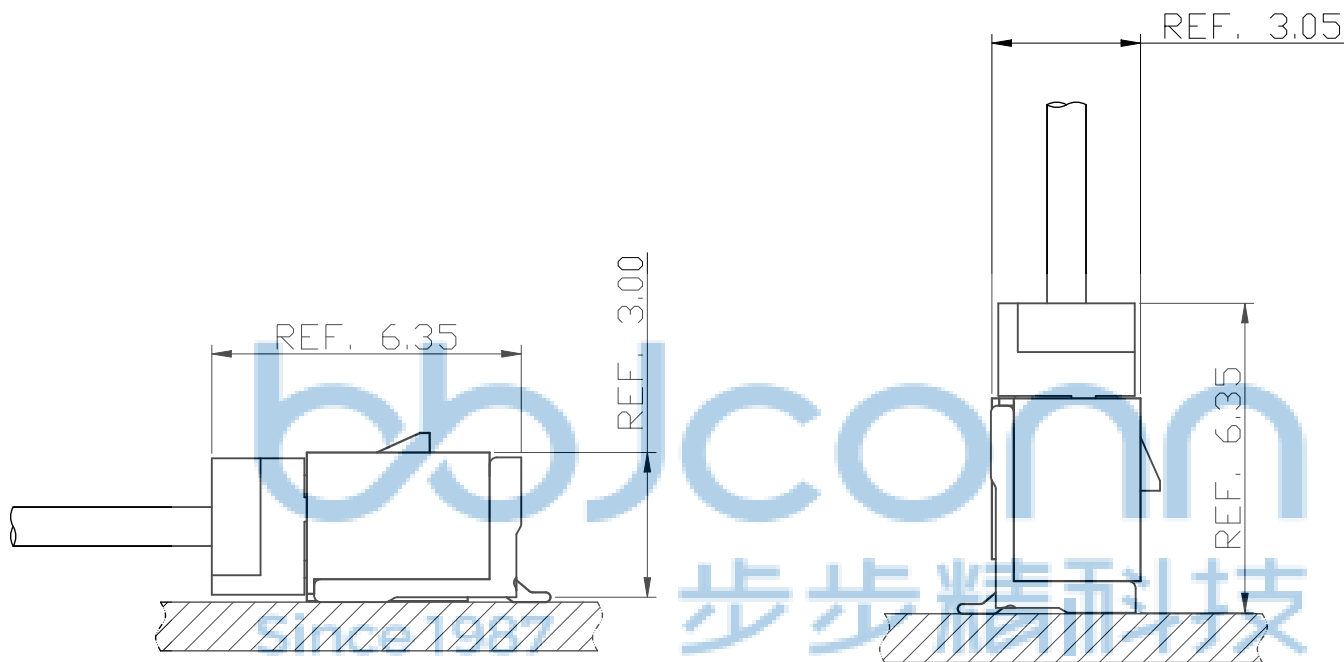




|                                                                                                                                                             |          |                                        |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------------------------|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司                           |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                      |          | X*: ±3"<br>.X*: ±2"<br>.XX*: ±1"       |  |
| APPD.                                                                                                                                                       | JM_Zheng | NAME: 针座 1.0-4P 卧贴 带扣 米黄色              |  |
| CHKD.                                                                                                                                                       | LYX      | PJ. NO.: WT.10.63-73-M006              |  |
| PDWG.NO: 0510-1                                                                                                                                             | DR. TSP  | SIZE: A4 DRW NO.:                      |  |
|                                                                                                                                                             |          | FINISH: SEE NOTES MAT'L.: SEE NOTES    |  |
|                                                                                                                                                             |          | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3 |  |



| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |

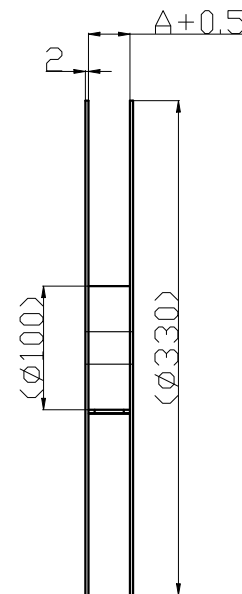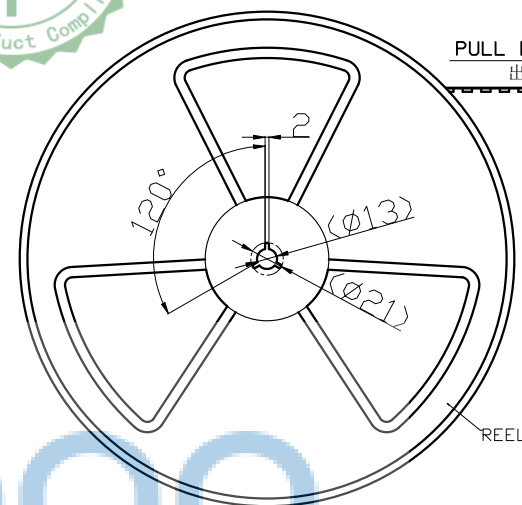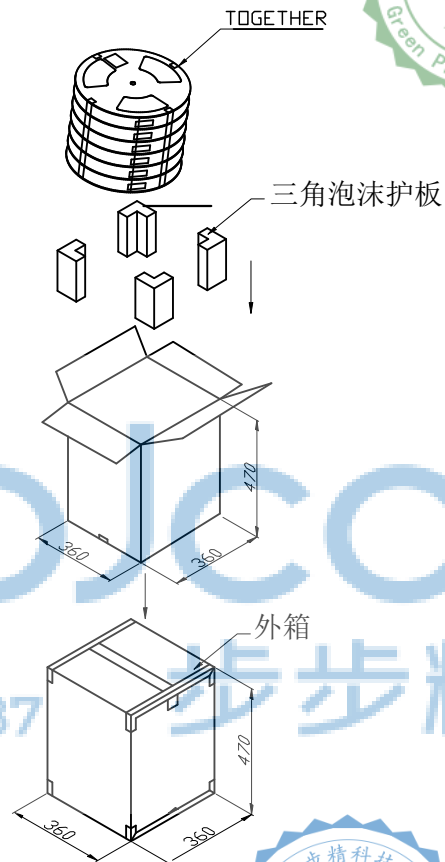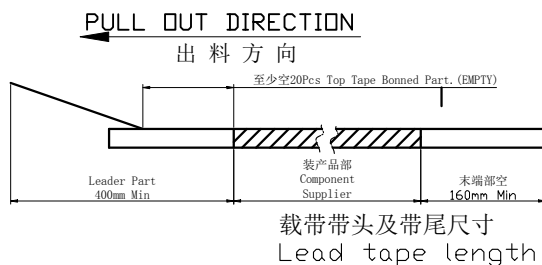

载带上下带剥离强度: 0.1N--1.3N(10g-130g)  
Peeling off force of top tape:  
0.1N--1.3N(10g-130g)

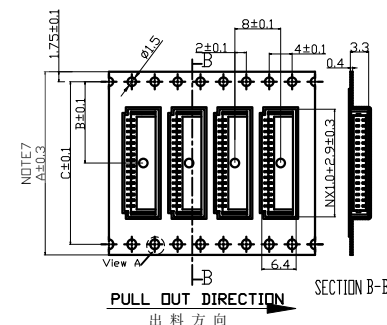

Note:

- 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ (Accumulative Pitch  $\pm 0.2$ )
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness:0.4 $\pm 0.1$ mm.
- 5.Material of top fape:PET,PE,PEF
- 6.Material of carrier fape:Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A)32mm and 44mm pilot holes are provided on both sides.



| 芯数<br>Pin (n) | 尺寸 Size |      |      |
|---------------|---------|------|------|
|               | A       | B    | C    |
| 2-6           | 16.0    | 7.5  | ---  |
| 7-14          | 24.0    | 11.5 | ---  |
| 15-16         | 32.0    | 14.2 | 28.4 |

| 1. OWT-nP  |             |    |    |    |
|------------|-------------|----|----|----|
| REEL WIDTH | 16          | 24 | 32 | 44 |
| PCS/REEL   | 2000        |    |    |    |
| CTN. SIZE  | 360*360*470 |    |    |    |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0510-1

APPD. JM\_Zheng  
CHKD. LYX  
DR. TSP

.X:  $\pm 0.38$   
.XX:  $\pm 0.25$   
.XXX:  $\pm 0.13$

X':  $\pm 3'$   
X':  $\pm 2'$   
XX':  $\pm 1'$



深圳市步步精科技有限公司

NAME: 针座 1.0-4P 卧贴 带扣 米黄色

PJ. NO.: WT.10.63-73-M006

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3