
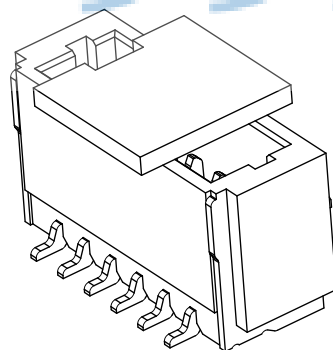
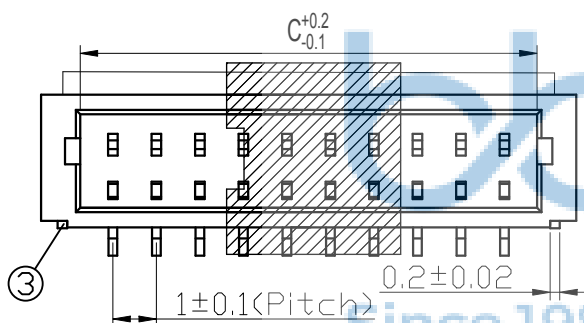
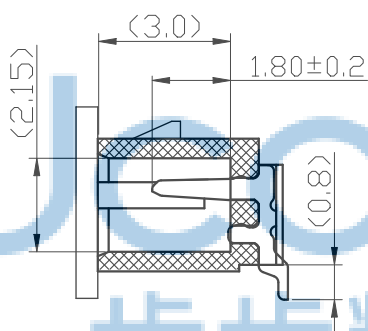
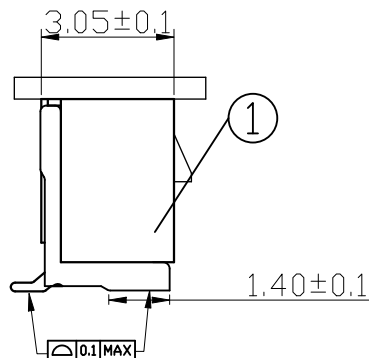


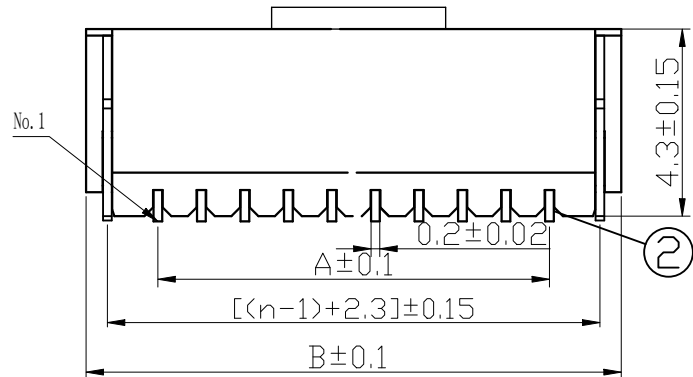

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: -25° C~+85° C;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: ≤0.02 Ω;
- 5、绝缘电阻: ≥100M Ω;
- 6、耐压: 500V, AC/minute.

孔位 poles	A	B	C
2	1	4.3	2.4
3	2	5.3	3.4
4	3	6.3	4.4
5	4	7.3	5.4
6	5	8.3	6.4
7	6	9.3	7.4
8	7	10.3	8.4
9	8	11.3	9.4
10	9	12.3	10.4
11	10	13.3	11.4
12	11	14.3	12.4
13	12	15.3	13.4
14	13	16.3	14.4
15	14	17.3	15.4
16	15	18.3	16.4
17	16	19.3	17.4
18	17	20.3	18.4
19	18	21.3	19.4
20	19	22.3	20.4

1. 0LT-nP PCB寸法
PCB Layout

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ±0.38 X*: ±3*
.XX: ±0.25 .X*: ±2*
.XXX: ±0.13 .XX*: ±1*

NAME: 针座 1.0-4P 立贴 带扣 加盖 米黄色

APPD. JM_Zheng

PJ. NO.: WT.10.63-85-M002

CHKD. LYX

SIZE: A4 DRW NO.:

DR. TSP

FINISH: SEE NOTES MAT'L.: SEE NOTES



PDWG.NO: 0510-1

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3

3	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN.
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN.
1	基座 Wafer	LCP(UL94V-0)	1	本色
序号	名称	材料	数量	附注




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

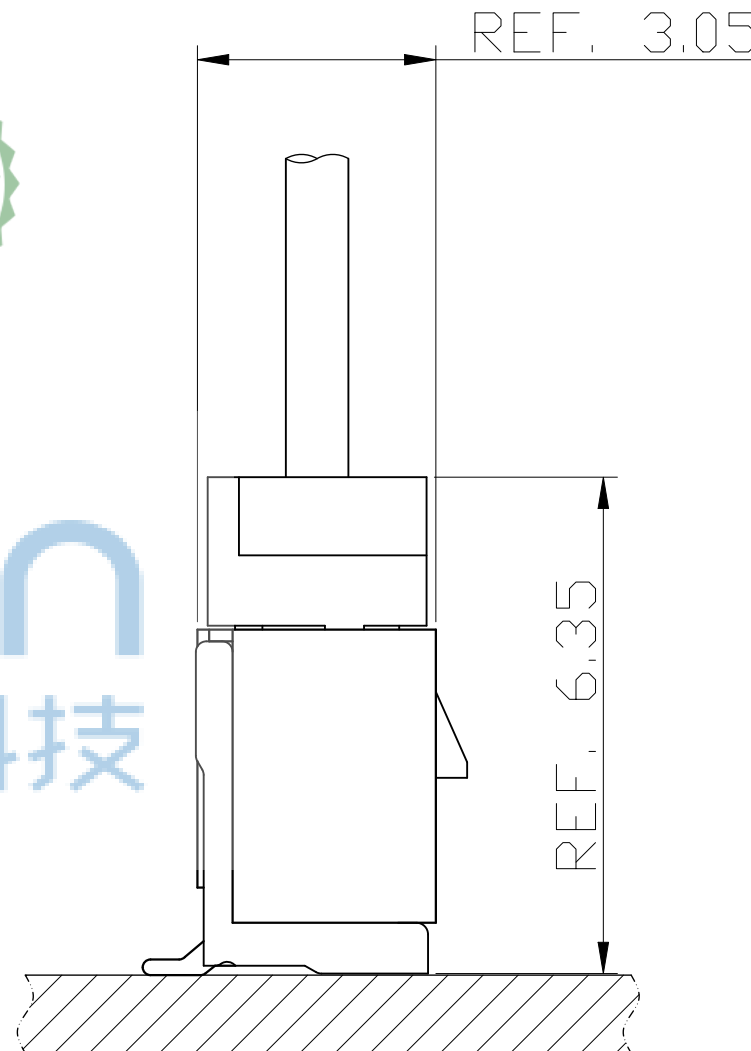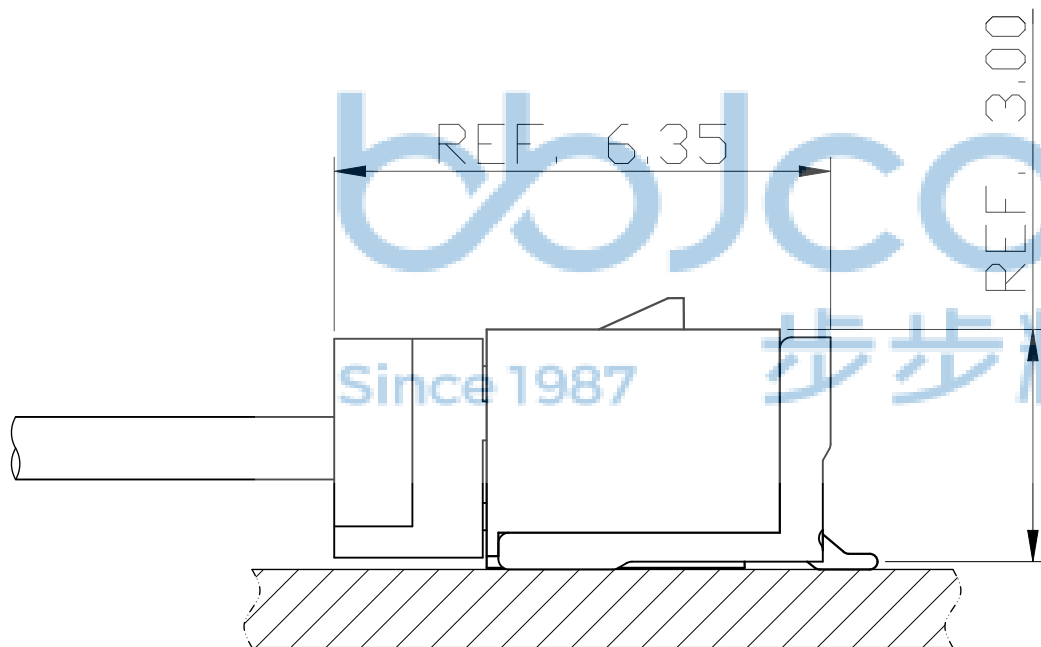

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 针座 1.0-4P 立贴 带扣 加盖 米黄色	
X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$		PJ. NO.: WT.10.63-85-M002	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0510-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3	



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				


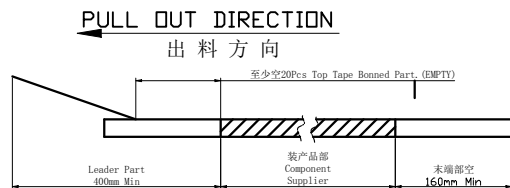


载带带头及带尾尺寸
Lead tape length



PULL OUT DIRECTION
出料方向

剥离方向
Peel Off Direction

载带上下带剥离强度: 0.1N--1.3N(10g-130g)
Peeling off force of top tape: 0.1N--1.3N(10g-130g)

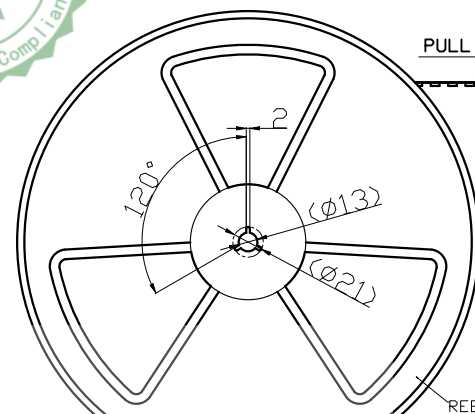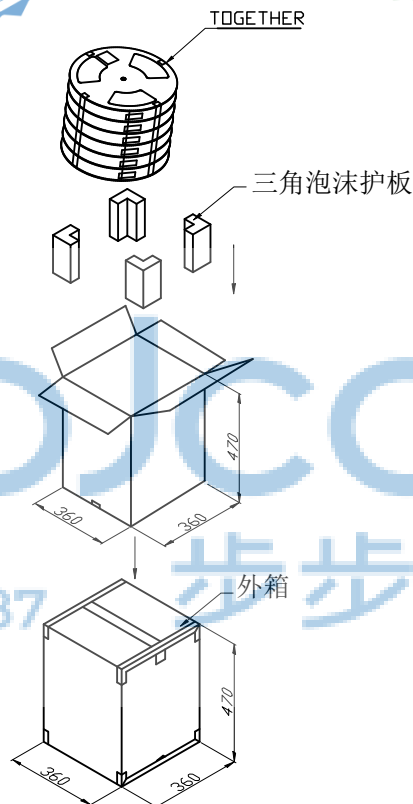


PULL OUT DIRECTION
出料方向

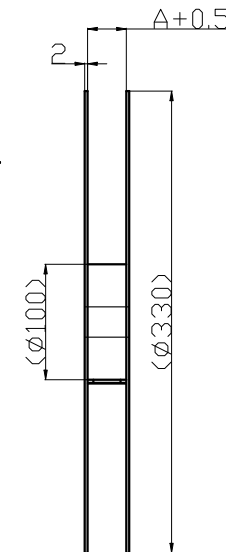


PULL OUT DIRECTION
出料方向

宽度: 16mm/24mm 载带



PULL OUT DIRECTION
出料方向



Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 (Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness: 0.4 ± 0.1 mm.
- 5.Material of top fape: PET, PE, PEF
- 6.Material of carrier fape: Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

芯数 Pin (n)	尺寸 Size
2-6	16.0 7.5
7-14	24.0 11.5
15-16	32.0 14.2 28.4

1. 0WT-nP				
REEL WIDTH	16	24	32	
PCS/REEL	1500			
CTN. SIZE	360*360*470			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.

Corporation AND SHOULD

NOT BE USED IN WHOLE

OR IN PART WITHOUT

PRIOR WRITTEN PERMISSION.

PDWG. NO: 0510-1



.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13
.X': $\pm 3'$.X'': $\pm 2'$.XX': $\pm 1'$

APPD. JM_Zheng

CHKD. LYX

DR. TSP

深圳市步步精科技有限公司

NAME: 针座 1.0-4P 立贴 带扣 加盖 米黄色

PJ. NO.: WT.10.63-85-M002

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3