

Specifications:

Voltage: 30V AC,DC

Current: 0.5A AC,DC

Contact Resistance: $20m\Omega / \max$

Dielectric Withstanding Voltage: 200V AC/rms

Insulation Resistance: $100M\Omega / \min$

Operating Temp.: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$




Pin Material: Phosphor Bronze/Matte Tin-Plated
or Gold-flash or Gold-plated 3u"

Solder Tabs: Phosphor Bronze/Matte Tin-plated
or Gold-flash



Plastic material: LCP UL 94V-0

Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
2	0.80	3.80	1.90	2.38
3	1.60	4.60	2.70	3.18
4	2.40	5.40	3.50	3.98
5	3.20	6.20	4.30	4.78
6	4.00	7.00	5.10	5.58
7	4.80	7.80	5.90	6.38
8	5.60	8.60	6.70	7.18
9	6.40	9.40	7.50	7.98
10	7.20	10.20	8.30	8.78
11	8.00	11.00	9.10	9.58
12	8.80	11.80	9.90	10.38
13	9.60	12.60	10.70	11.18
14	10.40	13.40	11.50	11.98
15	11.20	14.20	12.30	12.78
16	12.00	15.00	13.10	13.58

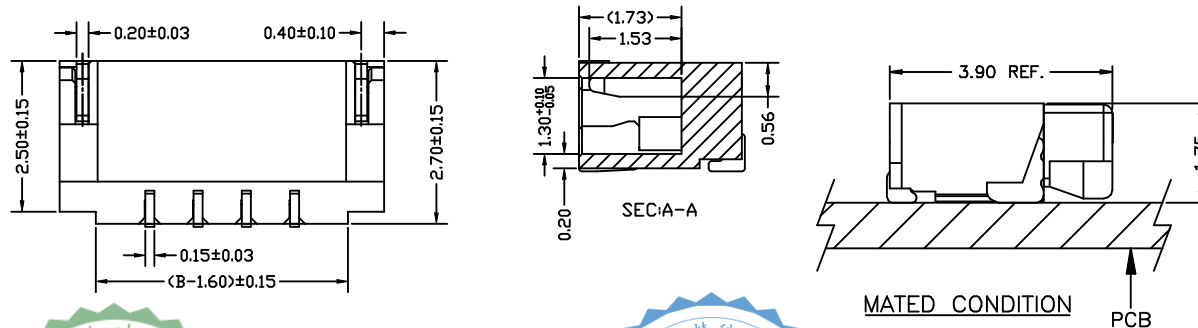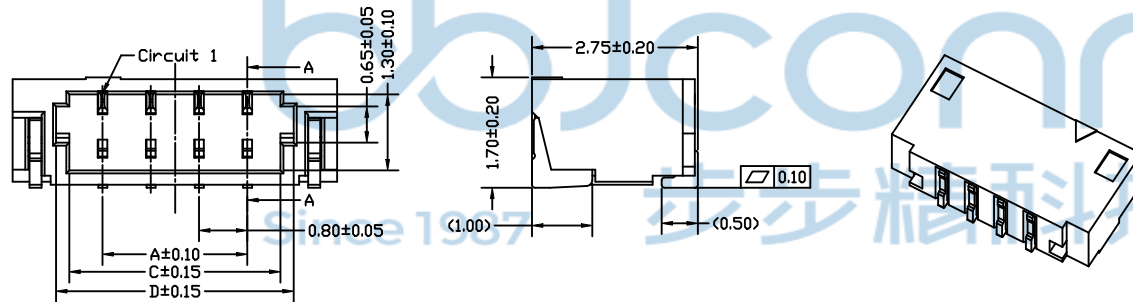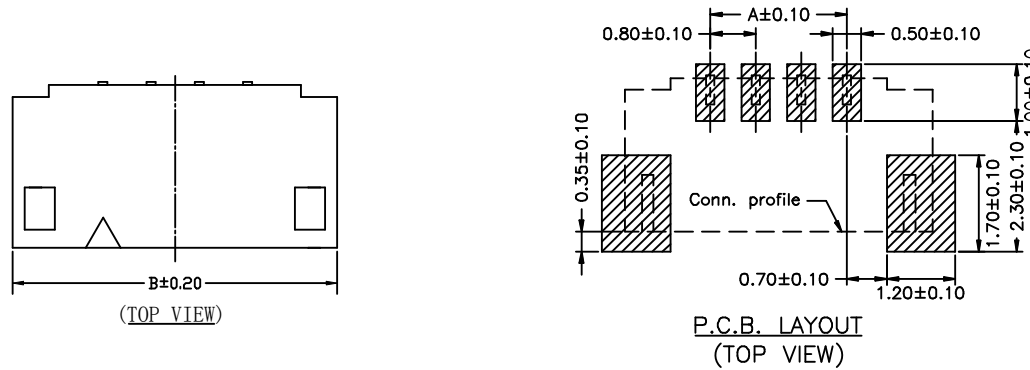

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 针座 0.8-9P 刺破式 卧贴 米黄色 镀金 编带	
APPD.	JM_Zheng	PJ. NO.: 123-231-090001-V3G	
CHKD.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO: 0787-1	DR.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/1

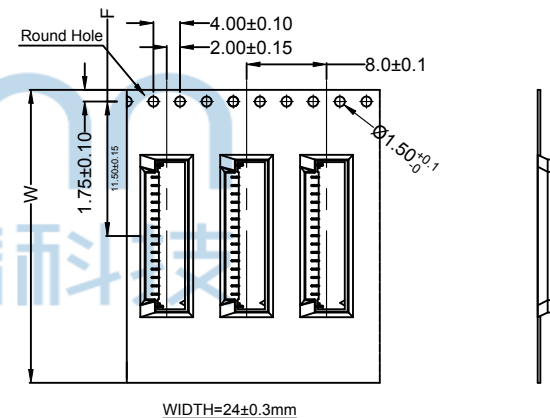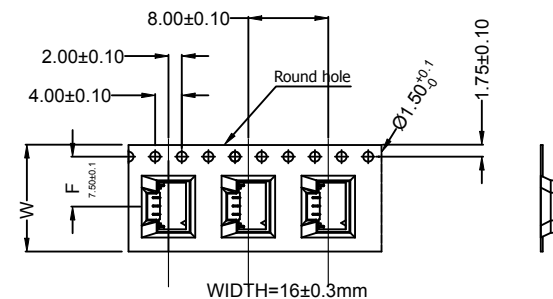

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM ; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
3. Material for PS ; 材质为PS材质; Color颜色: Black黑色
4. bracer保护带: Color颜色: Black黑色; 厚度0.40mm最小
5. Thickness=0.40 ± 0.05 ; 材料厚度为0.40 ± 0.05 mm
6. Cover Tape 上带: 冷封
7. 接触产品的位置材质需要防静电 (包括载带/载盘/上带)
8. Carton material纸箱材质: K=K ; Carton Thickness纸箱厚度: 6~7mm



Carrier Tape No. 載帶料号	W	S	F	T	G	REEL /PCS	CARTON /R
2P	16	/	7.50	20.50	16.50	3500	10R
3P							
4P							
5P							
6P							
7P	24	/	11.50	28.50	24.50	3500	6R
8P							
9P							
10P							
11P							
12P							
13P							
14P							
15P							
16P							



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0787-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$

NAME:	针座 0.8-9P 刺破式 卧贴 米黄色 镀金 编带
-------	----------------------------

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 123-231-090001-V3G
---	-----------------------------

CHKD. TSP

SIZE: A4 | DRW NO.

CHRD.	TSF
-------	-----

FINISH: SEE NOTES	MAT'L : SEE NOTES
-------------------	-------------------

DR.	1 YX
-----	------

| YX

SCALE: N/A	REV: A0	UNIT: mm	PAGE: 2/2
------------	---------	----------	-----------