
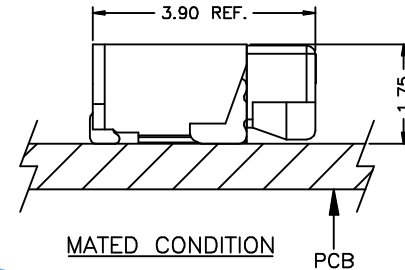

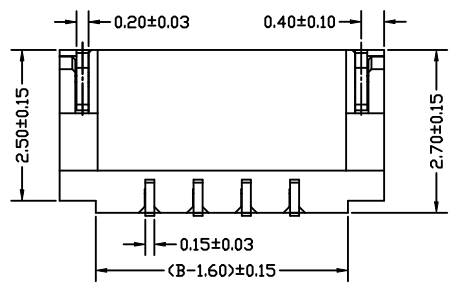


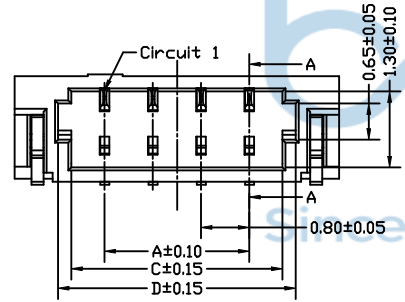


## Specifications:






Voltage: 30V AC,DC  
Current: 0.5A AC,DC  
Contact Resistance:  $20m\Omega / \max$   
Dielectric Withstanding Voltage: 200V AC/rms  
Insulation Resistance:  $100M\Omega / \min$   
Operating Temp.:  $-25^{\circ}C \sim +85^{\circ}C$   
Pin Material: Phosphor Bronze/Matte Tin-Plated or Gold-flash or Gold-plated 3u"  
Solder Tabs: Phosphor Bronze/Matte Tin-plated or Gold-flash  
Plastic material: LCP UL 94V-0

## Ordering Information & Dimensions

| Poles | Dimensions (mm) |       |       |       |
|-------|-----------------|-------|-------|-------|
|       | A               | B     | C     | D     |
| 2     | 0.80            | 3.80  | 1.90  | 2.38  |
| 3     | 1.60            | 4.60  | 2.70  | 3.18  |
| 4     | 2.40            | 5.40  | 3.50  | 3.98  |
| 5     | 3.20            | 6.20  | 4.30  | 4.78  |
| 6     | 4.00            | 7.00  | 5.10  | 5.58  |
| 7     | 4.80            | 7.80  | 5.90  | 6.38  |
| 8     | 5.60            | 8.60  | 6.70  | 7.18  |
| 9     | 6.40            | 9.40  | 7.50  | 7.98  |
| 10    | 7.20            | 10.20 | 8.30  | 8.78  |
| 11    | 8.00            | 11.00 | 9.10  | 9.58  |
| 12    | 8.80            | 11.80 | 9.90  | 10.38 |
| 13    | 9.60            | 12.60 | 10.70 | 11.18 |
| 14    | 10.40           | 13.40 | 11.50 | 11.98 |
| 15    | 11.20           | 14.20 | 12.30 | 12.78 |
| 16    | 12.00           | 15.00 | 13.10 | 13.58 |

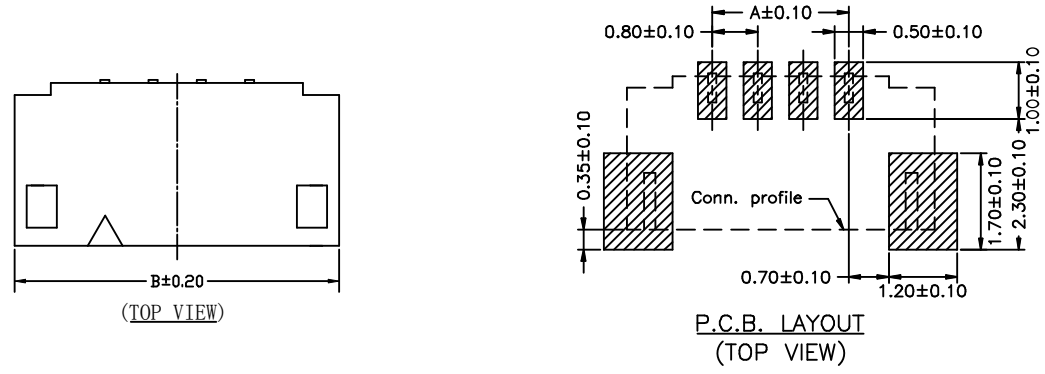

|                                                                                                                                                            |                             |                                     |                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|-----------------------------|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |                             | 深圳市步步精科技有限公司                        |                             |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                     |                             | X*: ±3"<br>.X*: ±2"<br>.XX*: ±1"    |                             |
| NAME:                                                                                                                                                      | 针座 0.8-10P 刺破式 卧贴 米黄色 镀金 编带 |                                     |                             |
| APPD.                                                                                                                                                      | JM_Zheng                    | PJ. NO.: 123-231-100001-V3G         |                             |
| CHKD.                                                                                                                                                      | TSP                         | SIZE: A4 DRW NO.:                   |                             |
| PDWG.NO:                                                                                                                                                   | 0787-1                      | FINISH: SEE NOTES MAT'L.: SEE NOTES |                             |
| DR.                                                                                                                                                        | LYX                         | SCALE: N/A                          | REV.: A0 UNIT: mm PAGE: 1/2 |

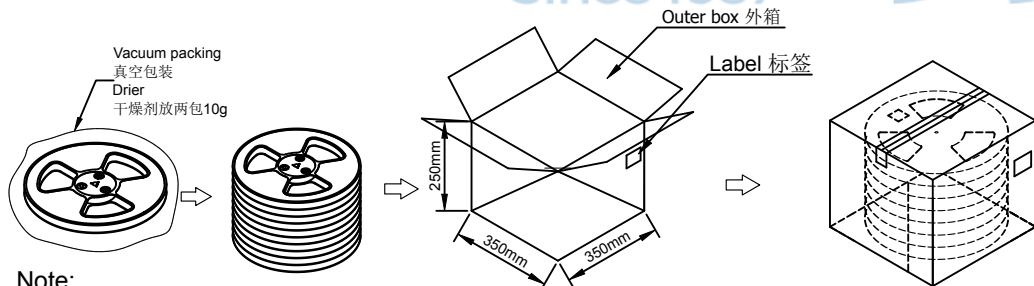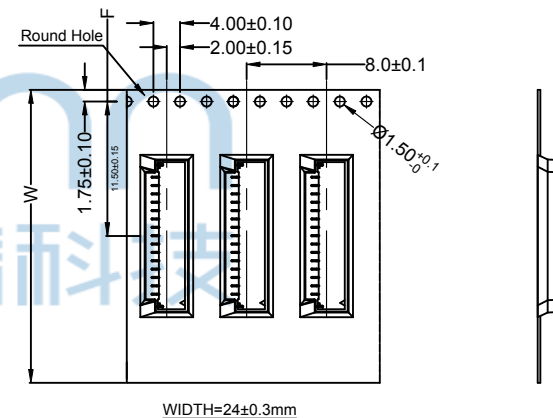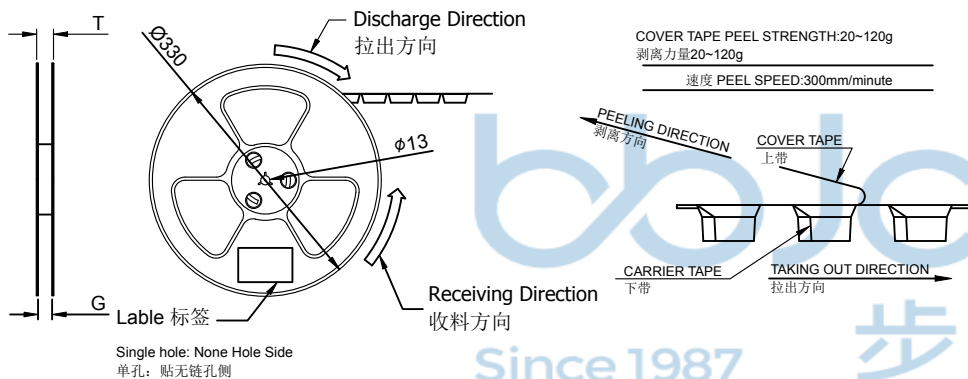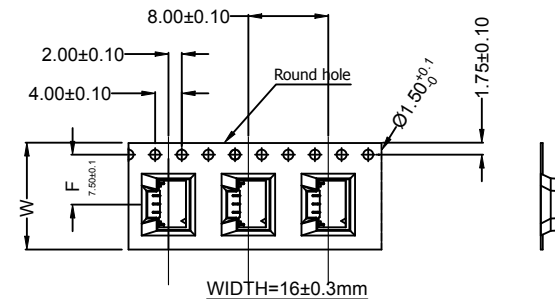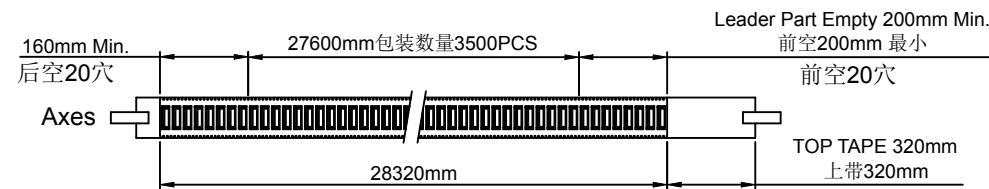

Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
- Material for PS ; 材质为PS材质; Color颜色: Black黑色
- bracer保护带: Color颜色: Black黑色; 厚度0.40mm 最小
- Thickness=0.40±0.05 ; 材料厚度为0.40±0.05mm
- Cover Tape 上带: 冷封
- 接触产品的位置材质需要防静电 (包括载带/载盘/上带)
- Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm



| Carrier Tape No.<br>载带料号 | W  | S | F     | T     | G     | REEL<br>/PCS | CARTON<br>/R |
|--------------------------|----|---|-------|-------|-------|--------------|--------------|
| 2P                       | 16 | / | 7.50  | 20.50 | 16.50 | 3500         | 10R          |
| 3P                       |    |   |       |       |       |              |              |
| 4P                       |    |   |       |       |       |              |              |
| 5P                       |    |   |       |       |       |              |              |
| 6P                       |    |   |       |       |       |              |              |
| 7P                       | 24 | / | 11.50 | 28.50 | 24.50 | 3500         | 6R           |
| 8P                       |    |   |       |       |       |              |              |
| 9P                       |    |   |       |       |       |              |              |
| 10P                      |    |   |       |       |       |              |              |
| 11P                      |    |   |       |       |       |              |              |
| 12P                      |    |   |       |       |       |              |              |
| 13P                      |    |   |       |       |       |              |              |
| 14P                      |    |   |       |       |       |              |              |
| 15P                      |    |   |       |       |       |              |              |
| 16P                      |    |   |       |       |       |              |              |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG. NO: 0787-1

深圳市步步精科技有限公司

NAME: 针座 0.8-10P 刺破式 卧贴 米黄色 镀金 编带

PJ. NO.: 123-231-100001-V3G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2

