






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

Voltage Rating:150V AC/DC
Current Rating:3.0A AC/DC
Withstand Voltage:500V AC/minute
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-25℃ to +85℃
After Enviromental Testing:40MΩ Max
Material:
Contact Material:Phosphor Bronze C5191
Contact Plating:Gold Flash Plating
Insulator Material:PA4T UL94V-0
Solder Tabs Material: Brass C2680
Solder Tabs Plating:Tin Plating



02P~04P Single Hole
SCALE 1:0.7

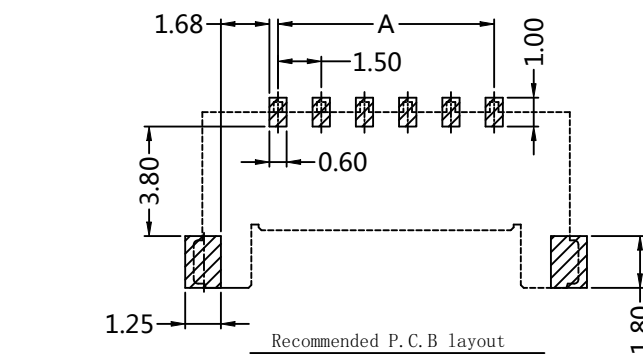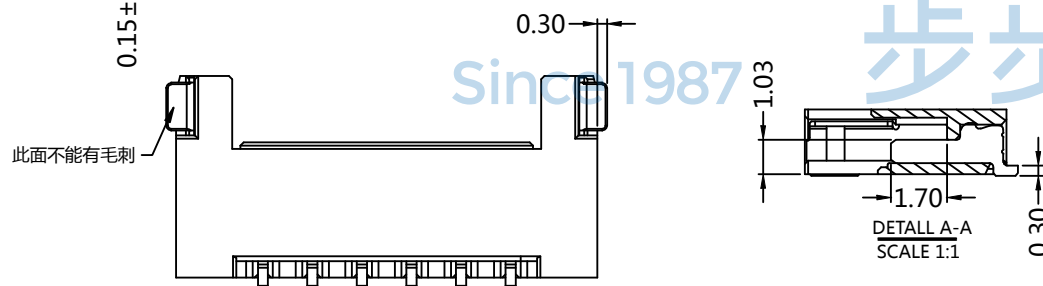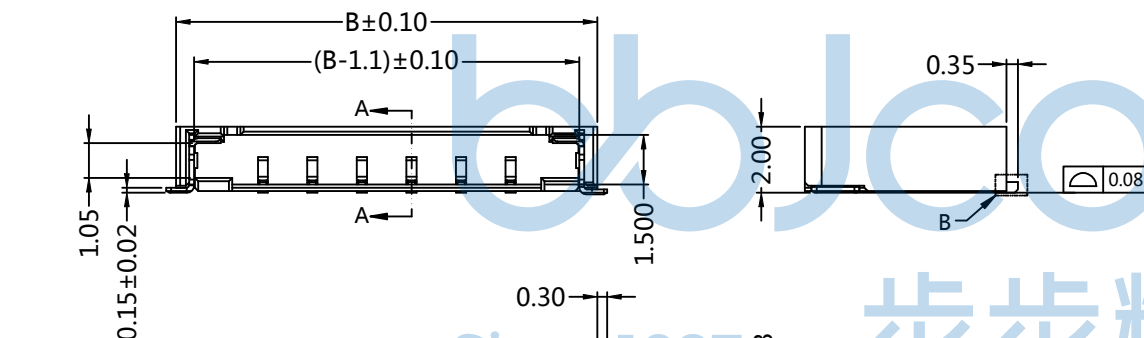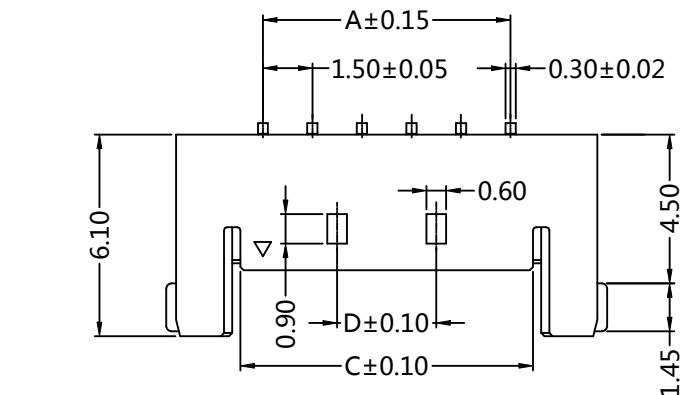

Pins	Dimensions (mm)			
	A	B	C	D
2	1.50	6.75	2.85	
3	3.00	8.25	4.35	
4	4.50	9.75	5.85	
5	6.00	11.25	7.35	3.00
6	7.50	12.75	8.85	3.00
7	9.00	14.25	10.35	4.50
8	10.50	15.75	11.85	6.00
9	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X*: ±3"
.X*: ±2"
.XX*: ±1"

APPD. JM_Zheng
CHKD. LYX
DR. TSP

深圳市步步精科技有限公司

NAME:
针座 Molex 1.5-3P 卧贴 黑色 超薄款 端子镀金G-F





PJ. NO.: 123-261-030001-U7G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

PDWG.NO: 0333-1

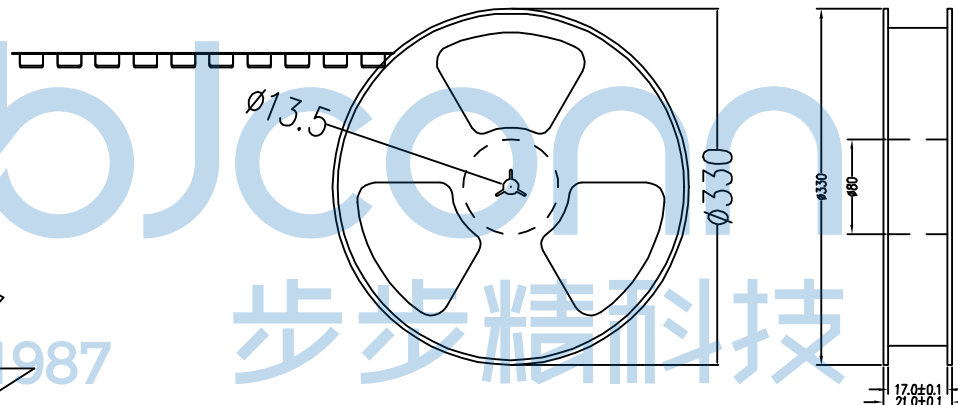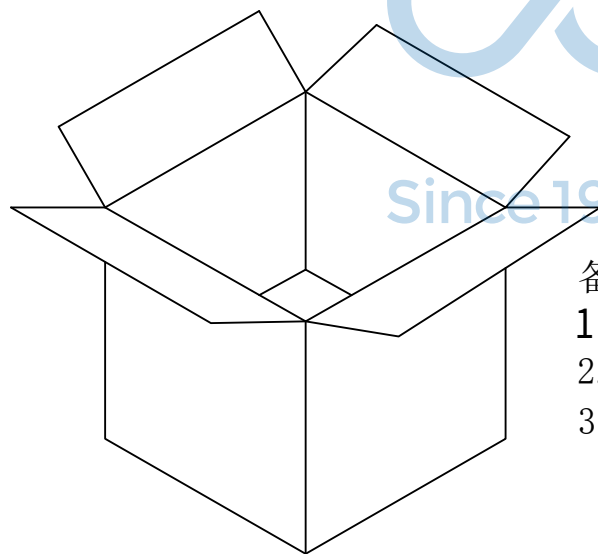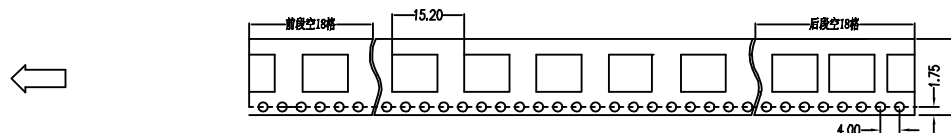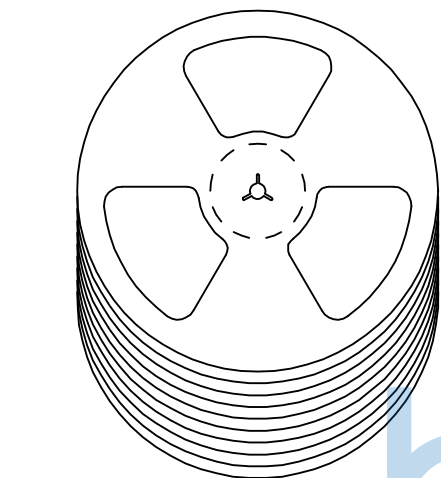

备注:

1. 包装数量: 2000/PCS/卷, 10卷/箱
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 针座 Molex 1.5-3P 卧贴 黑色 超薄款 端子镀金G-F	
APPD. JM_Zheng		PJ. NO.: 123-261-030001-U7G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0333-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	