

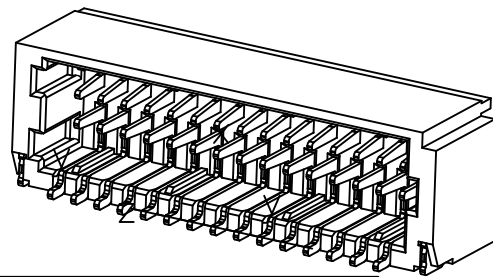


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC。
4. 接触电阻: $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
5. 绝缘电阻: $\geq 100\text{M}\Omega$ 。

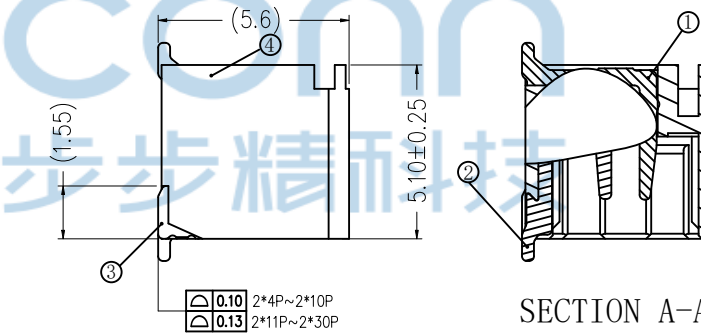

CKT	DIM A	DIM B	DIM C	DIM D
2*4	3.00	4.50	6.30	7.10
2*5	4.00	5.50	7.30	8.10
2*6	5.00	6.50	8.30	9.10
2*8	7.00	8.50	10.30	11.10
2*9	8.00	9.50	11.30	12.10
2*10	9.00	10.50	12.30	13.10
2*12	11.00	12.50	14.30	15.10
2*14	13.00	14.50	16.30	17.10
2*15	14.00	15.50	17.30	18.10
2*20	19.00	20.50	22.30	23.10
2*25	24.00	25.50	27.30	28.10
2*30	29.00	30.50	32.30	33.10

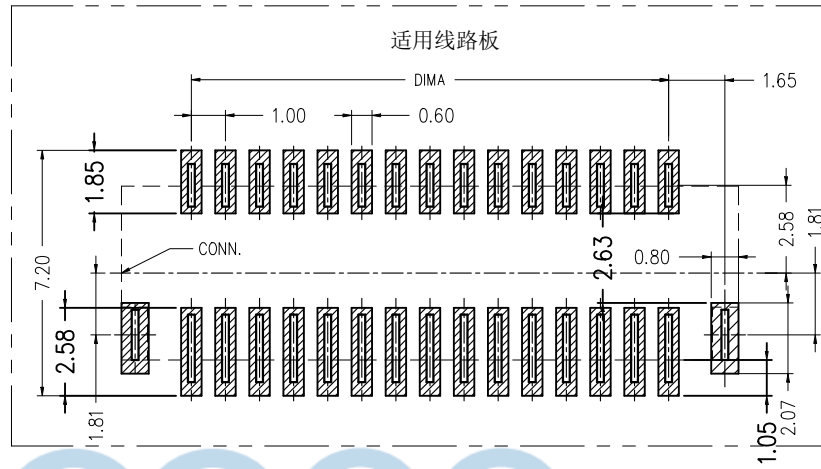

序号	品名	材质
①	1. 0B型双排卧式左 端子	铜合金/表面镀锡
②	1. 0B型双排卧式右 端子	铜合金/表面镀锡
③	1. 0B型双排卧式WTB 焊片	铜合金/表面镀锡
④	1. 0B型双排卧式 胶芯	PA6T UL94V-0米色 LCP UL94V-0本色

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1

深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD Tang




DR LYX











NAME: 针座 SHD 1.0-2x8P B型 双排卧贴1代
无柱 米黄色 加盖编带

PJ NO: 123-241-160001-X3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE: 1/4

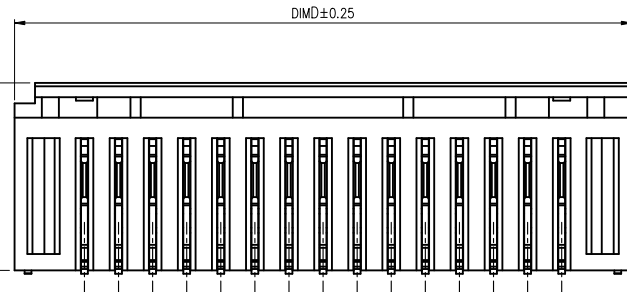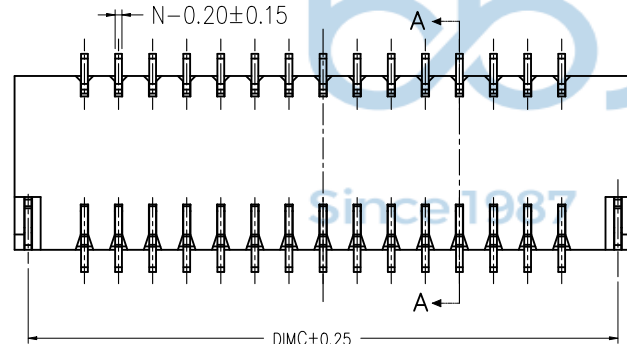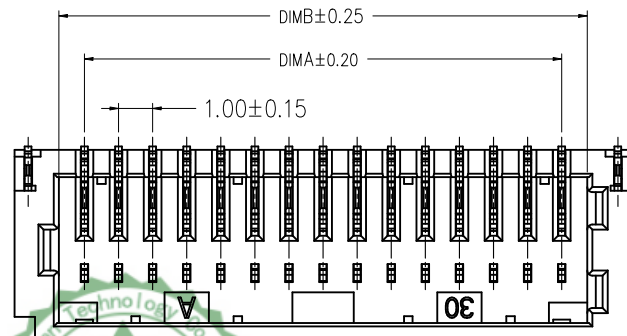

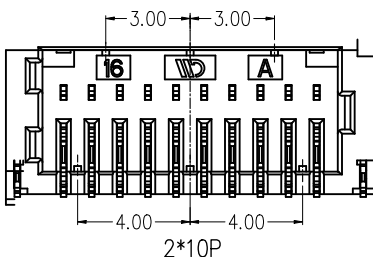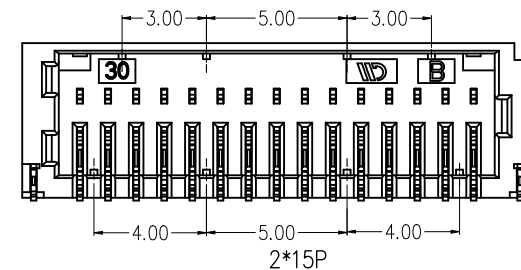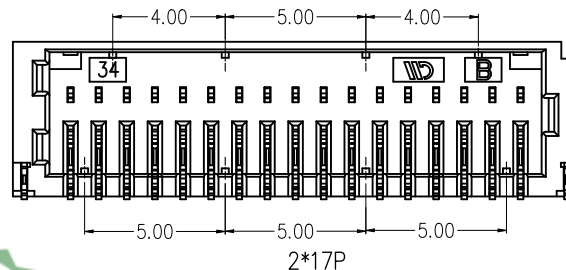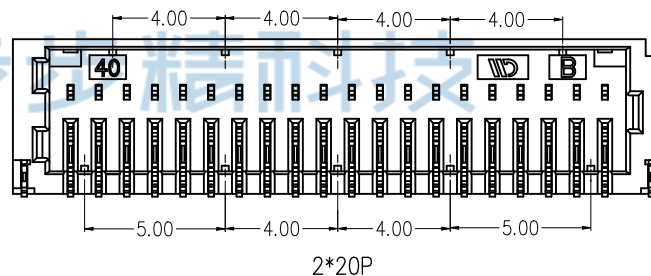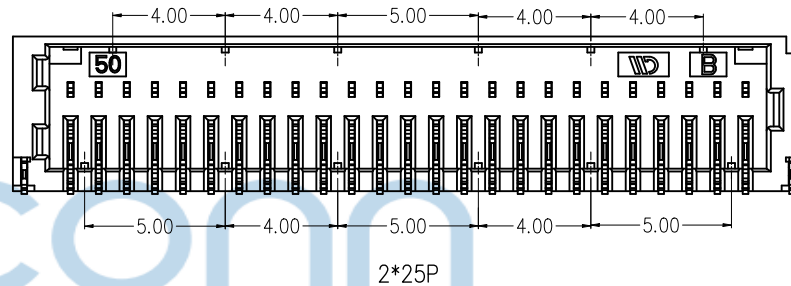
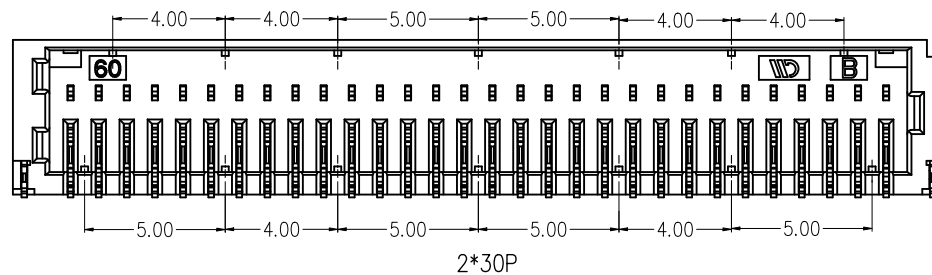



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: 针座 SHD 1.0-2x8P B型 双排卧贴1代 无柱 米黄色 加盖编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		.X': ±3' .X'': ±2' .XX': ±1'		PJ NO: 123-241-160001-X3G SIZE:A4 DRW NO:	
APPD		JM_Zheng		FINISH:SEE NOTES	
CHKD		Tang		MAT'L:SEE NOTES	
PDWG NO:		DR LYX		SCALE:N/A	
				REV:A0	
				UNIT:mm	
				PAGE: 2/4	


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

NOTE(注):


- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明防静电 PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.30 METERS. (每卷包装长度: 12.30米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

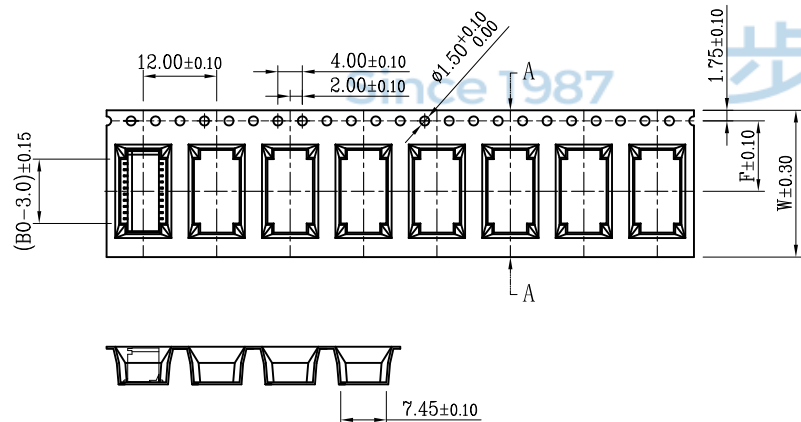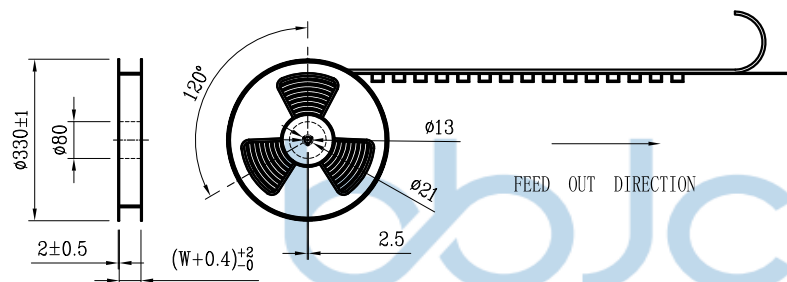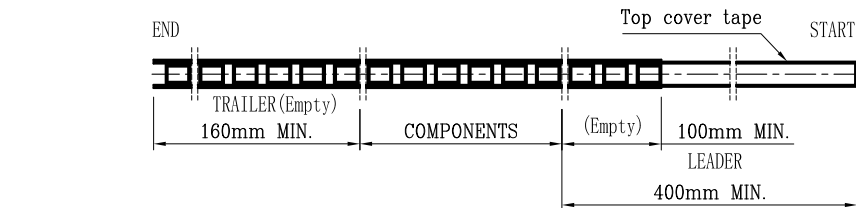

SECTION A-A



纸箱型号	小型	中型	标准型
Carton Type	Small Size	Medium	Standard
高度	7.5	15	32
Hight (CM)			

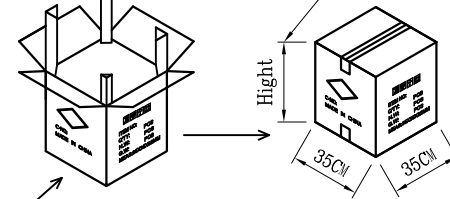

CKT (1.0mm pitch)	B0	W	F
2*4	7.50	16	7.50
2*5	8.50		
2*6	9.50		
2*7	10.50		
2*8	11.50		
2*9	12.50	24	11.50
2*10	13.50		
2*11	14.50		
2*12	15.50		

CKT (1.0mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)
2*4	16	1000	14	14000
2*5		1000	14	14000
2*6		1000	10	10000
2*7		1000	10	10000
2*8		1000	10	10000
2*9	24	1000	10	10000
2*10		1000	10	10000
2*11		1000	10	10000
2*12		1000	10	10000



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$




NAME: 针座 SHD 1.0-2x8P B型 双排卧贴1代
无柱 米黄色 加盖编带

APPD JM_Zheng
CHKD Tang

PJ NO: 123-241-160001-X3G
SIZE:A4 DRW NO:

PDWG NO: DR LYX

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:3/4

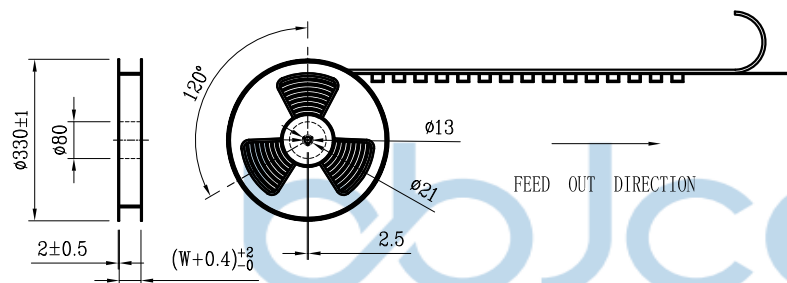

A diagram of a cube-shaped box. The front face is labeled '35CM' and the side face is labeled '35CM'. The height is indicated by a vertical arrow on the left labeled 'Height'. The box has a top flap and a bottom flap, both labeled '35CM'.

	.X:
	.XX:
	.XXX:

SCALE:N/A	REV:A0	UNIT:mm	PAGE:4/4
-----------	--------	---------	----------