

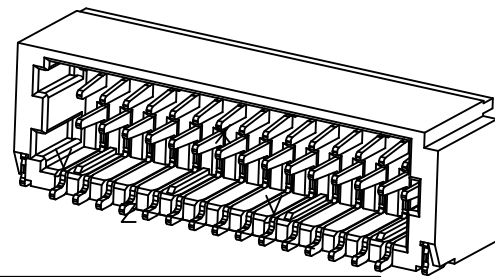


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC。
4. 接触电阻: $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
5. 绝缘电阻: $\geq 100\text{M}\Omega$ 。

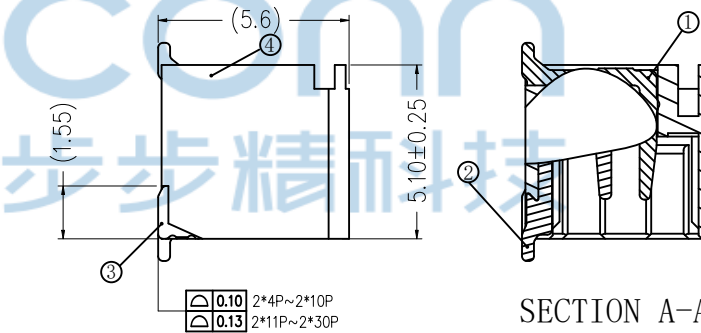

CKT	DIM A	DIM B	DIM C	DIM D
2*4	3.00	4.50	6.30	7.10
2*5	4.00	5.50	7.30	8.10
2*6	5.00	6.50	8.30	9.10
2*8	7.00	8.50	10.30	11.10
2*9	8.00	9.50	11.30	12.10
2*10	9.00	10.50	12.30	13.10
2*12	11.00	12.50	14.30	15.10
2*14	13.00	14.50	16.30	17.10
2*15	14.00	15.50	17.30	18.10
2*20	19.00	20.50	22.30	23.10
2*25	24.00	25.50	27.30	28.10
2*30	29.00	30.50	32.30	33.10

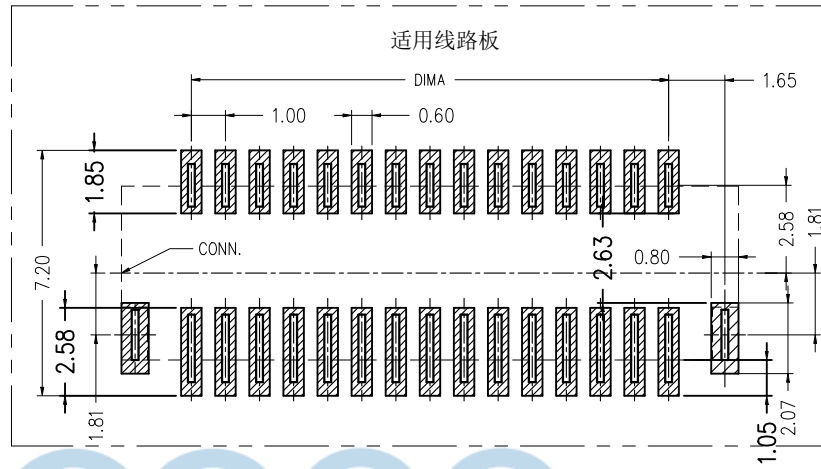

序号	品名	材质
①	1. 0B型双排卧式左 端子	铜合金/表面镀锡
②	1. 0B型双排卧式右 端子	铜合金/表面镀锡
③	1. 0B型双排卧式WTB 焊片	铜合金/表面镀锡
④	1. 0B型双排卧式 胶芯	PA6T UL94V-0米色 LCP UL94V-0本色

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1



深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME: 针座 SHD 1.0-2x20P B型 双排卧贴1代
无柱 米黄色 加盖编带

APPD JM_Zheng




PJ NO: 123-241-400001-X3G











CHKD Tang

SIZE: A4 DRW NO:






DR LYX

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 1/4

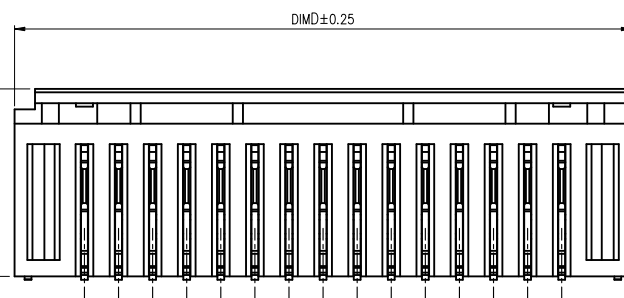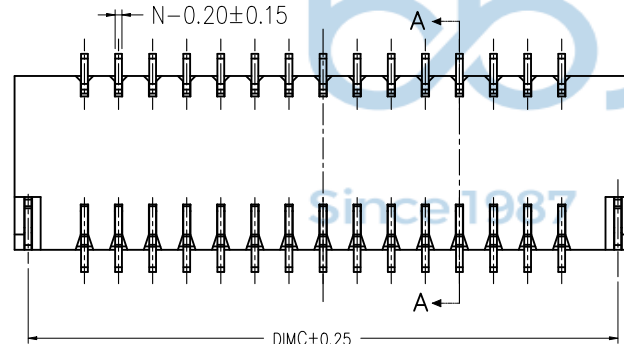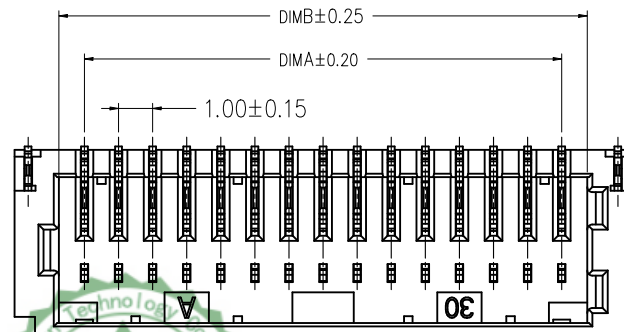

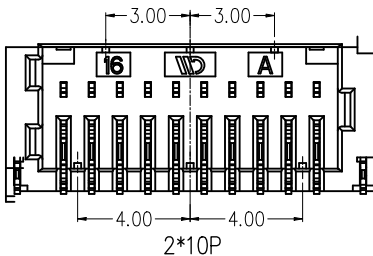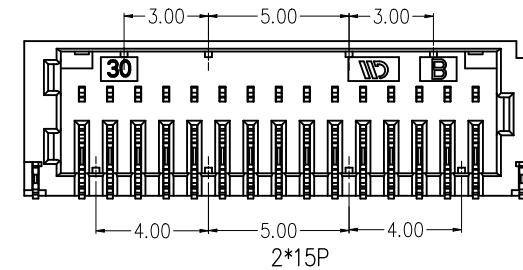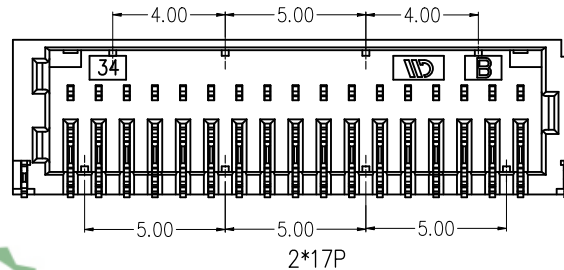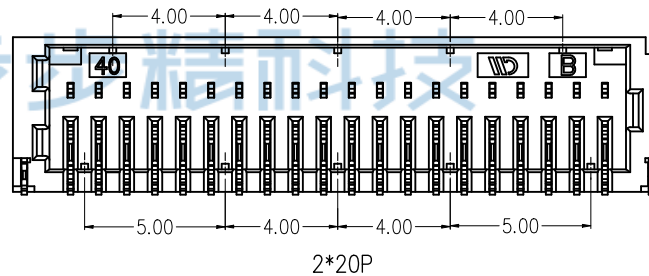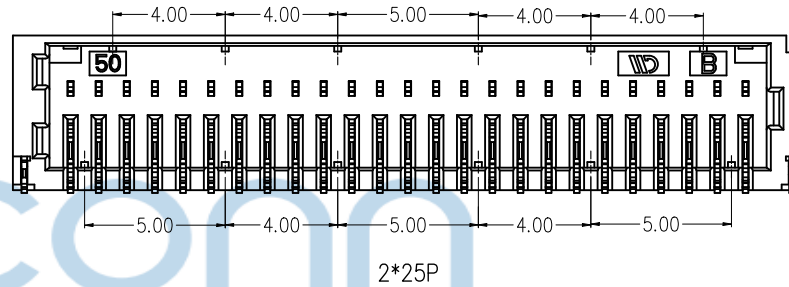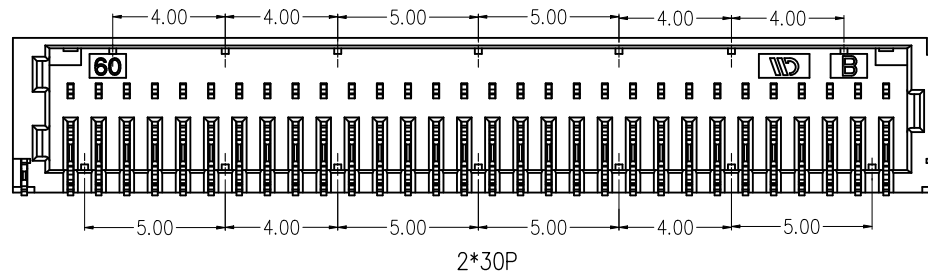

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' .XX': ±1'	
APPD	JM_Zheng	NAME: 针座 SHD 1.0-2x20P B型 双排卧贴1代 无柱 米黄色 加盖编带	
CHKD	Tang	PJ NO: 123-241-400001-X3G	
PDWG NO:	DR LYX	SIZE: A4	
		FINISH: SEE NOTES	
		SCALE: N/A	
		REV: A0	
		UNIT: mm	
		PAGE: 2/4	

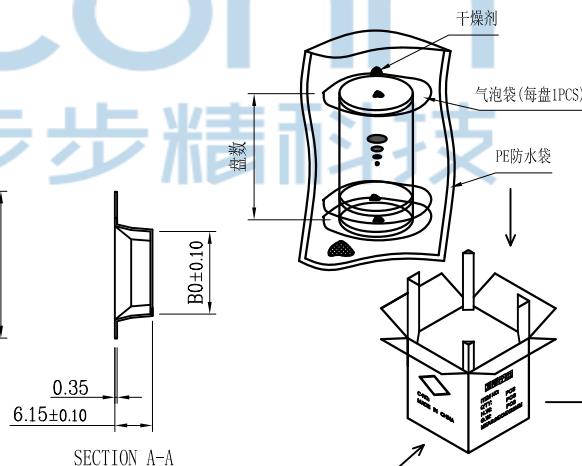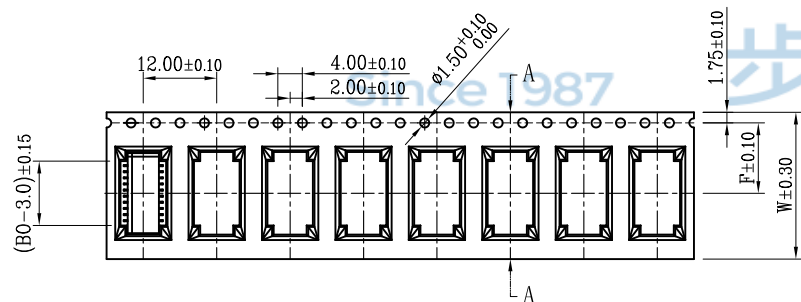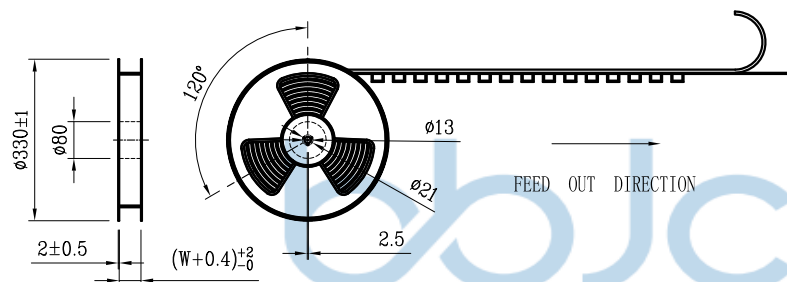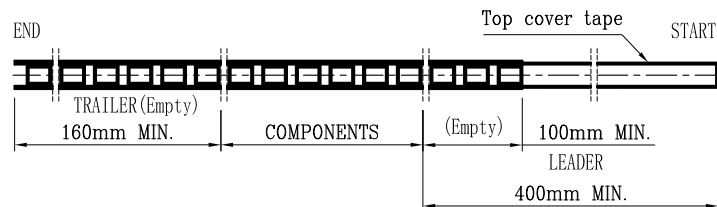

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32



CKT (1.0mm pitch)	B0	W	F
2*4	7.50	16	7.50
2*5	8.50		
2*6	9.50	24	11.50
2*7	10.50		
2*8	11.50		
2*9	12.50		
2*10	13.50		
2*11	14.50		
2*12	15.50		

CKT (1.0mm pitch)	W	PCS/RELL	RELL/CARTON	SUM (PCS)
2*4	16	1000	14	14000
2*5		1000	14	14000
2*6		1000	10	10000
2*7	24	1000	10	10000
2*8		1000	10	10000
2*9		1000	10	10000
2*10		1000	10	10000
2*11		1000	10	10000
2*12		1000	10	10000



NOTE (注) :

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明抗静电 PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.30 METERS. (每卷包装长度: 12.30米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:



	.X:
	.XX:
	.XXX:

APPD

CHKD

DR

深圳市步步精科技有限公司

± 0.38	$X^*: \pm 3^*$
± 0.25	$X^*: \pm 2^*$
± 0.13	$XX^*: \pm 1^*$

JM_Zheng

	Tang
--	------





LYX	
-----	--

NAME:针座 SHD 1.0-2x20P B型 双排卧贴1代 无柱 米黄色 加盖编带
--

	PJ NO: 123-241-400001-X3G
---	---------------------------

SIZE: A4	DRW NO:
FINISH OFF NOTES	DATA OFF NOTES




FINISH:SEE NOTES		MAT E:SEE NOTES	
SCALE:N/A	REV:AO	UNIT:mm	PAGE:3/4

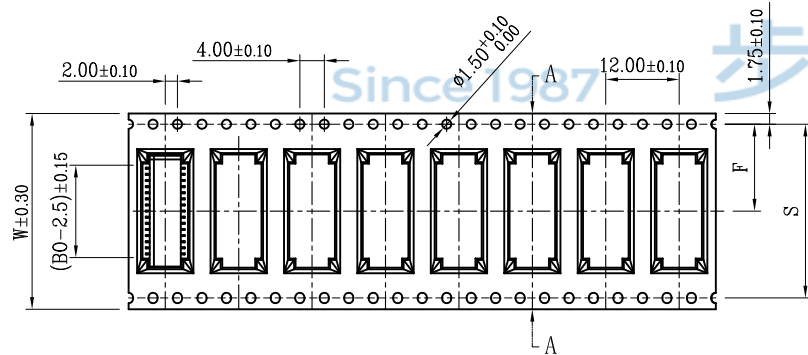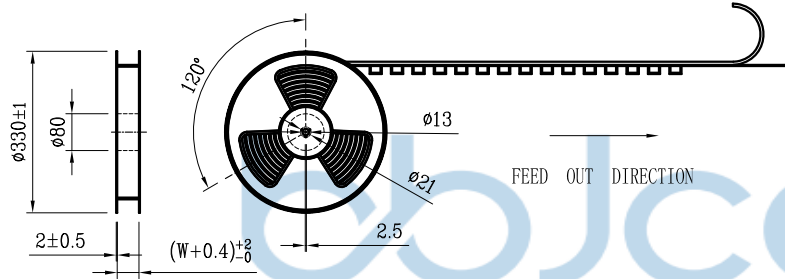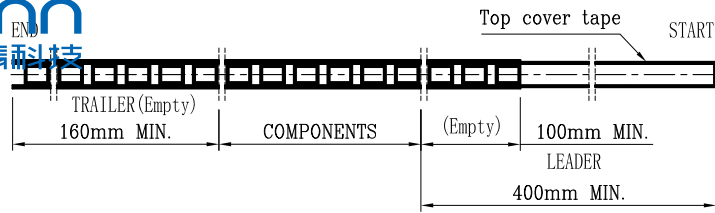

CKT (1.0mm pitch)	W	PCS/REEL	REEL/CARTON	SUM(PCS)
2*13	32	1000	8	8000
2*14		1000	8	8000
2*15		1000	8	8000
2*16		1000	8	8000
2*17		1000	8	8000
2*18	44	1000	6	6000
2*19		1000	6	6000
2*20		1000	6	6000
2*21		1000	6	6000
2*22		1000	6	6000
2*23		1000	6	6000
2*24		1000	6	6000
2*25		1000	6	6000



SECTION A-A

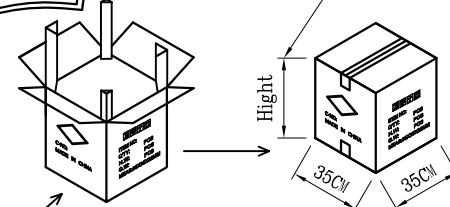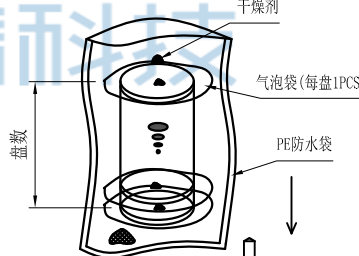

NOTE(注):

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$. (10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm. (载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS. (所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING. (载带材料: 透明抗静电 PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.30 METERS. (每卷包装长度: 12.30米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32



CKT (1.0mm pitch)	B0	W	F	S
2*13	16.50	32	14.2 ± 0.15	28.40
2*14	17.50			
2*15	18.50			
2*16	19.50			
2*17	20.50			
2*18	21.50	44	20.2 ± 0.15	40.40
2*19	22.50			
2*20	23.50			
2*21	24.50			
2*22	25.50			
2*23	26.50			
2*24	27.50			
2*25	28.50			

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.

PDWG NO: DR LYX

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3'$ X': $\pm 2'$.XX': $\pm 1'$

NAME: 针座 SHD 1.0-2x20P B型 双排卧贴1代 无柱 米黄色 加盖编带

PJ NO: 123-241-400001-X3G

SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 4/4