

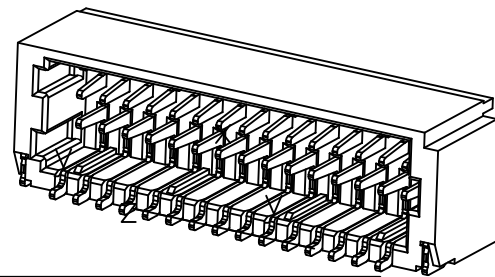


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC。
4. 接触电阻: $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
5. 绝缘电阻: $\geq 100\text{M}\Omega$ 。

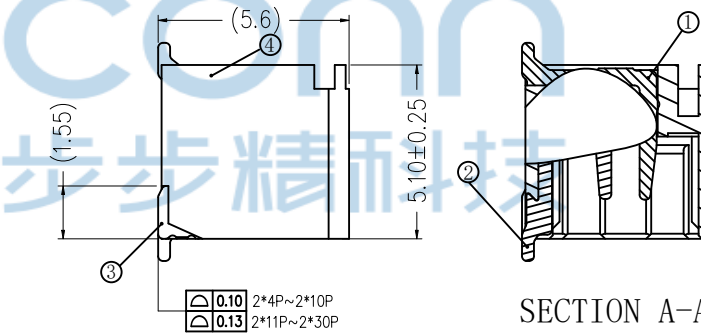

CKT	DIM A	DIM B	DIM C	DIM D
2*4	3.00	4.50	6.30	7.10
2*5	4.00	5.50	7.30	8.10
2*6	5.00	6.50	8.30	9.10
2*8	7.00	8.50	10.30	11.10
2*9	8.00	9.50	11.30	12.10
2*10	9.00	10.50	12.30	13.10
2*12	11.00	12.50	14.30	15.10
2*14	13.00	14.50	16.30	17.10
2*15	14.00	15.50	17.30	18.10
2*20	19.00	20.50	22.30	23.10
2*25	24.00	25.50	27.30	28.10
2*30	29.00	30.50	32.30	33.10

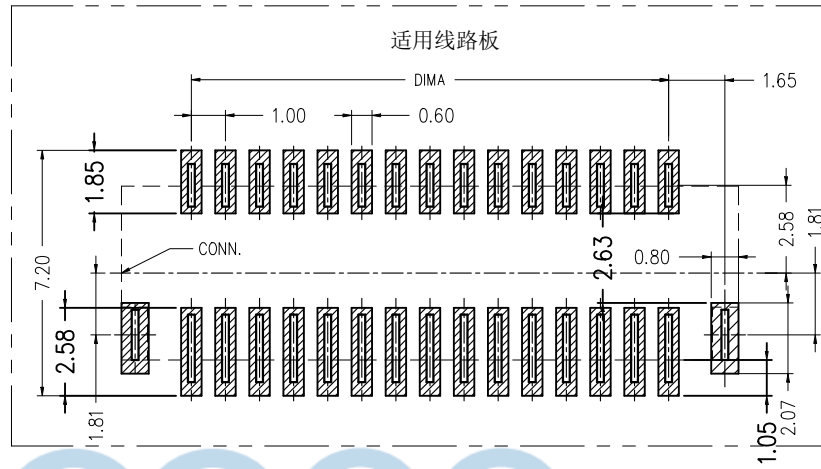

序号	品名	材质
①	1. 0B型双排卧式左 端子	铜合金/表面镀锡
②	1. 0B型双排卧式右 端子	铜合金/表面镀锡
③	1. 0B型双排卧式WTB 焊片	铜合金/表面镀锡
④	1. 0B型双排卧式 胶芯	PA6T UL94V-0米色 LCP UL94V-0本色

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1



深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME: 针座 SHD 1.0-2x25P B型 双排卧式1代
无柱 米黄色 加盖编带

APPD JM_Zheng

PJ NO: 123-241-500001-X3G





CHKD Tang











SIZE: A4 DRW NO:

DR LYX

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 1/4

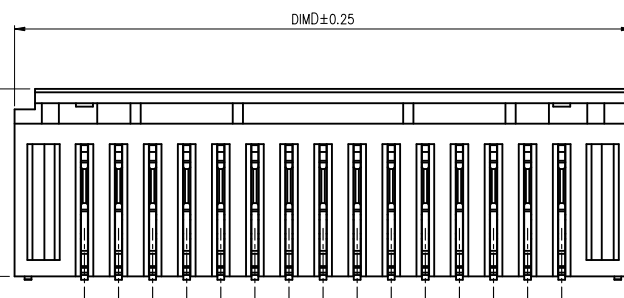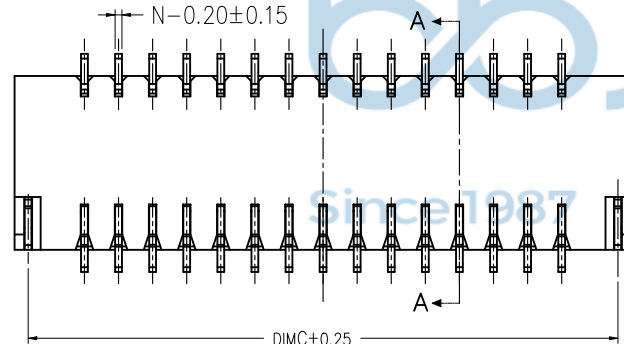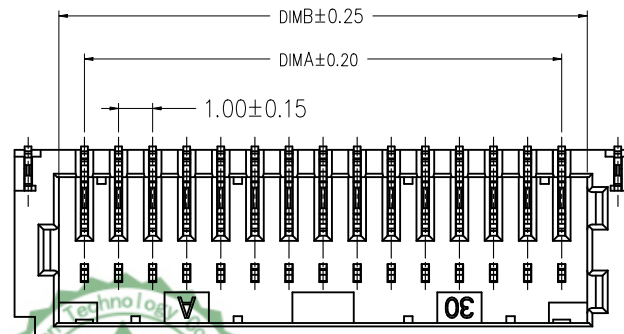

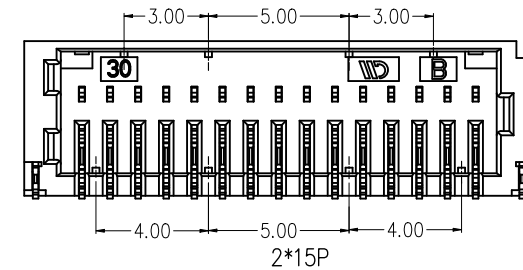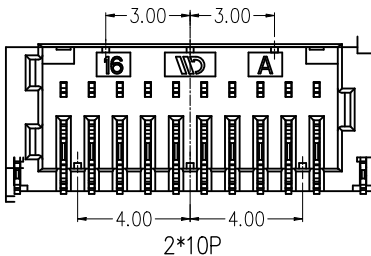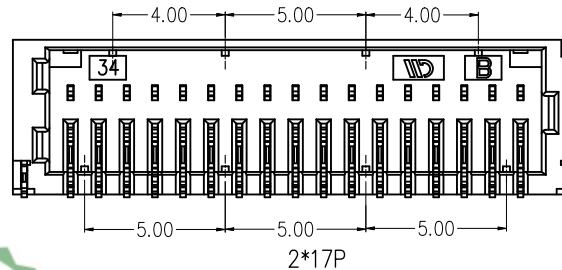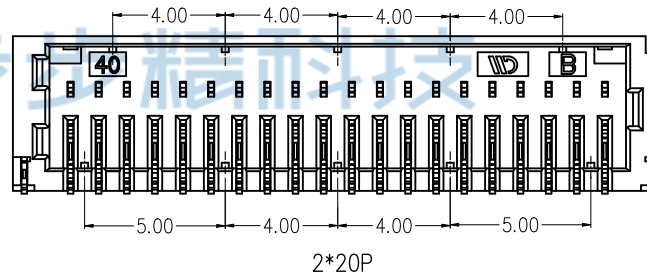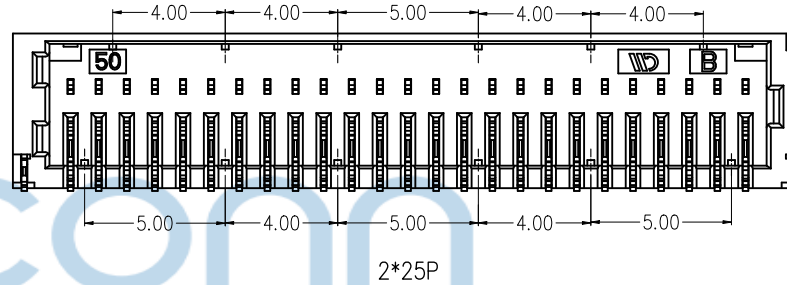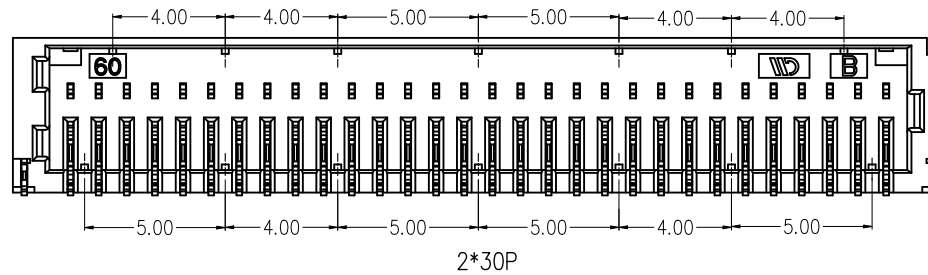

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X'': ±2'
.XXX: ±0.13 .X'': ±1'

NAME: 针座 SHD 1.0-2x25P B型 双排卧贴1代
无柱 米黄色 加盖编带

APPD JM_Zheng

PJ NO: 123-241-500001-X3G




CHKD Tang

SIZE: A4 DRW NO:

PDWG NO: DR LYX

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 2/4

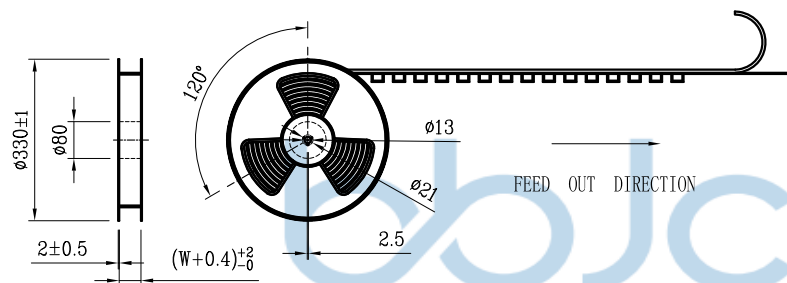

9. 纸箱装小、中、标准型3种规格型号：装箱为整箱(左下包装量)采用标准型纸箱包装，未达到整箱数量以产品量适当采用小型或中型纸箱包装。







A diagram of a cube-shaped box. The front face is a square with side length 35cm. The depth of the box is also labeled as 35cm. The height of the box is labeled as 'Hight'. The box is shown in a 3D perspective view.

 深圳市步步精科技有限公司

NAME:针座 SHD 1.0-2x25P B型 双排卧贴1代
无柱 米黄色 加盖编带

	PJ NO: 123-241-500001-X3G	
	SIZE:A4	DRW NO:




FINISH:SEE NOTES		MAT'L:SEE NOTES	
SCALE:N/A	REV:A0	UNIT:mm	PAGE:3/4

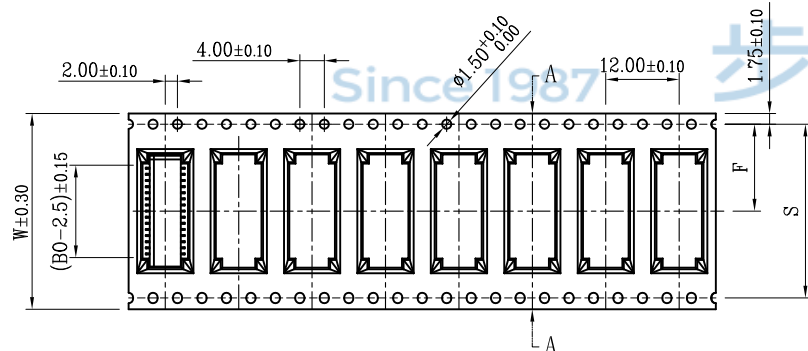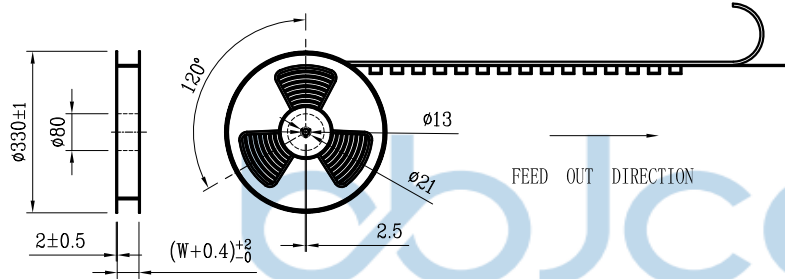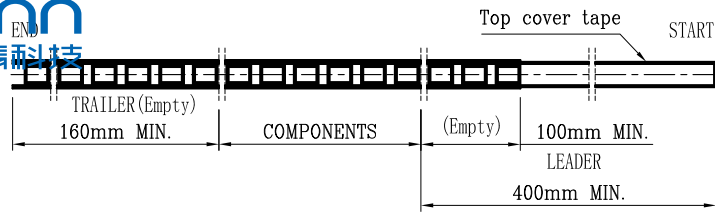


CKT (1.0mm pitch)	W	PCS/REEL	REEL/CARTON	SUM(PCS)
2*13	32	1000	8	8000
2*14		1000	8	8000
2*15		1000	8	8000
2*16		1000	8	8000
2*17		1000	8	8000
2*18		1000	6	6000
2*19	44	1000	6	6000
2*20		1000	6	6000
2*21		1000	6	6000
2*22		1000	6	6000
2*23		1000	6	6000
2*24		1000	6	6000
2*25		1000	6	6000



SECTION A-A

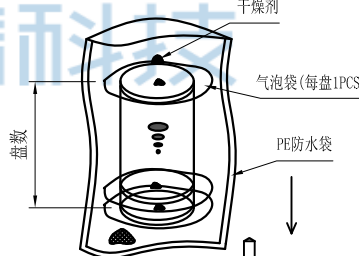

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32



CKT (1.0mm pitch)	B0	W	F	S
2*13	16.50	32	14.2±0.15	28.40
2*14	17.50			
2*15	18.50			
2*16	19.50			
2*17	20.50			
2*18	21.50			
2*19	22.50	44	20.2±0.15	40.40
2*20	23.50			
2*21	24.50			
2*22	25.50			
2*23	26.50			
2*24	27.50			
2*25	28.50			

NOTE(注):

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明抗静电 PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.30 METERS. (每卷包装长度: 12.30米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及聚乙烯填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO:

深圳市步步精科技有限公司

NAME: 针座 SHD 1.0-2x25P B型 双排卧贴1代 无柱 米黄色 加盖编带

PJ NO: 123-241-500001-X3G

SIZE: A4 | DRW NO:

FINISH: SEE NOTES | MAT'L: SEE NOTES

SCALE: N/A | REV: A0 | UNIT: mm | PAGE: 4/4

APPD: JM_Zheng

CHKD: Tang

DR: LYX