


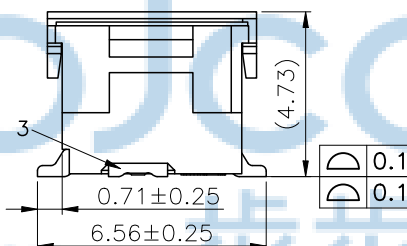




技术参数：

- 1.额定电流：1.0A DC/AC.
- 2.额定电压：50V DC/AC.
- 3.耐电压：500V AC/minute.
- 4.接触电阻：20mΩ Max.
- 5.绝缘电阻：100MΩ Min.
- 6.工作温度：-25 ~+85

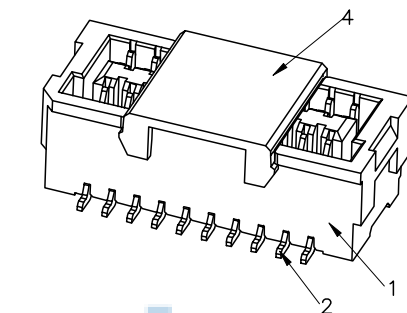

2\*2P结构样式

2\*3P结构样式



2\*4P结构样式

2\*5P结构样式





| CKT  | DIM A | DIM B | DIM C | DIM D | DIM E |
|------|-------|-------|-------|-------|-------|
| 2*2  | 1.00  | 3.60  | 2.00  | 3.42  | 5.00  |
| 2*3  | 2.00  | 4.60  | 3.00  | 4.42  | 6.00  |
| 2*4  | 3.00  | 5.60  | 4.00  | 5.42  | 7.00  |
| 2*5  | 4.00  | 6.60  | 5.00  | 6.42  | 8.00  |
| 2*6  | 5.00  | 7.60  | 6.00  | 7.42  | 9.00  |
| 2*7  | 6.00  | 8.60  | 7.00  | 8.42  | 10.00 |
| 2*8  | 7.00  | 9.60  | 8.00  | 9.42  | 11.00 |
| 2*9  | 8.00  | 10.60 | 9.00  | 10.42 | 12.00 |
| 2*10 | 9.00  | 11.60 | 10.00 | 11.42 | 13.00 |
| 2*11 | 10.00 | 12.60 | 11.00 | 12.42 | 14.00 |
| 2*12 | 11.00 | 13.60 | 12.00 | 13.42 | 15.00 |
| 2*13 | 12.00 | 14.60 | 13.00 | 14.42 | 16.00 |
| 2*14 | 13.00 | 15.60 | 14.00 | 15.42 | 17.00 |
| 2*15 | 14.00 | 16.60 | 15.00 | 16.42 | 18.00 |
| 2*16 | 15.00 | 17.60 | 16.00 | 17.42 | 19.00 |
| 2*17 | 16.00 | 18.60 | 17.00 | 18.42 | 20.00 |
| 2*18 | 17.00 | 19.60 | 18.00 | 19.42 | 21.00 |
| 2*19 | 18.00 | 20.60 | 19.00 | 20.42 | 22.00 |
| 2*20 | 19.00 | 21.60 | 20.00 | 21.42 | 23.00 |
| 2*21 | 20.00 | 22.60 | 21.00 | 22.42 | 24.00 |
| 2*22 | 21.00 | 23.60 | 22.00 | 23.42 | 25.00 |
| 2*23 | 22.00 | 24.60 | 23.00 | 24.42 | 26.00 |
| 2*24 | 23.00 | 25.60 | 24.00 | 25.42 | 27.00 |
| 2*25 | 24.00 | 26.60 | 25.00 | 26.42 | 28.00 |

| 序号 | 产品名称 | 材料规格 | 表面处理/颜色 | 数量 |
|----|------|------|---------|----|
| 1  | 胶芯   | LCP  | 本色      | 1  |
| 2  | 端子   | 铜合金  | 镀金/镀镍   | /  |
| 3  | 焊片   | 铜合金  | 镀锡/镀镍   | 2  |
| 4  | 吸取盖  | LCP  | 黑色      | 1  |

|                                                                                                                                                                              |                                                                                       |                                                                             |     |                                                                                       |                           |         |                 |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------|---------------------------|---------|-----------------|-----------|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>PRIOR WRITTEN PERMISSION.<br><br>PDWG NO:0456—1 |  | 深圳市步步精科技有限公司                                                                |     |                                                                                       |                           |         |                 |           |
|                                                                                                                                                                              |                                                                                       | .X: ±0.38    .X': ±3"<br>.XX: ±0.25    .X': ±2"<br>.XXX: ±0.13    .XX': ±1" |     | NAME: 针座 SHLD1.0-2x9P B型 双排 立贴<br>带扣 4代 无柱 米黄色 加盖绑带                                   |                           |         |                 |           |
|                                                                                                                                                                              | APPD                                                                                  | JM_Zheng                                                                    |     |  | PJ NO: 123-244-180004-X3G |         |                 |           |
|                                                                                                                                                                              | CHKD                                                                                  | LYX                                                                         |     |                                                                                       | SIZE:A4                   | DRW NO: |                 |           |
|                                                                                                                                                                              |                                                                                       | DR                                                                          | LYL |                                                                                       | FINISH:SEE NOTES          |         | MAT'L:SEE NOTES |           |
|                                                                                                                                                                              |                                                                                       |                                                                             |     | SCALE:N/A                                                                             |                           | REV:A0  | UNIT:mm         | PAGE: 1/3 |

NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ .  
(10片孔距累积公差 $\pm 0.2\text{mm}$ .)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.  
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.  
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.  
(载带材料: 透明抗静电 PS.)
5. THICKNESS:  $0.35 \pm 0.05\text{mm}$ . (载带厚度:  $0.35 \pm 0.05\text{mm}$ .)
6. PACKING LENGHT PER REEL: 12.48 METERS. (每卷包装长度: 12.48米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

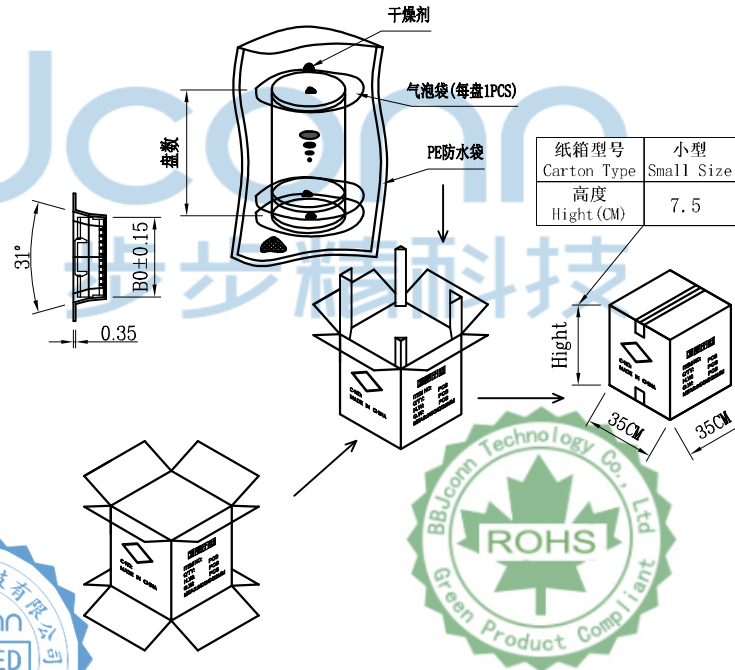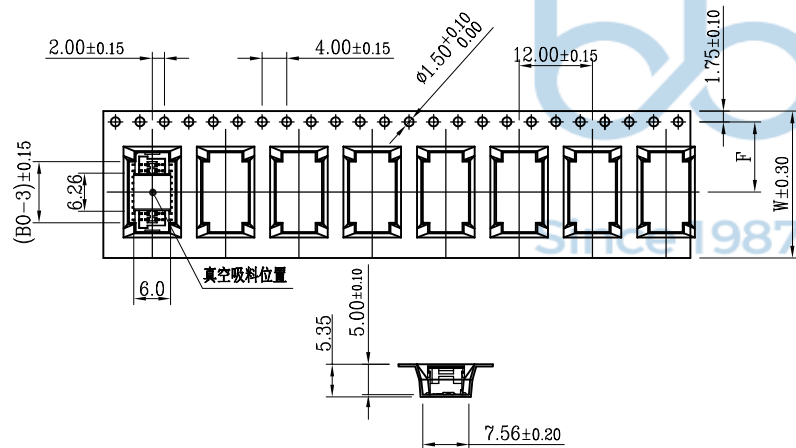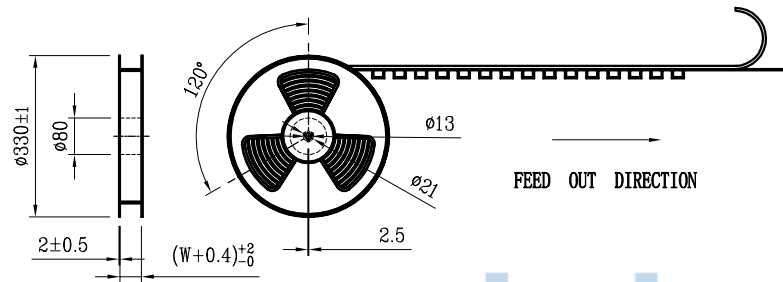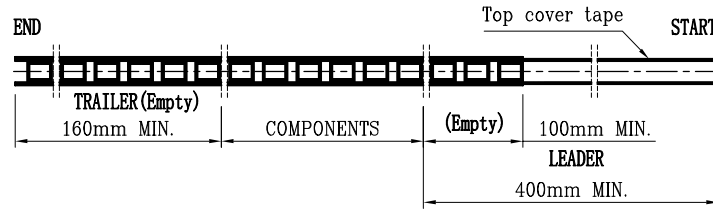

| 纸箱型号<br>Carton Type | 小型<br>Small Size | 中型<br>Medium | 标准型<br>Standard |
|---------------------|------------------|--------------|-----------------|
| 高度<br>Hight (CM)    | 7.5              | 15           | 32              |

| CKT<br>(1.0mm pitch) | B0    | W  | F     |
|----------------------|-------|----|-------|
| 2*4                  | 7.00  | 16 | 7.50  |
| 2*5                  | 8.00  |    |       |
| 2*6                  | 9.00  |    |       |
| 2*7                  | 10.00 |    |       |
| 2*8                  | 11.00 |    |       |
| 2*9                  | 12.00 | 24 | 11.50 |
| 2*10                 | 13.00 |    |       |
| 2*11                 | 14.00 |    |       |
| 2*12                 | 15.00 |    |       |
| 2*13                 | 16.00 |    |       |

| CKT<br>(1.0mm pitch) | W  | PCS/RELL | RELL/CARTON | SUM (PCS) |
|----------------------|----|----------|-------------|-----------|
| 2*4                  | 16 | 1000     | 14          | 14000     |
| 2*5                  | 16 | 1000     | 14          | 14000     |
| 2*6                  | 24 | 1000     | 10          | 10000     |
| 2*7                  | 24 | 1000     | 10          | 10000     |
| 2*8                  | 24 | 1000     | 10          | 10000     |
| 2*9                  | 24 | 1000     | 10          | 10000     |
| 2*10                 | 24 | 1000     | 10          | 10000     |
| 2*11                 | 24 | 1000     | 10          | 10000     |
| 2*12                 | 24 | 1000     | 10          | 10000     |
| 2*13                 | 24 | 1000     | 10          | 10000     |



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.  
PDWG NO: 0456-1

**深圳市步步精科技有限公司**

NAME: 针座 SHLD1.0-2x9P B型 双排 立贴 带扣 4代 无柱 米黄色 加盖盖带

PJ NO: 123-244-180004-X3G

SIZE: A4

DRW NO:

FINISH: SEE NOTES

MAT'L: SEE NOTES

SCALE: N/A




REV: A0

UNIT: mm



PAGE: 2/3

NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ .  
(10片孔距累积公差 $\pm 0.2\text{mm}$ .)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.  
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.  
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.  
(载带材料: 透明抗静电 PS.)
5. THICKNESS:  $0.35 \pm 0.05\text{mm}$ . (载带厚度:  $0.35 \pm 0.05\text{mm}$ .)
6. PACKING LENGTH PER REEL: 12.48 METERS. (每卷包装长度: 12.48米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱装分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

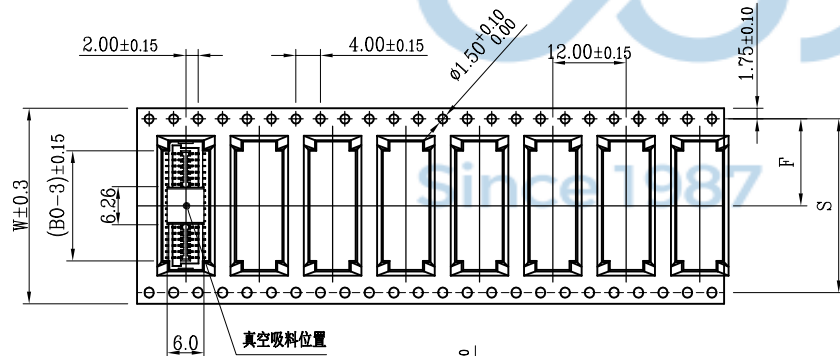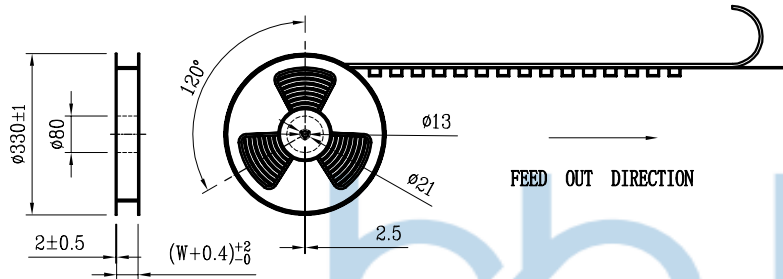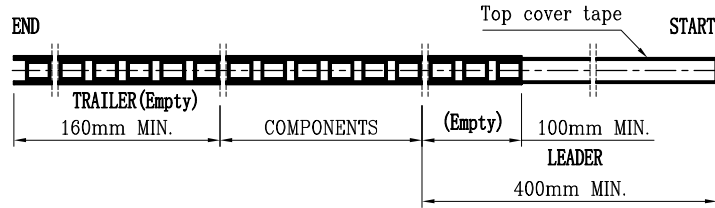

| CKT<br>(1.0mm pitch) | W  | PCS/REEL | REEL/CARTON | SUM (PCS) |
|----------------------|----|----------|-------------|-----------|
| 2*14                 | 32 | 1000     | 8           | 8000      |
| 2*15                 |    | 1000     | 8           | 8000      |
| 2*16                 |    | 1000     | 8           | 8000      |
| 2*17                 |    | 1000     | 8           | 8000      |
| 2*18                 |    | 1000     | 8           | 8000      |
| 2*19                 | 44 | 1000     | 6           | 6000      |
| 2*20                 |    | 1000     | 6           | 6000      |
| 2*21                 |    | 1000     | 6           | 6000      |
| 2*22                 |    | 1000     | 6           | 6000      |
| 2*23                 |    | 1000     | 6           | 6000      |
| 2*24                 | 44 | 1000     | 6           | 6000      |
| 2*25                 |    | 1000     | 6           | 6000      |
| 2*26                 |    | 1000     | 6           | 6000      |
| 2*27                 |    | 1000     | 6           | 6000      |
| 2*28                 |    | 1000     | 6           | 6000      |
| 2*29                 |    | 1000     | 6           | 6000      |
| 2*30                 |    | 1000     | 6           | 6000      |

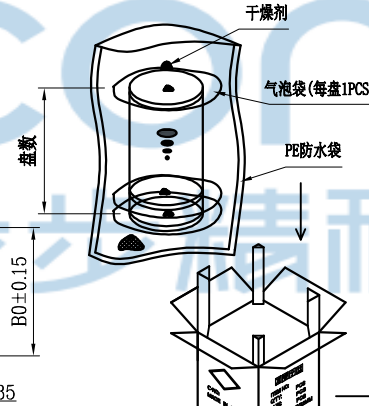

| 纸箱型号<br>Carton Type | 小型<br>Small Size | 中型<br>Medium | 标准型<br>Standard |
|---------------------|------------------|--------------|-----------------|
| 高度<br>Height (CM)   | 7.5              | 15           | 32              |

| CKT<br>(1.0mm pitch) | B0    | W  | F               | S     |
|----------------------|-------|----|-----------------|-------|
| 2*14                 | 17.00 | 32 | $14.2 \pm 0.15$ | 28.40 |
| 2*15                 | 18.00 |    |                 |       |
| 2*16                 | 19.00 |    |                 |       |
| 2*17                 | 20.00 |    |                 |       |
| 2*18                 | 21.00 |    |                 |       |
| 2*19                 | 22.00 | 44 | $20.2 \pm 0.15$ | 40.40 |
| 2*20                 | 23.00 |    |                 |       |
| 2*21                 | 24.00 |    |                 |       |
| 2*22                 | 25.00 |    |                 |       |
| 2*23                 | 26.00 |    |                 |       |
| 2*24                 | 27.00 |    |                 |       |
| 2*25                 | 28.00 |    |                 |       |
| 2*26                 | 29.00 |    |                 |       |
| 2*27                 | 30.00 |    |                 |       |
| 2*28                 | 31.00 |    |                 |       |
| 2*29                 | 32.00 |    |                 |       |
| 2*30                 | 33.00 |    |                 |       |

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1

**深圳市步步精科技有限公司**

.X:  $\pm 0.38$  .XX:  $\pm 0.25$  .XXX:  $\pm 0.13$  X\*:  $\pm 3'$  X\*:  $\pm 2'$  .XX\*:  $\pm 1'$

NAME: 针座 SHLD1.0-2x9P B型 双排 立贴 带扣 4代 无柱 米黄色 加盖编带

PJ NO: 123-244-180004-X3G

SIZE: A4

DRW NO:

FINISH: SEE NOTES

MAT'L: SEE NOTES

SCALE: N/A

REV: A0

UNIT: mm

PAGE: 3/3