

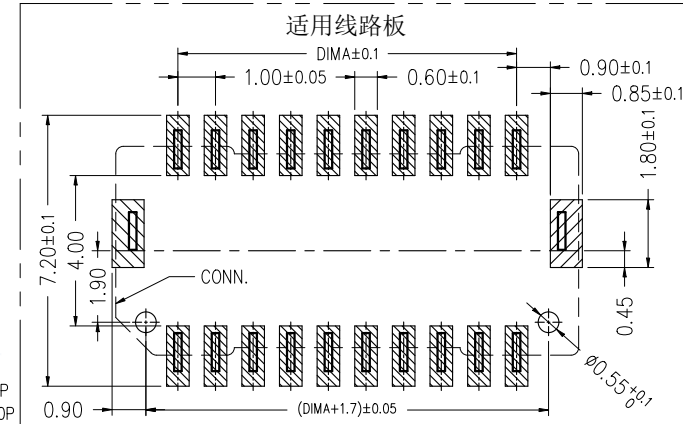
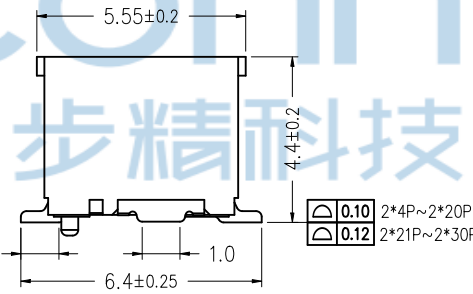
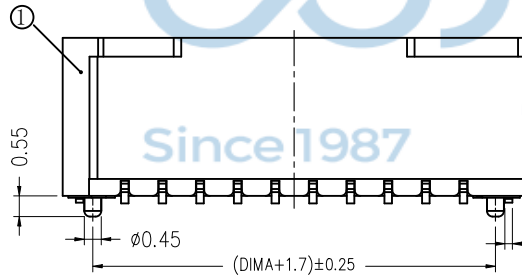
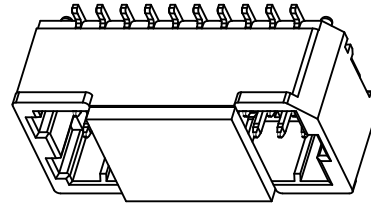
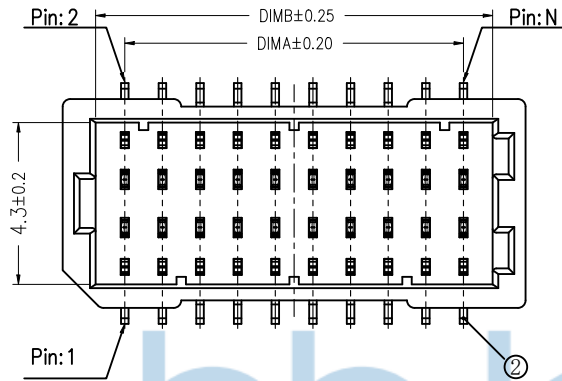


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ 。
3. 额定电压: 50V AC DC
4. 额定电流: 1.0A AC DC
5. 接触电阻: $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
6. 绝缘电阻: $\geq 100\text{M}\Omega$ 。

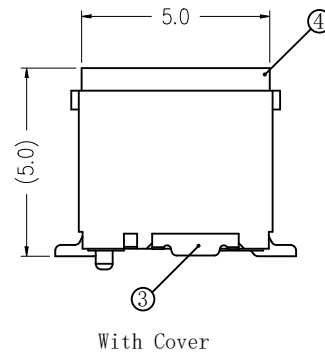

CKT	A	B	C
2*4	3.00	4.55	6.30
2*5	4.00	5.55	7.30
2*6	5.00	6.55	8.30
2*7	6.00	7.55	9.30
2*8	7.00	8.55	10.30
2*9	8.00	9.55	11.30
2*10	9.00	10.55	12.30
2*11	10.00	11.55	13.30
2*12	11.00	12.55	14.30
2*15	14.00	15.55	17.30
2*20	19.00	20.55	22.30
2*25	24.00	25.55	27.30
2*30	29.00	30.55	32.30

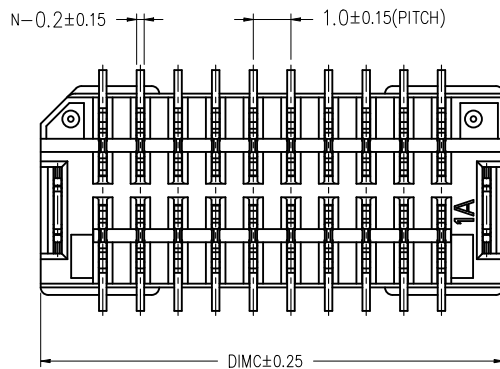

序号	品名	材质
①	胶芯	PA6T UL94V-0 米色
②	端子	铜合金/表面镀金
③	焊片	铜合金/表面镀金
④	吸盖	LCP UL94V-0 黑色


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1


深圳市步步精科技有限公司

NAME: 针座 SHD 1.0-2x20P B型 双排立贴1代 带柱 米黄色 加盖绑带	PJ NO: 123-244-400002-X3G
SIZE:A4	DRW NO:
FINISH:SEE NOTES	MAT'L:SEE NOTES
SCALE:N/A	REV:A0
UNIT:mm	PAGE: 1/4


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX




2*4P




2*5P




2*6P




2*7P




2*8P

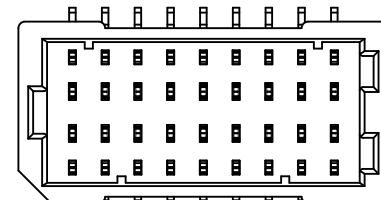


2*9P

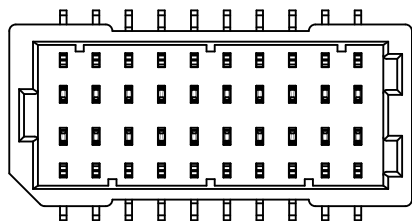


2*10P

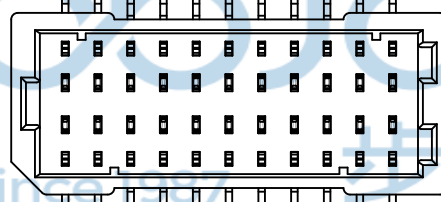


2*11P

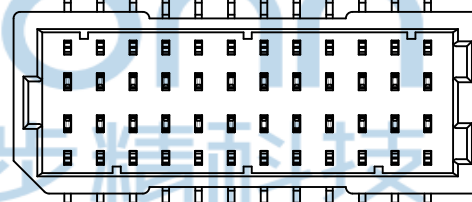


2*12P

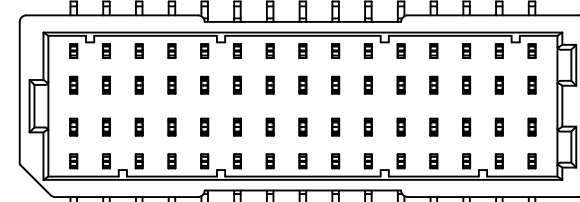


2*15P

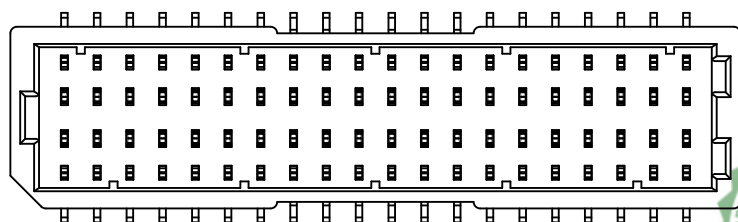



2*20P

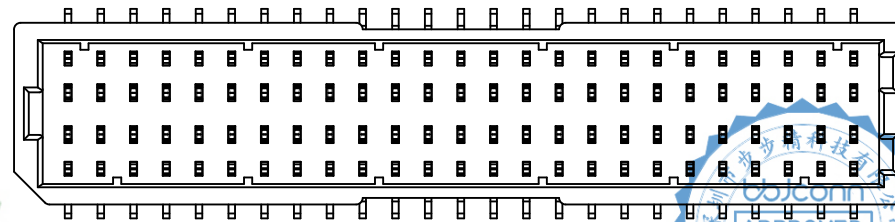

2*25P

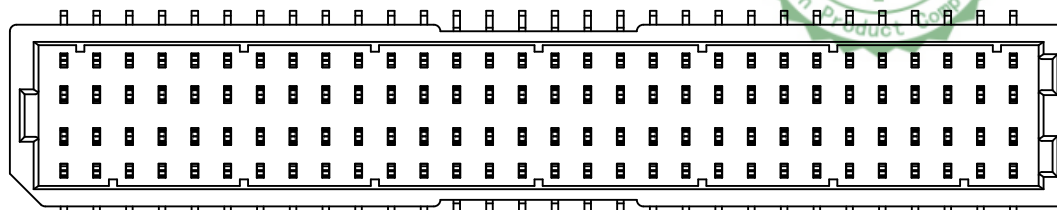

2*30P






THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 针座 SHD 1.0-2x20P B型 双排立贴1代 带柱 米黄色 加盖编带	
APPD	JM_Zheng	PJ NO: 123-244-400002-X3G	
CHKD	Tang	SIZE:A4 DRW NO:	
PDWG NO: 0456-1	DR	LYX	FINISH:SEE NOTES MAT'L:SEE NOTES
			SCALE:N/A REV:A0 UNIT:mm PAGE: 2/4


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

NOTE(注):


- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明抗静电 PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.48 METERS. (每卷包装长度: 12.48米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

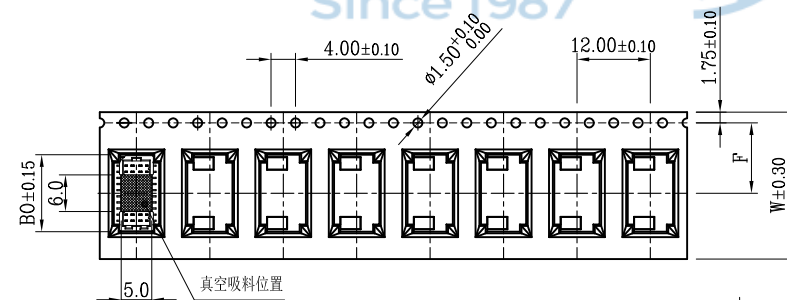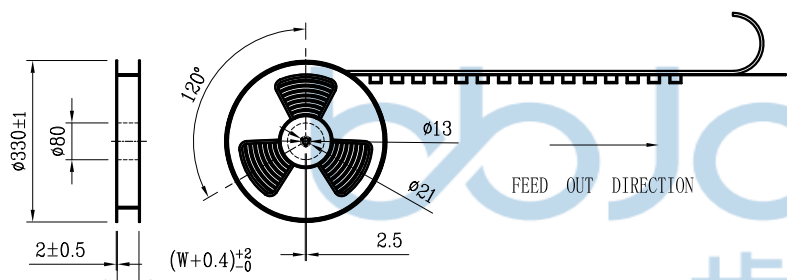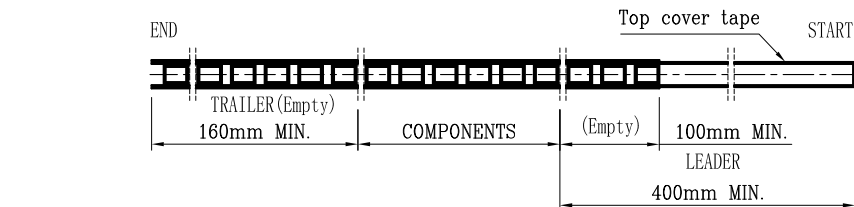

CKT (1.0mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)
2*4	16	1000	14	14000
2*5	16	1000	14	14000
2*6	24	1000	10	10000
2*7	24	1000	10	10000
2*8	24	1000	10	10000
2*9	24	1000	10	10000
2*10	24	1000	10	10000
2*11	24	1000	10	10000
2*12	24	1000	10	10000
2*13	24	1000	10	10000

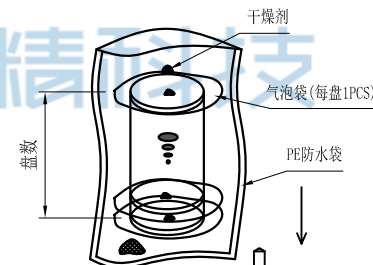

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

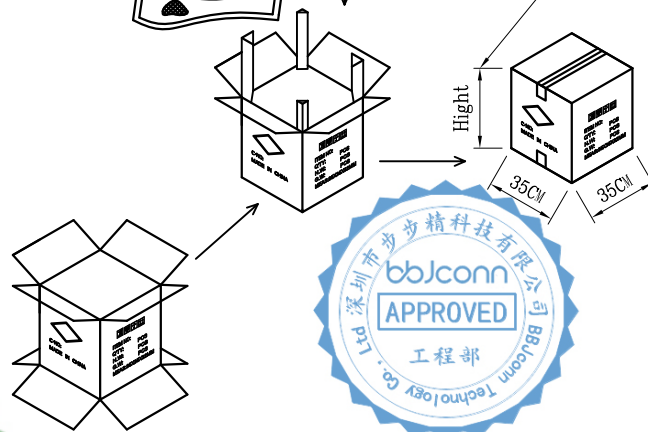

CKT (1.0mm pitch)	B0	W	F
2*4	6.60	16	7.50
2*5	7.60	16	7.50
2*6	8.60	16	7.50
2*7	9.60	16	7.50
2*8	10.60	16	7.50
2*9	11.60	16	7.50
2*10	12.60	16	7.50
2*11	13.60	16	7.50
2*12	14.60	16	7.50
2*13	15.60	16	7.50



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

APPD
CHKD
DR




JM_Zheng
Tang
LYX

NAME: 针座 SHD 1.0-2x20P B型 双排立贴1代
带柱 米黄色 加盖编带


PJ NO: 123-244-400002-X3G
SIZE: A4
FINISH: SEE NOTES
SCALE: N/A

DRW NO:
MAT'L: SEE NOTES
REV: A0
UNIT: mm
PAGE: 3/4

PDWG NO: 0456-1

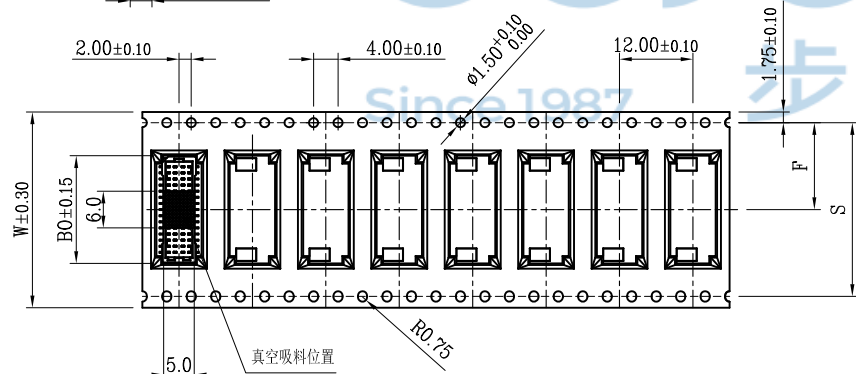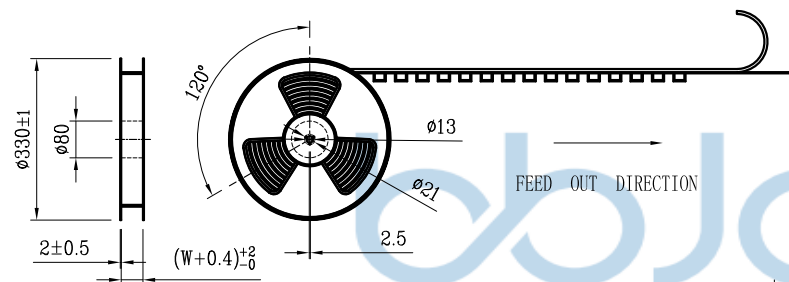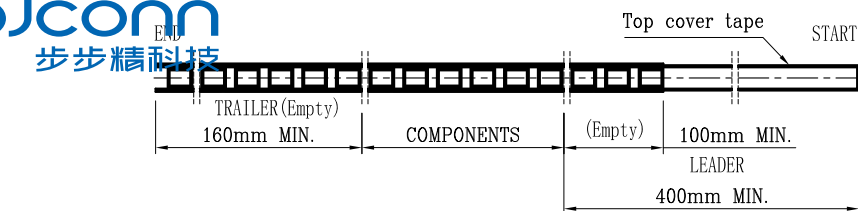


CKT (1.0mm pitch)	W	PCS/RELL	RELL/CARTON	SUM (PCS)
2*14	32	1000	8	8000
2*15		1000	8	8000
2*16		1000	8	8000
2*17		1000	8	8000
2*18		1000	8	8000
2*19		1000	6	6000
2*20	44	1000	6	6000
2*21		1000	6	6000
2*22		1000	6	6000
2*23		1000	6	6000
2*24		1000	6	6000
2*25		1000	6	6000
2*26		1000	6	6000
2*27		1000	6	6000
2*28		1000	6	6000
2*29		1000	6	6000
2*30		1000	6	6000

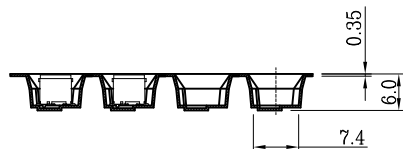

NOTE (注) :

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明抗静电 PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.48 METERS. (每卷包装长度: 12.48米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

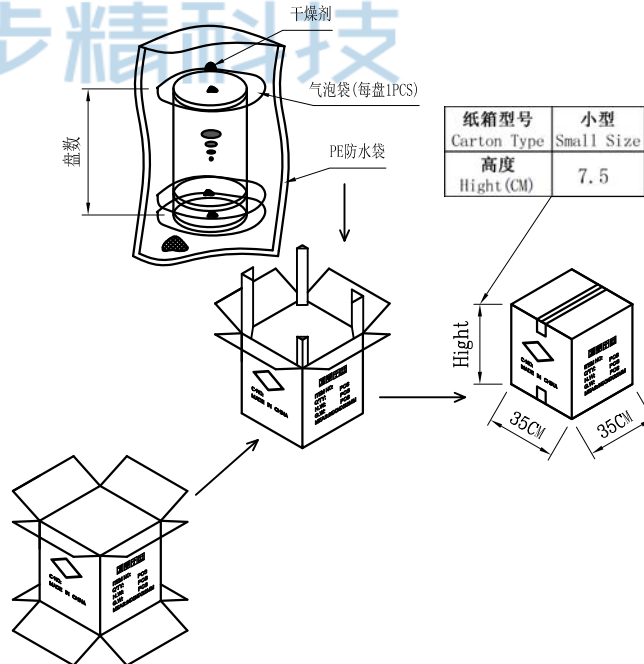

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT (1.0mm pitch)	B0	W	F	S
2*14	16.60	32	14.2±0.15	28.40
2*15	17.60			
2*16	18.60			
2*17	19.60			
2*18	20.60			
2*19	21.60	44	20.2±0.15	40.40
2*20	22.60			
2*21	23.60			
2*22	24.60			
2*23	25.60			
2*24	26.60			
2*25	27.60			
2*26	28.60			
2*27	29.60			
2*28	30.60			
2*29	31.60			
2*30	32.60			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



 深圳市步步精科技有限公司

.X: ± 0.38	X*: ± 3
.XX: ± 0.25	.X*: ± 2
.XXX: ± 0.13	.XX*: ± 1

APPD	JM_Zheng
------	----------

CHKD	Tang
------	------

DR	LY
----	----

NAME: 针座 SHD 1.0-2x20P B型 双排立贴1代
带柱 米黄色 加盖编带



PJ NO: 123-244-400002-X3G

SIZE: A4	DRW NO:
ENCL: SEE NOTES	ENCL: SEE NOTES

FINISH:SEE NOTES		MAT'L:SEE NOTES	
SCALE:N/A	REV:A0	UNIT:mm	PAGE: 1/1