
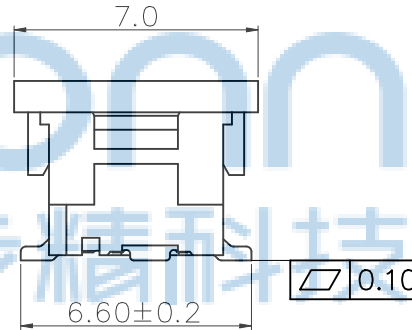
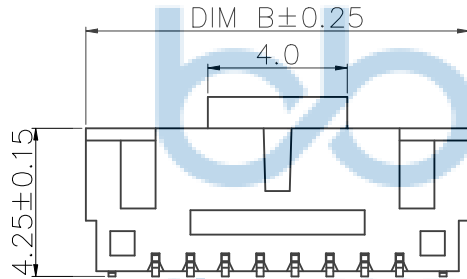
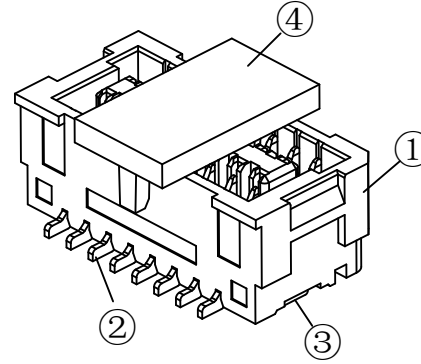




| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | SGF      |

技术指标:

- 1、温度范围:  $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ ;
- 2、额定电压: 50V, AC, DC;
- 3、额定电流: 1A;
- 4、接触电阻:  $\leq 0.02\ \Omega$ ;
- 5、绝缘电阻:  $\geq 100\text{M}\ \Omega$ ;
- 6、耐压: 500V, AC/ minute.

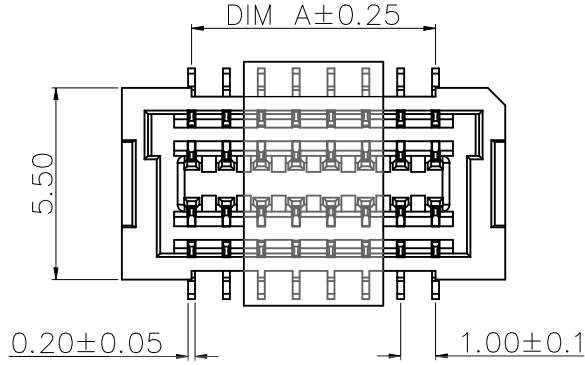

| Poles | DIM. A | DIM. B |
|-------|--------|--------|
| 2*3A  | 2.00   | 6.00   |
| 2*4A  | 3.00   | 7.00   |
| 2*5A  | 4.00   | 8.00   |
| 2*6A  | 5.00   | 9.00   |
| 2*7A  | 6.00   | 10.00  |
| 2*8A  | 7.00   | 11.00  |
| 2*9A  | 8.00   | 12.00  |
| 2*10A | 9.00   | 13.00  |
| 2*11A | 10.00  | 14.00  |
| 2*12A | 11.00  | 15.00  |
| 2*13A | 12.00  | 16.00  |
| 2*14A | 13.00  | 17.00  |
| 2*15A | 14.00  | 18.00  |
| 2*16A | 15.00  | 19.00  |

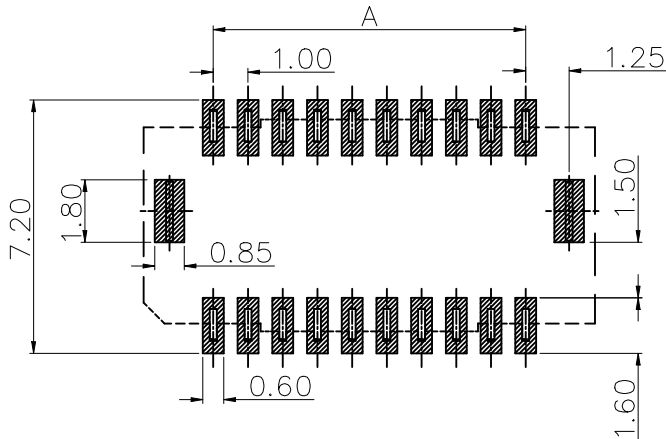

Assembly Layout



|    |                |                    |     |                  |
|----|----------------|--------------------|-----|------------------|
| 4  | 吸附盖CAP         | PA9T (UL94V-0)     | 1   | 本色               |
| 3  | 焊片Fitting Nail | 磷铜Phosphor Braonze | 2   | 电镀锡Tin-Plated    |
| 2  | 端子Contact      | 磷铜Phosphor Braonze | Nx2 | 电镀Au/锡Tin-Plated |
| 1  | 基座Wafer        | PA9T (UL94V-0)     | 1   | 本色               |
| 序号 | 名称             | 材料                 | 数量  | 附注               |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0940-1

深圳市步步精科技有限公司

NAME:  
针座 SHLD 1.0-2x8P 双排 立贴 带扣 米黄色 编带

APPD. JM\_Zheng

CHKD. LYX

DR. SGF

.X: ±0.38  
.XX: ±0.25  
.XXX: ±0.13

X': ±3'  
.X': ±2'  
.XX': ±1'

PJ. NO.: 123-244-160001-G9G


SIZE: A4 DRW NO.:

FINISH: SEE NOTES

SCALE: N/A






UNIT: mm

PAGE: 1/2

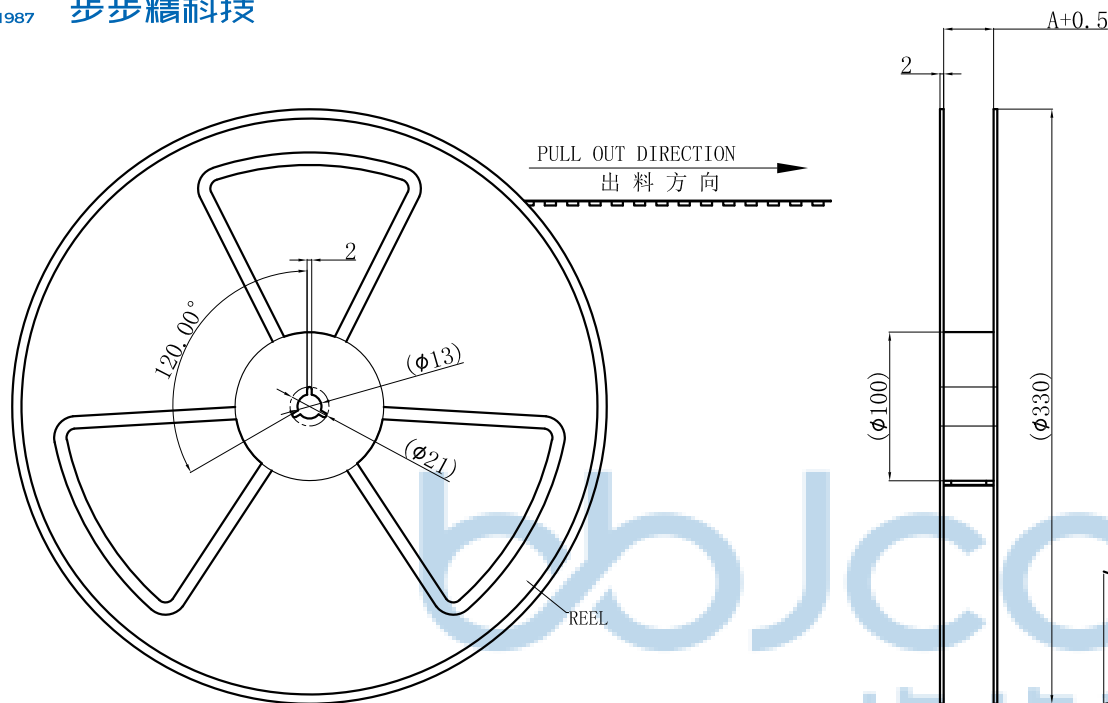

Note:

1. Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
2. Carrier camber is within 1mm in 100mm.
3. All dimensions meet EIA-481-D requirements.
4. Material of top fape: PET, PE, PEF
5. Material of carrier fape: Polystyrene
6. For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm pilot holes are provided on both sides.

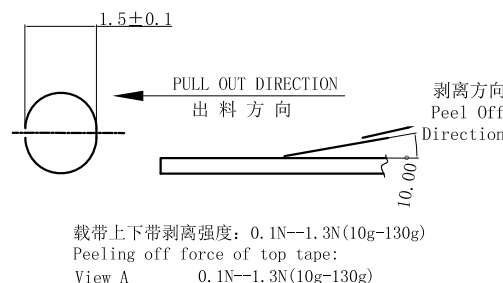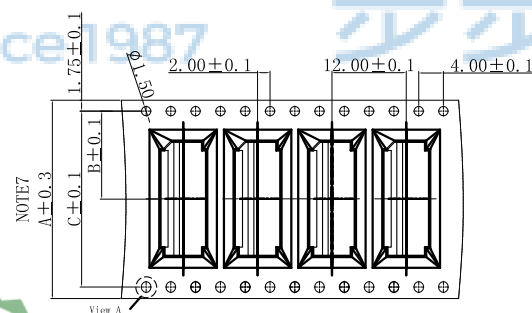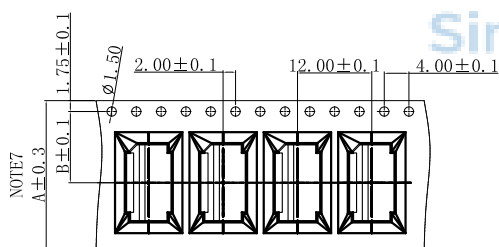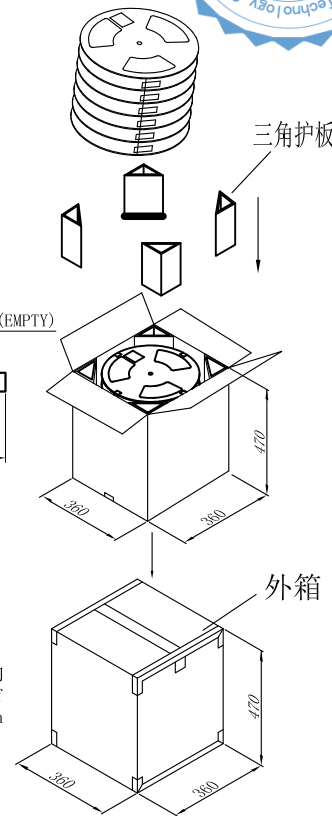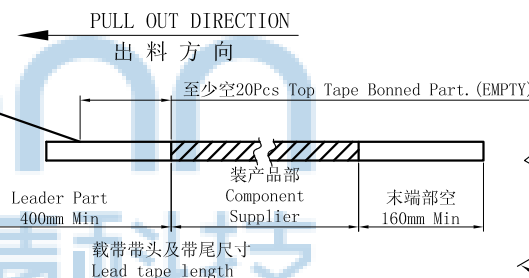

载带上下带剥离强度: 0.1N--1.3N(10g-130g)  
Peeling off force of top tape:  
View A 0.1N--1.3N(10g-130g)

PULL OUT DIRECTION  
出料方向

宽度: 16mm/24mm 载带

PULL OUT DIRECTION  
出料方向

宽度: 32mm/44mm 载带



| 芯数<br>Pin (n) | 尺寸 Size |      |      | Q'ty/Eeel<br>(Pcs) | Q'ty/Caton<br>(Pcs) | Packing<br>(Eeel/Caton) |
|---------------|---------|------|------|--------------------|---------------------|-------------------------|
|               | A       | B    | C    |                    |                     |                         |
| 2*3-207       | 16.0    | 7.50 | ---  | 1000               | 16                  | 16000                   |
| 2*8-2*13      | 24.0    | 11.5 | ---  | 1000               | 12                  | 12000                   |
| 2*14-2*16     | 32.0    | 14.5 | 28.4 | 1000               | 9                   | 9000                    |
| -             | -       | -    | -    | -                  | -                   | -                       |

|            |             |    |    |   |
|------------|-------------|----|----|---|
| PART No.   | 1.0双排立贴-NP  |    |    |   |
| REEL WIDTH | 16          | 24 | 32 | - |
| PCS/REEL   | 1000pcs     |    |    |   |
| CTN. SIZE  | 360*360*470 |    |    |   |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.

Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0940-1

**深圳市步步精科技有限公司**

.X:  $\pm 0.38$  .X':  $\pm 3'$   
.XX:  $\pm 0.25$  .X':  $\pm 2'$   
.XXX:  $\pm 0.13$  .XX':  $\pm 1'$   
APPD. JM\_Zheng  
CHKD. LYX  
DR. SGF

NAME:  
针座 SHLD 1.0-2x8P 双排 立贴 带扣 米黄色 编带  
PJ. NO.: 123-244-160001-G9G  
SIZE: A4 DRW NO.:  
FINISH: SEE NOTES MAT'L: SEE NOTES  
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2