
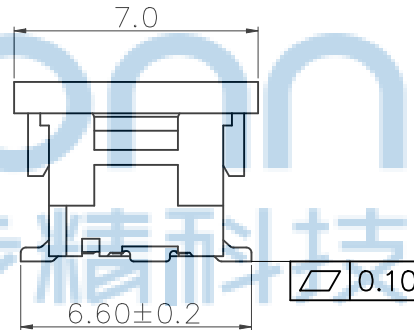
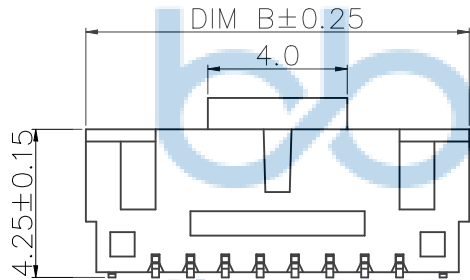
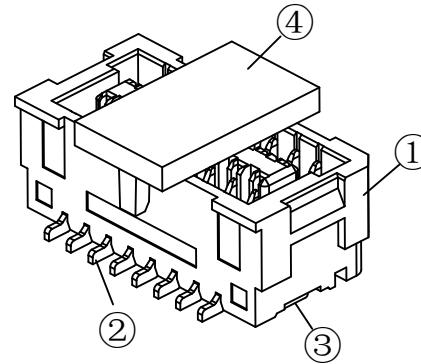



| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | SGF      |

技术指标:


- 1、温度范围:  $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ ;
- 2、额定电压: 50V, AC, DC;
- 3、额定电流: 1A;
- 4、接触电阻:  $\leq 0.02\ \Omega$ ;
- 5、绝缘电阻:  $\geq 100\text{M}\ \Omega$ ;
- 6、耐压: 500V, AC/ minute.

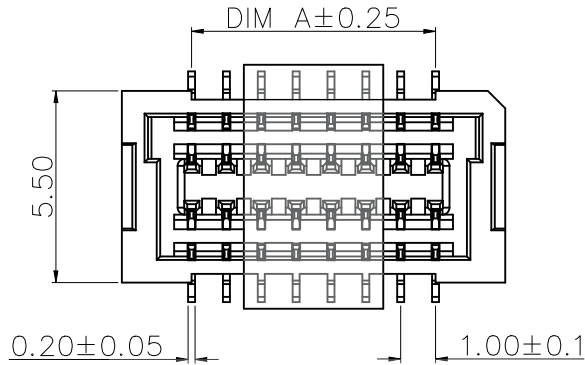

| Poles | DIM. A | DIM. B |
|-------|--------|--------|
| 2*3A  | 2.00   | 6.00   |
| 2*4A  | 3.00   | 7.00   |
| 2*5A  | 4.00   | 8.00   |
| 2*6A  | 5.00   | 9.00   |
| 2*7A  | 6.00   | 10.00  |
| 2*8A  | 7.00   | 11.00  |
| 2*9A  | 8.00   | 12.00  |
| 2*10A | 9.00   | 13.00  |
| 2*11A | 10.00  | 14.00  |
| 2*12A | 11.00  | 15.00  |
| 2*13A | 12.00  | 16.00  |
| 2*14A | 13.00  | 17.00  |
| 2*15A | 14.00  | 18.00  |
| 2*16A | 15.00  | 19.00  |

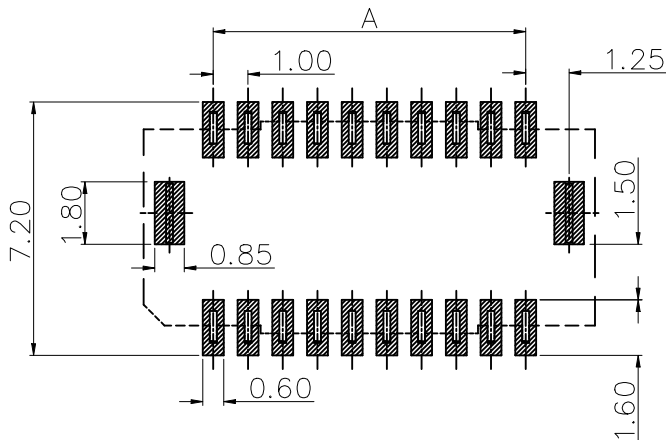

SUGGESTED PCB LAYOUT





Assembly Layout




THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0940-1

|                                                       |  |                                           |  |
|-------------------------------------------------------|--|-------------------------------------------|--|
| 深圳市步步精科技有限公司                                          |  |                                           |  |
| .X: $\pm 0.38$<br>.XX: $\pm 0.25$<br>.XXX: $\pm 0.13$ |  | NAME:<br>针座 SHLD 1.0-2x9P 双排 立贴 带扣 米黄色 编带 |  |
| X': $\pm 3'$<br>X'': $\pm 2'$<br>XX': $\pm 1'$        |  | PJ. NO.: 123-244-180001-G9G               |  |
| APPD. JM_Zheng                                        |  | SIZE: A4 DRW NO.:                         |  |
| CHKD. LYX                                             |  | FINISH: SEE NOTES                         |  |
| DR. SGF                                               |  | MAT'L: SEE NOTES                          |  |
|                                                       |  | SCALE: N/A                                |  |
|                                                       |  | REV.: A0                                  |  |
|                                                       |  | UNIT: mm                                  |  |
|                                                       |  | PAGE: 1/2                                 |  |

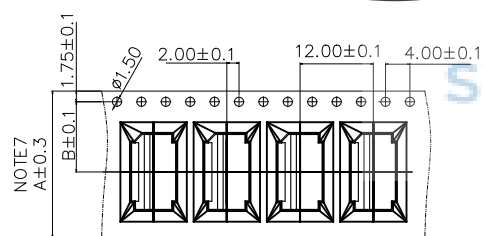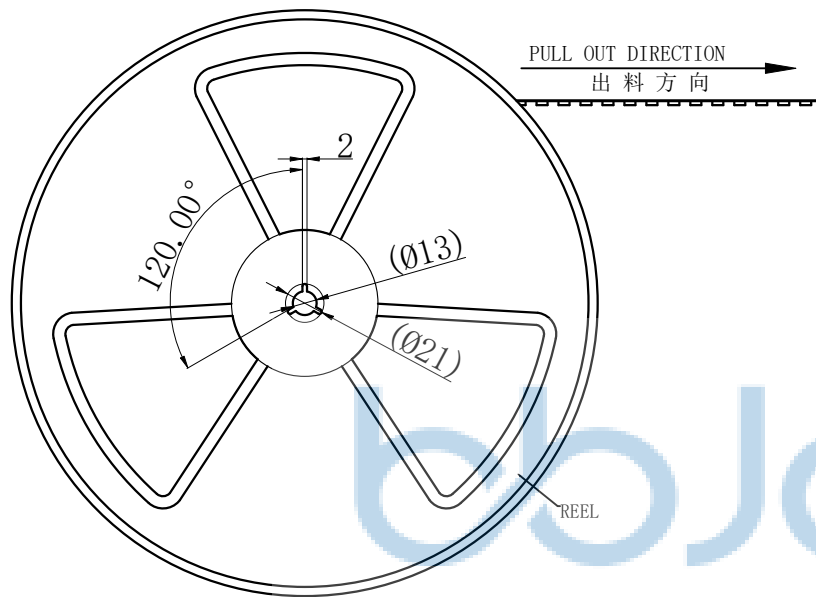

PULL OUT DIRECTION  
出料方向


宽度:16mm/24mm 载带

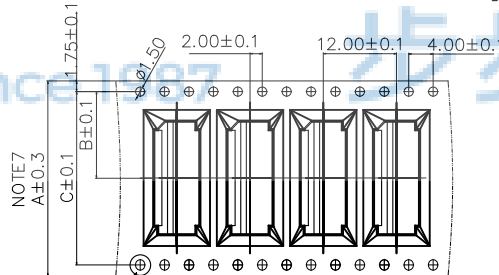

View A


PULL OUT DIRECTION  
出料方向

宽度:32mm/44mm 载带

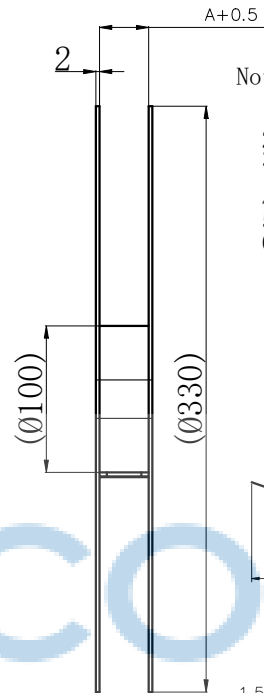

Note:


1. Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
2. Carrier camber is within 1mm in 100mm.
3. All dimensions meet EIA-481-D requirements.
4. Material of top fape: PET, PE, PEF
5. Material of carrier fape: Polystyrene
6. For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm pilot holes are provided on both sides.

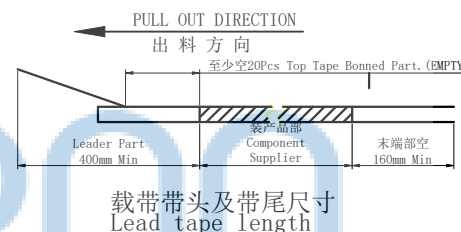

载带带头及带尾尺寸  
Lead tape length



载带上下带剥离强度: 0.1N--1.3N (10g-130g)  
Peeling off force of top tape:  
View A 0.1N--1.3N (10g-130g)

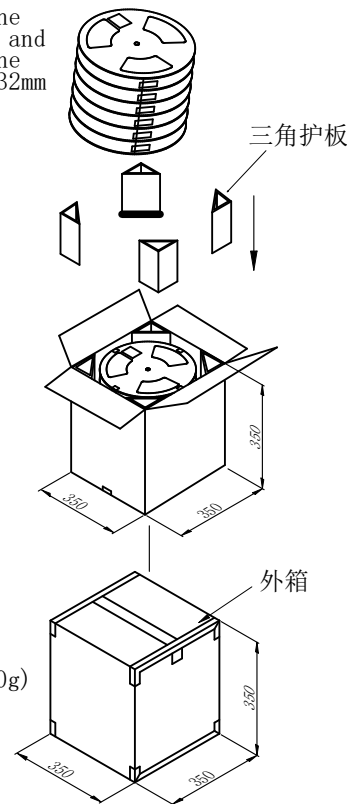

| 芯数<br>Pin (n) | 尺寸 Size |      |     |
|---------------|---------|------|-----|
|               | A       | B    | C   |
| 2*2-2*7       | 16.0    | 7.50 | --- |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG. NO: 0940-1

|                  |                |                                        |  |
|------------------|----------------|----------------------------------------|--|
| 深圳市步步精科技有限公司     |                |                                        |  |
| .X: $\pm 0.38$   | X': $\pm 3'$   | NAME:                                  |  |
| .XX: $\pm 0.25$  | X': $\pm 2'$   | 针座 SHLD 1.0-2x9P 双排 立贴 带扣 米黄色 编带       |  |
| .XXX: $\pm 0.13$ | .XX': $\pm 1'$ | PJ. NO.: 123-244-180001-G9G            |  |
| APPD.            | JM_Zheng       | SIZE: A4 DRW NO.:                      |  |
| CHKD.            | LYX            | FINISH: SEE NOTES MAT'L: SEE NOTES     |  |
| DR.              | SGF            | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2 |  |

| 芯数      | 盘数  | 箱数     |
|---------|-----|--------|
| 2*2-2*7 | 16盘 | 16000只 |