


技术指标:  
1、温度范围: -25° C~85° C;  
2、额定电压: 50V, AC, DC;  
3、额定电流: 1A;  
3、接触电阻: ≤0.02 Ω;  
4、绝缘电阻: ≥100M Ω;  
5、耐压: 500V, AC/minute.



| Poles | DIM. A | DIM. B |
|-------|--------|--------|
| 2*4A  | 3.00   | 6.30   |
| 2*5A  | 4.00   | 7.30   |
| 2*6A  | 5.00   | 8.30   |
| 2*7A  | 6.00   | 9.30   |
| 2*8A  | 7.00   | 10.30  |
| 2*9A  | 8.00   | 11.30  |
| 2*10A | 9.00   | 12.30  |
| 2*11A | 10.00  | 13.30  |
| 2*12A | 11.00  | 14.30  |
| 2*13A | 12.00  | 15.30  |
| 2*14A | 13.00  | 16.30  |
| 2*15A | 14.00  | 17.30  |
| 2*16A | 15.00  | 18.30  |

|    |     |      |     |     |
|----|-----|------|-----|-----|
| 1  | 基座  | PA9T | 1   | 米黄色 |
| 2  | 端子  | 磷铜   | n*1 | 镀锡  |
| 3  | 焊片  | 磷铜   | 2   | 镀锡  |
| 4  | 盖子  | PA9T | 1   | 米黄色 |
| 序号 | 名 称 | 材 料  | 数 量 | 附 注 |

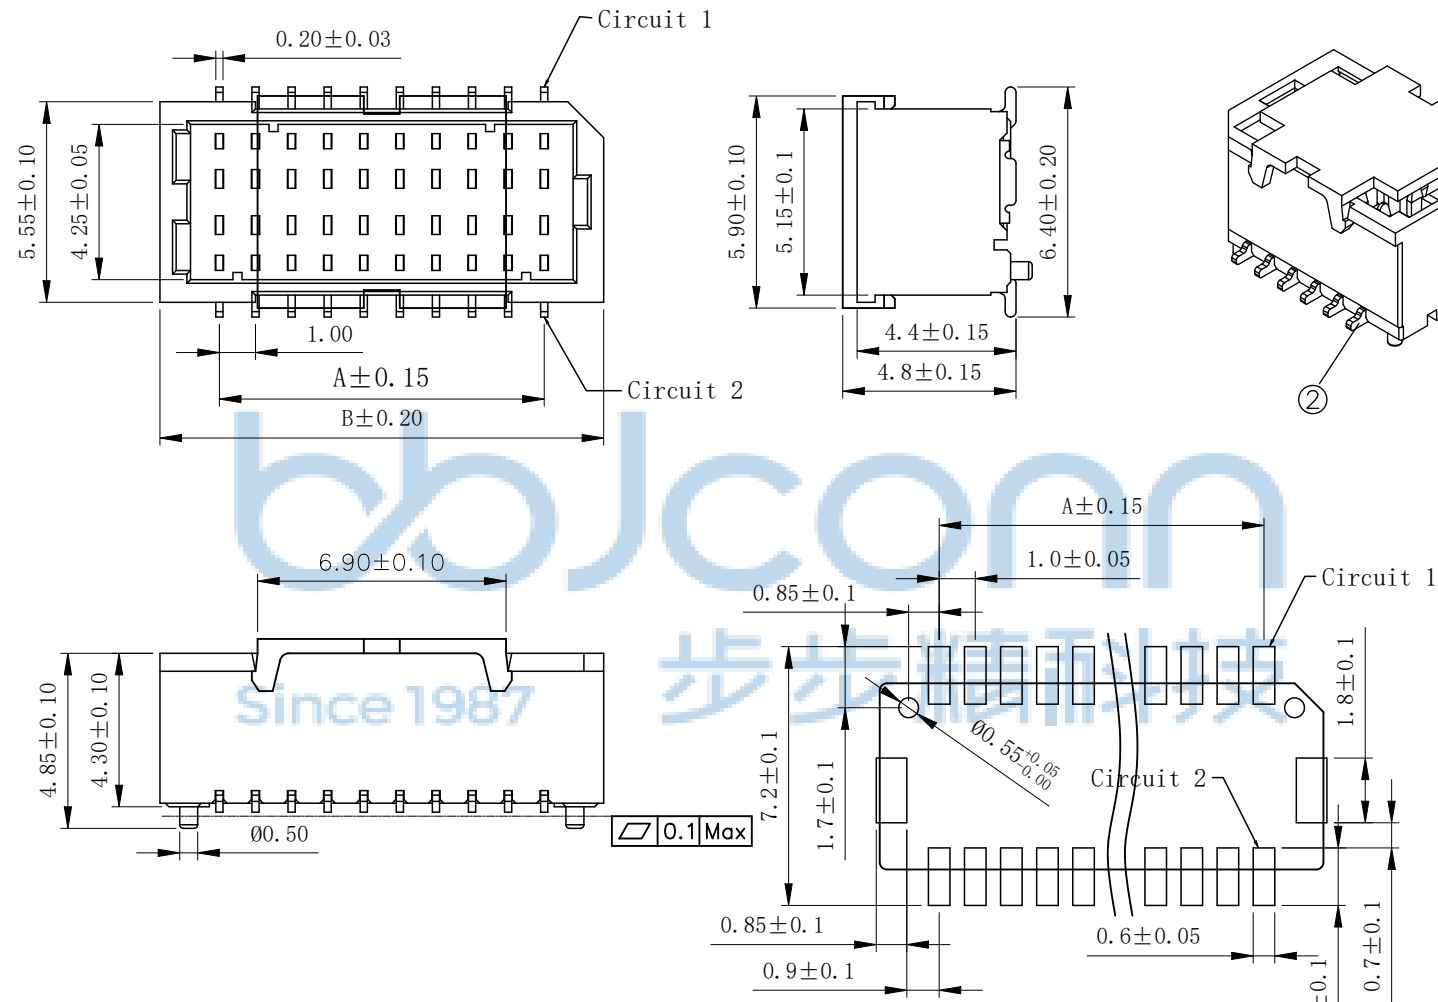

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.

PDWG NO: 0940-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'  
.XX: ±0.25 .X': ±2'  
.XXX: ±0.13 .XX': ±1'

NAME:  
针座 1.0-2x10P 双排 立贴 带柱 米黄色 编带

PJ NO: 123-244-200002-G9G

SIZE:A4 DRW NO:


FINISH:SEE NOTES MAT'L:SEE NOTES



SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

APPD JM\_Zheng

CHKD LYX


DR SGF



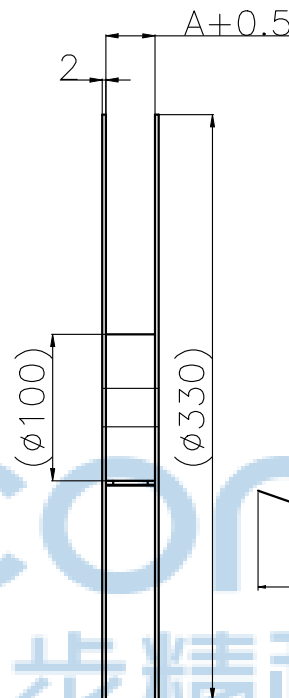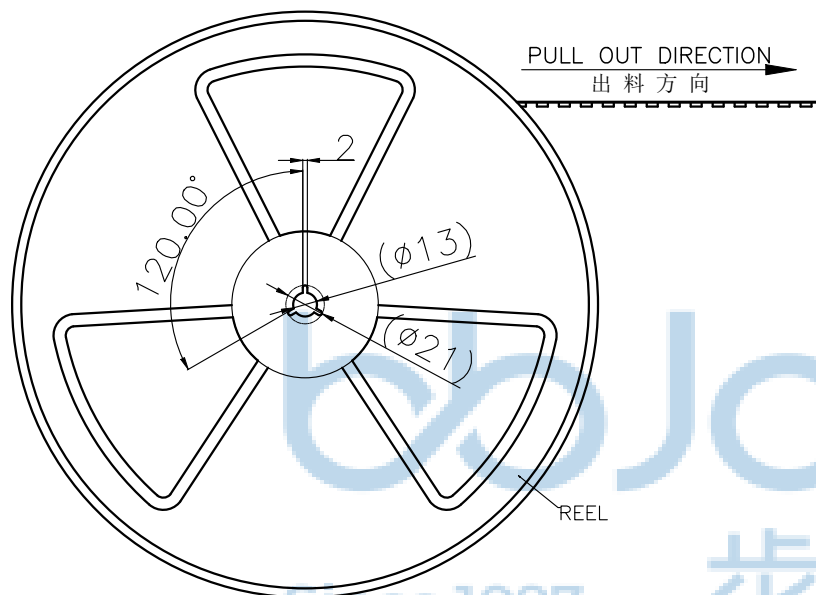

Note:



- 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Material of top fape: PET, PE, PEF
- 5.Material of carrier fape: Polystyrene
- 6.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm pilot holes are provided on both sides.

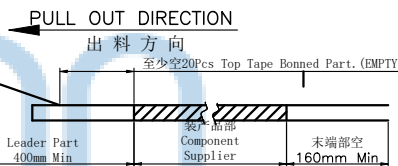

载带带头及带尾尺寸  
Lead tape length




载带上下带剥离强度:  
0.1N--1.3N(10g-130g)  
Viewing off force of top tape:  
0.1N--1.3N(10g-130g)

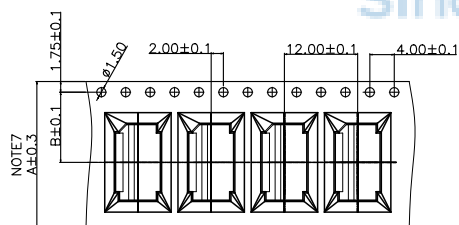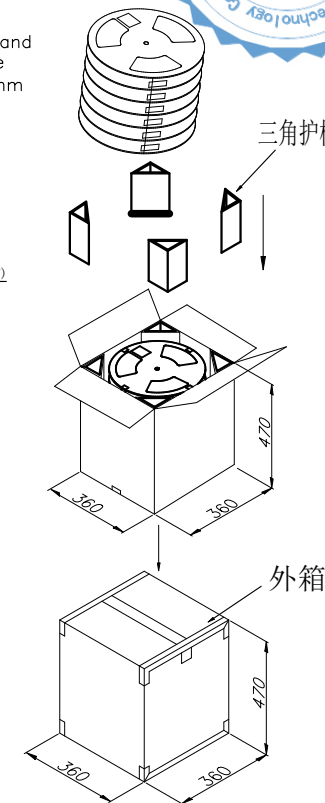


PULL OUT DIRECTION  
出料方向

宽度: 16mm/24mm 载带

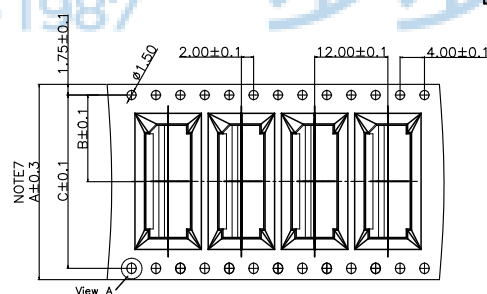

PULL OUT DIRECTION  
出料方向

宽度: 32mm/44mm 载带



| 芯数<br>Pin (n) | 尺寸 Size |      |      | PART No.   |             |    |    |
|---------------|---------|------|------|------------|-------------|----|----|
|               | A       | B    | C    | REEL WIDTH | 16          | 24 | 32 |
| 2*4-207       | 16.0    | 7.50 | ---  | PCS/REEL   | 1000pcs     |    |    |
| 2*8-2*14      | 24.0    | 11.5 | ---  | CTN. SIZE  | 360*360*470 |    |    |
| 2*15-2*16     | 32.0    | 14.5 | 28.4 |            |             |    |    |



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.

PDWG NO: 0940-1

深圳市步步精科技有限公司

.X:  $\pm 0.38$  X':  $\pm 3'$   
.XX:  $\pm 0.25$  .X':  $\pm 2'$   
.XXX:  $\pm 0.13$  .XX':  $\pm 1'$

APPD JM\_Zheng

CHKD LYX

DR SGF

NAME:  
针座 1.0-2x10P 双排 立贴 带柱 米黄色 编带

PJ NO: 123-244-200002-G9G

SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: AO UNIT: mm PAGE: 2/2