

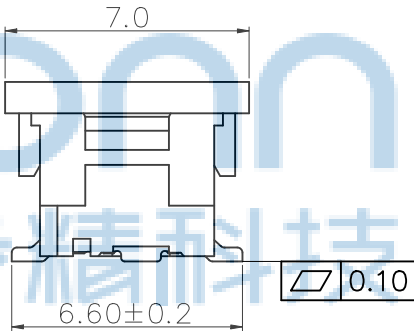
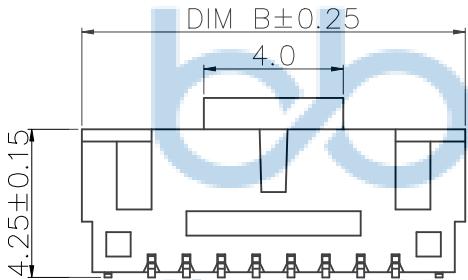
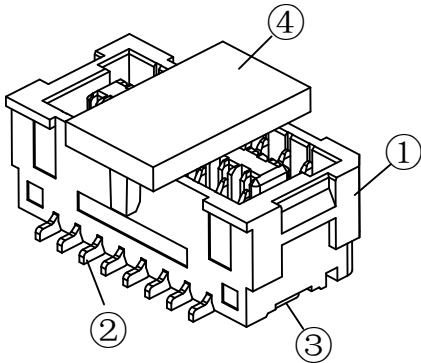
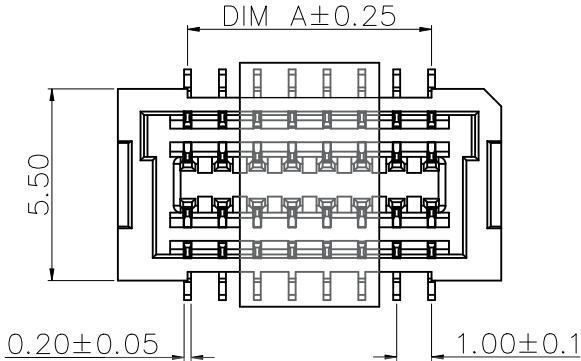


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

- 技术指标:
- 1、温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$;
 - 2、额定电压: 50V, AC, DC;
 - 3、额定电流: 1A;
 - 4、接触电阻: $\leq 0.02\ \Omega$;
 - 5、绝缘电阻: $\geq 100\text{M}\ \Omega$;
 - 6、耐压: 500V, AC/ minute.



Poles	DIM. A	DIM. B
2*3A	2.00	6.00
2*4A	3.00	7.00
2*5A	4.00	8.00
2*6A	5.00	9.00
2*7A	6.00	10.00
2*8A	7.00	11.00
2*9A	8.00	12.00
2*10A	9.00	13.00
2*11A	10.00	14.00
2*12A	11.00	15.00
2*13A	12.00	16.00
2*14A	13.00	17.00
2*15A	14.00	18.00
2*16A	15.00	19.00

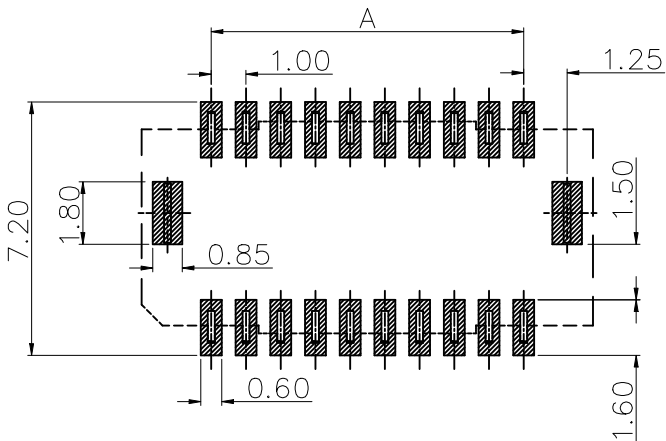

Assembly Layout



4	吸附盖CAP	PA9T (UL94V-0)	1	本色
3	焊片Fitting Nail	磷铜Phosphor Braonze	2	电镀锡Tin-Plated
2	端子Contact	磷铜Phosphor Braonze	Nx2	电镀Au/锡Tin-Plated
1	基座Wafer	PA9T (UL94V-0)	1	本色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0940-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME:
针座 SHLD 1.0-2x15P 双排 立贴 带扣 米黄色 编带

APPD. JM_Zheng

PJ. NO.: 123-244-300001-G9G


CHKD. LYX

SIZE: A4 DRW NO.:


DR. SGF

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

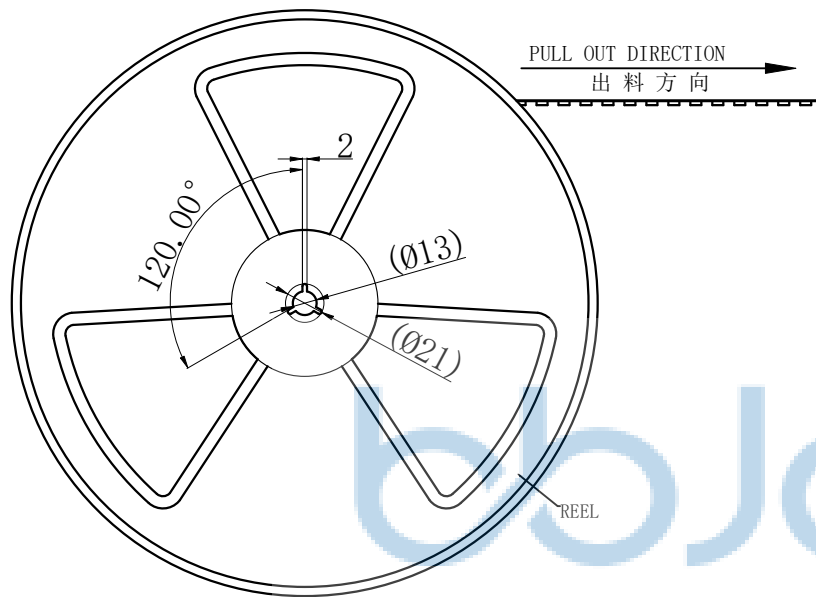


PULL OUT DIRECTION
出料方向

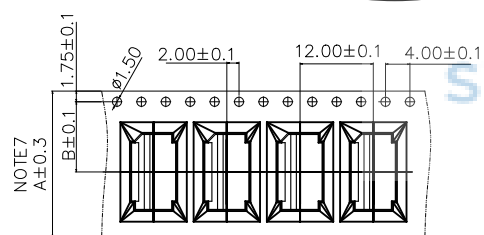


PULL OUT DIRECTION
出料方向

宽度:16mm/24mm 载带

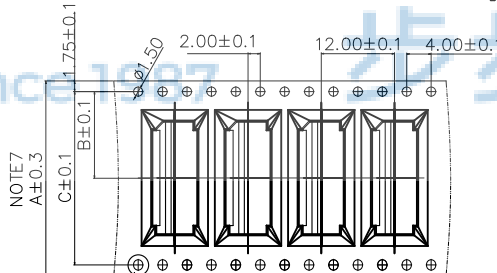


PULL OUT DIRECTION
出料方向

宽度:32mm/44mm 载带

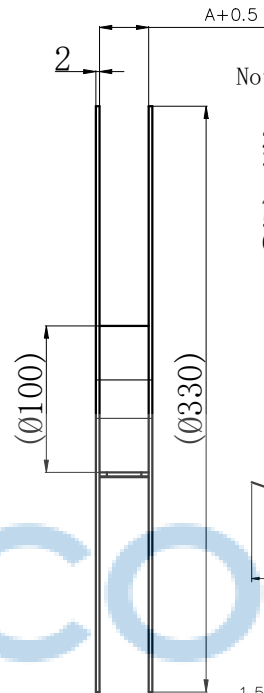

Note:


1. Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
2. Carrier camber is within 1mm in 100mm.
3. All dimensions meet EIA-481-D requirements.
4. Material of top fape: PET, PE, PEF
5. Material of carrier fape: Polystyrene
6. For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm pilot holes are provided on both sides.

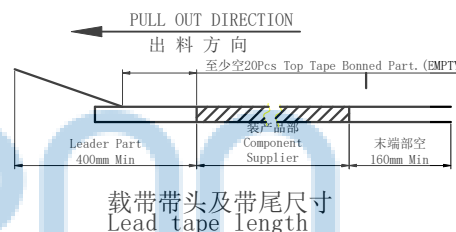

载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N--1.3N (10g-130g)
Peeling off force of top tape:
View A 0.1N--1.3N (10g-130g)

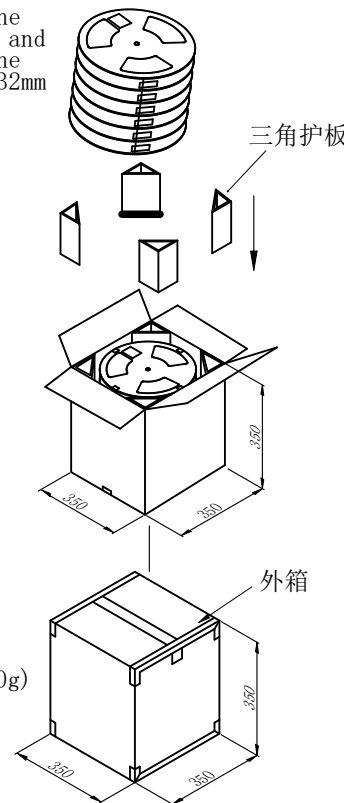

芯数 Pin (n)	尺寸 Size		
	A	B	C
2*2-2*7	16.0	7.50	---

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0940-1

深圳市步步精科技有限公司			
.X: ± 0.38	X': $\pm 3'$	NAME:	
.XX: ± 0.25	X': $\pm 2'$	针座 SHLD 1.0-2x15P 双排 立贴 带扣 米黄色 编带	
.XXX: ± 0.13	.XX': $\pm 1'$	PJ. NO.: 123-244-300001-G9G	
APPD.	JM_Zheng	SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES MAT'L: SEE NOTES	
DR.	SGF	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	

芯数	盘数	箱数
2*2-2*7	16盘	16000只