
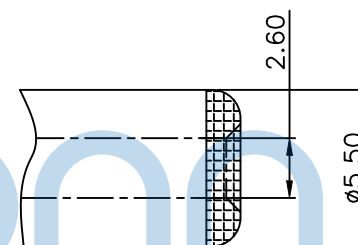


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP



规格:

1. 额定值: DC30V 0.5A
2. 接触电阻: $\leq 30m\Omega$
3. 绝缘电阻: $\geq 100M\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}C \sim +80^{\circ}C$

PIN	$\phi 2.0$	$\phi 2.5$
APPO		

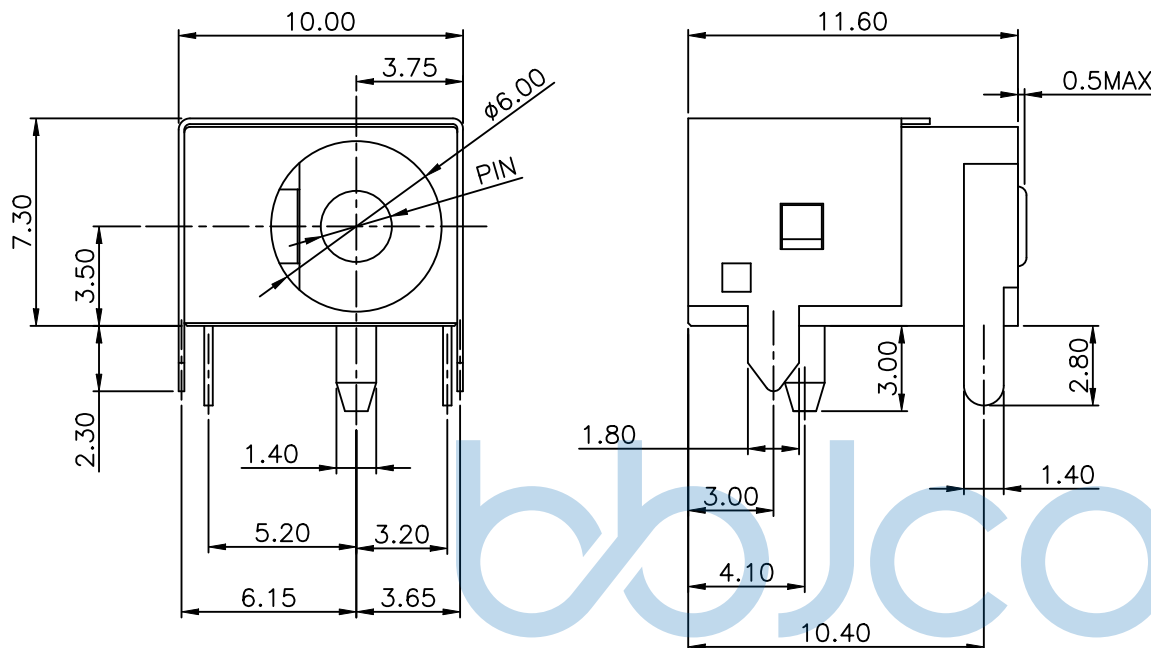

推荐插头尺寸

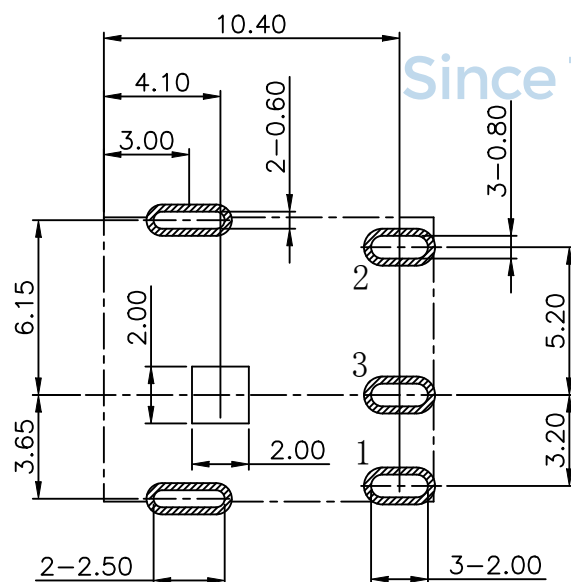

电路示意图

P. C. B 设计参考尺寸


6	上盖	磷铜 T=0.2mm	1	镀铜锡
5	主体	PA9T	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.4mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2


深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3^{\circ}$.X': $\pm 2^{\circ}$.XX': $\pm 1^{\circ}$	NAME: DC插座 DC-044B 2.5针 全铜 五脚插 长柱 半包
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: DC.02.72-11-2012
DR. TSP		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

PE袋规格: 260*185

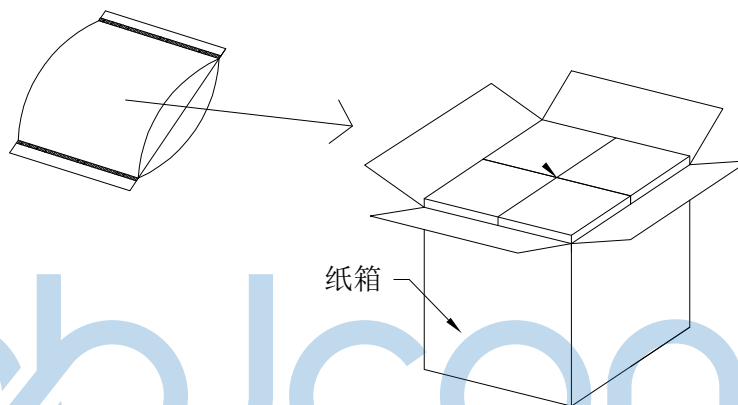

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0050-2	DR.	TSP	NAME: DC插座 DC-044B 2.5针 全铜 五脚插 长柱 半包
APPD.	JM_Zheng	CHKD.	LYX
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3' X*: ±2' XX*: ±1'	
PJ. NO.: DC.02.72-11-2012		SIZE: A4 DRW NO.:	
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0 UNIT: mm PAGE: 2/2	