

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.



2.PLATING:

UNDERPLATE: NICKEL.



CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: GOLD OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

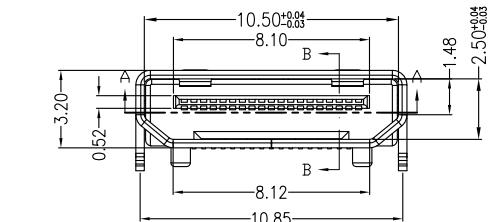


SECTION B-B

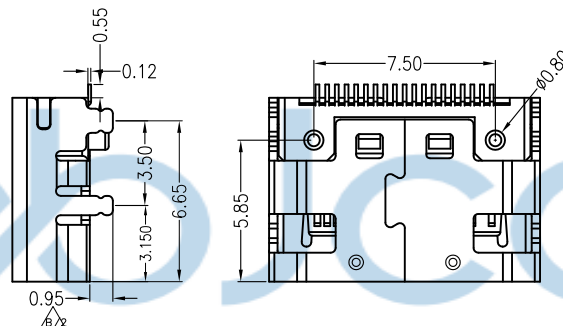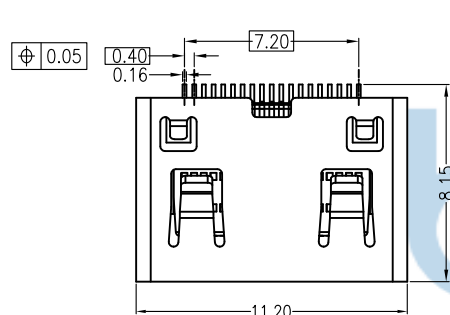



RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)




SECTION A-A

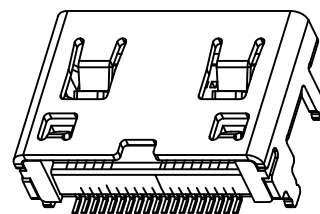

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: MINI HDMI 19P母座 板上四脚插带柱 L=7.60 平口 铜壳 (端子SMT)	
CHKD.	TSP	PJ. NO.: HD.02.51-24-H001 SIZE: A4 DRW NO.:	
PDWG.NO: 0423-2	DR.	LYX	FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


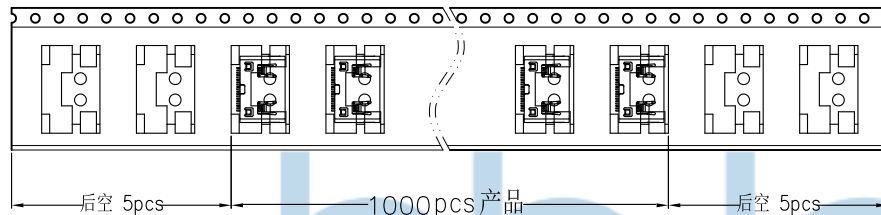
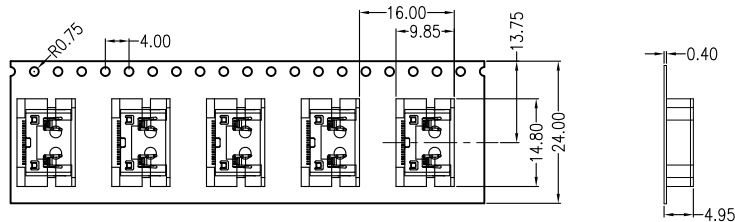


NO.1

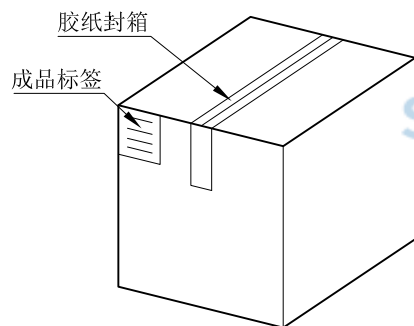

纸箱规格: 330*330*385

NO.4

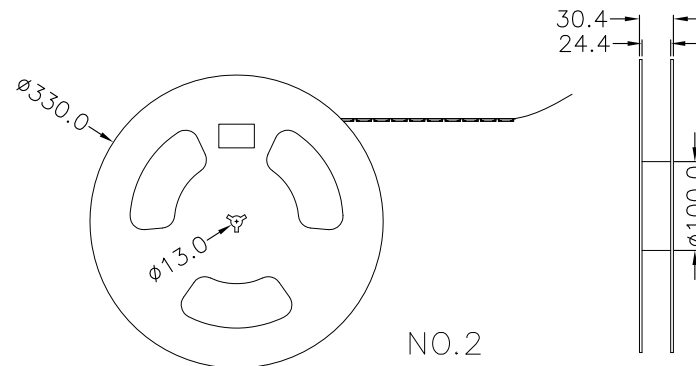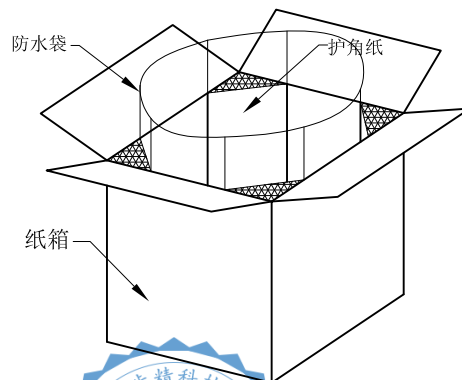

NO.2

1. 材质要求:

- 1.1 纸箱的材质要求为K=K; 外形尺寸为39*39*38.5CM;
- 1.2 卷盘的材质为PS; 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
- 1.3 卷带的材质为PS; 卷带的外形尺寸为12960*24*4.0mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留200MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的10盘(共计10Kset), 用防水袋包装内附干燥剂, 上下放纸板放入纸箱内, 整箱毛重为4.5KG;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

备注:

1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$	
APPD.		JM_Zheng	
CHKD.		TSP	
DR.		LYX	
PDWG.NO: 0423-2		NAME: MINI HDMI 19P母座 板上四脚插带柱 L=7.60 平口 铜壳(端子SMT)	
		PJ. NO.: HD.02.51-24-H001 SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	