

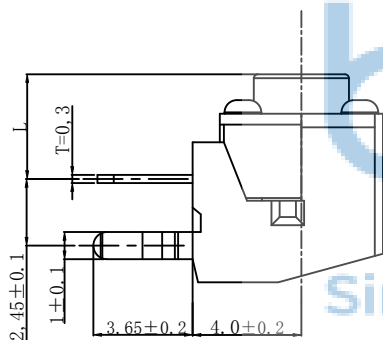

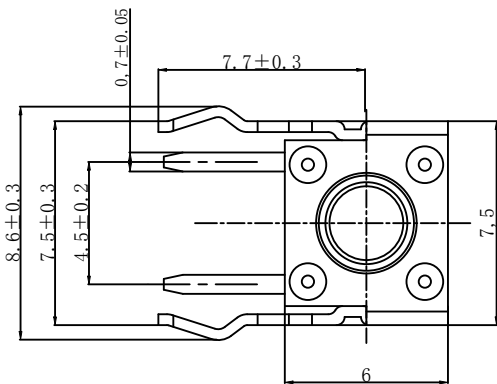


PCB参考图



电器原理图

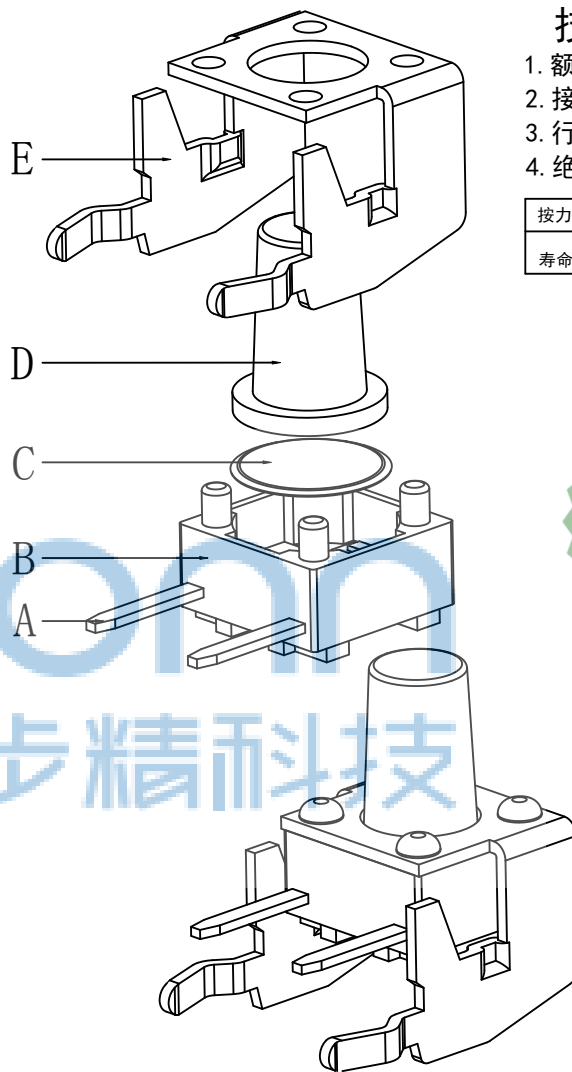

技术参数

- 额定电流: 50mA 12V DC
- 接触电阻: 100毫欧
- 行程: 0.3 ± 0.1 mm
- 绝缘电阻: 100兆欧

按力	160±30gf	260±50gf
寿命	10万次	10万次



H	L
4.5	3.35
5.0	3.85
5.5	4.35
6.0	4.85
6.5	5.35
7.0	5.85
7.5	6.35
8.0	6.85
8.5	7.35
9.0	7.85
9.5	8.35
10.0	8.85
10.5	9.35
11.0	9.85
11.5	10.35
12.0	10.85
12.5	11.35
13.0	11.85
13.5	12.35
14.0	12.85
14.5	13.35
15.0	13.85




E	盖子	黄铜	1	镀铜锡
D	按钮	PPA	1	清洗
C	簧片	不锈钢覆银	1	
B	基座	PPA 黑	1	清洗
A	卡件	黄铜	1	镀银
序号	名称	材料	数量	备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X*: ± 3 .X*: ± 2 .XX*: ± 1		NAME: 轻触开关 6x6x6.0 上支架 铜盖 不锈钢弹片 260gf 黑柄 盐雾24小时	
APPD.	JM_Zheng	PJ. NO.: 901-011-033002-Y0G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0415-1	DR.	TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2




深圳市步步精科技有限公司

PE袋规格: 260*185

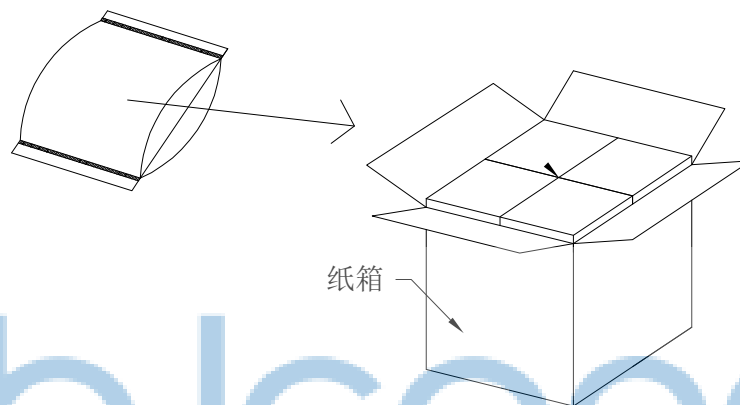

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38	X*: $\pm 3^{\circ}$	NAME: 轻触开关 6x6x6.0 上支架 铜盖 不锈钢弹片 260gf 黑柄 盐雾24小时	
.XX: ± 0.25	.X*: $\pm 2^{\circ}$	PJ. NO.: 901-011-033002-Y0G	
.XXX: ± 0.13	.XX*: $\pm 1^{\circ}$	SIZE: A4 DRW NO.:	
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0415-1	DR. TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2