

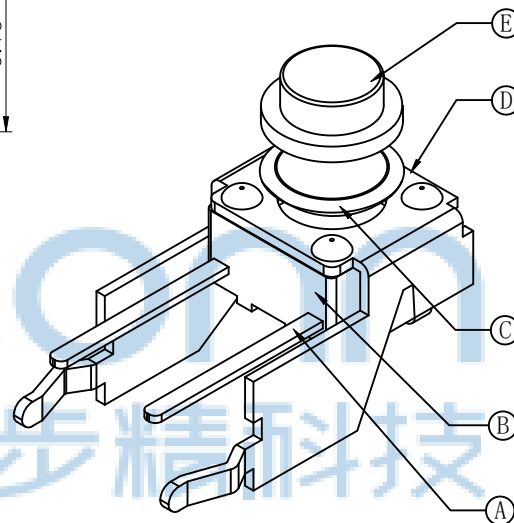


- 1、额定电流: DC 12V, 50mA Max
- 2、动作力: $160\pm 50\text{g}$
- 3、行程: $0.2\pm 0.1\text{mm}$
- 4、机械寿命: $\geq 100,000$ 次
- 5、未注尺寸公差按GB/T1804-m级精度要求



11.85	13.0	Ø3.0
8.35	9.5	Ø3.0
7.85	9.0	Ø3.0
7.35	8.5	Ø3.0
6.85	8.0	Ø3.2
6.35	7.5	Ø3.2
5.35	6.5	Ø3.2
4.85	6.0	Ø3.3
4.35	5.5	Ø3.3
3.85	5.0	Ø3.4
3.35	4.5	Ø3.5
高度L(mm)	帽头H(mm)	直径A(mm)

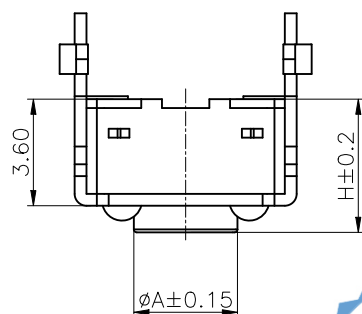

E	按钮	PPA黑	1	
D	支架	冷轧钢带	1	镀锡
C	簧片	不锈钢覆银	1	
B	基座	PPA黑	1	
A	卡件	黄铜	1	镀银
序号	名 称	材 料	数量	备注




PDWG NO: 0278-1



深圳市步步精科技有限公司

.X: ±0.38 X: ±3° .XX: ±0.25 .X: ±2° .XXX: ±0.13 .XX: ±1°		NAME: 轻触开关 6x6x6.5 半包定位支架 铁盖 160gf 袋装			
APPD	JM_Zheng		PJ NO: 901-012-163001-Y5G		
CHKD	LYX		SIZE:A4	DRW NO:	
DR	SGF		FINISH:SEE NOTES		MAT'L:SEE NOTES
			SCALE:N/A	REV:A0	UNIT:mm PAGE:1/2

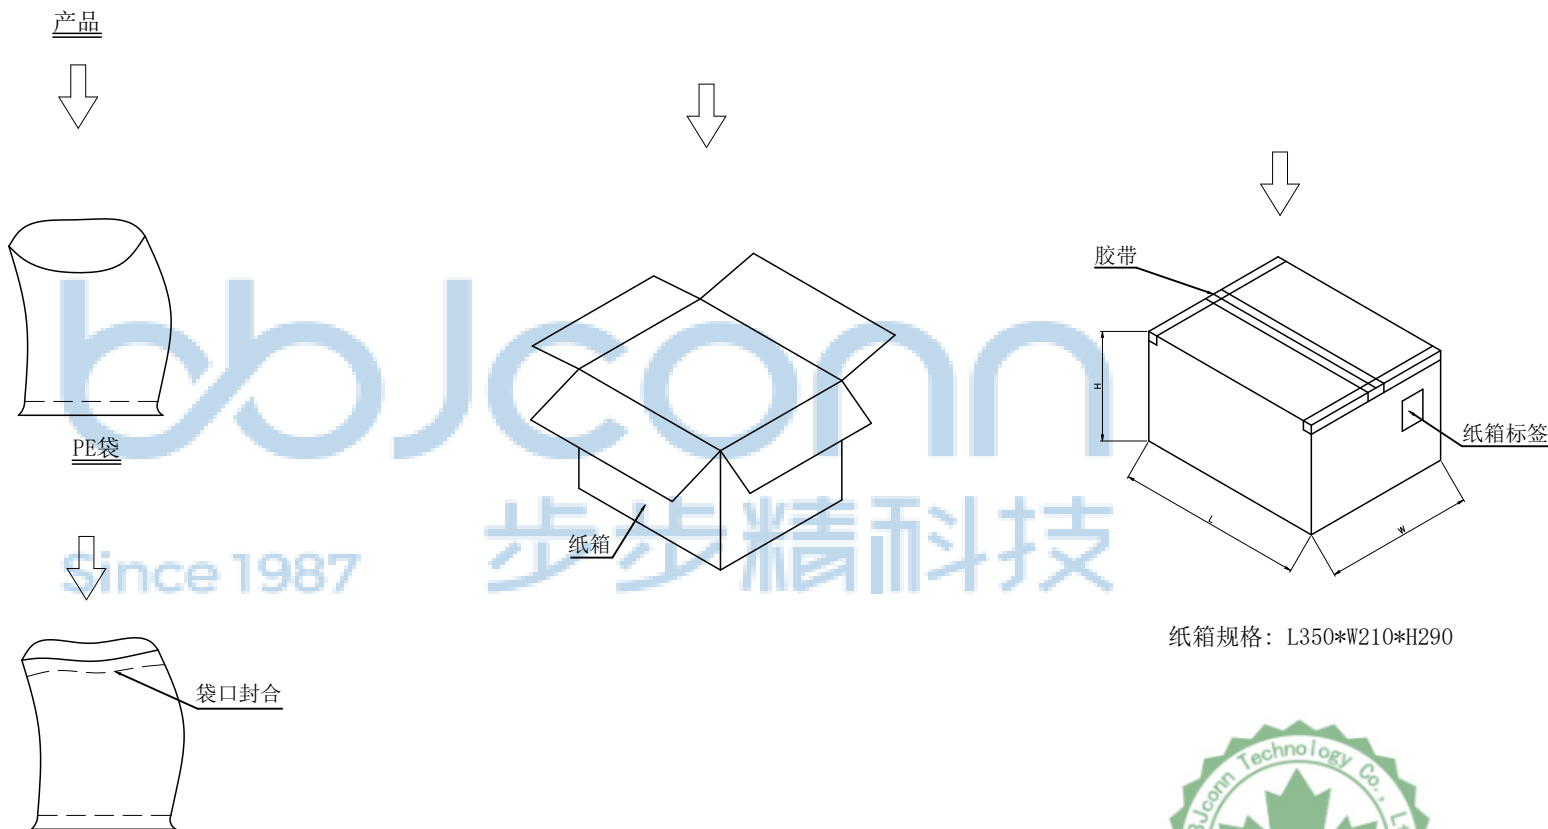

- 1、包装要求:
- 1.1 PE袋包装1000pcs;
 - 1.2 每10袋放一个纸箱, 共计10000pcs;
 - 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0278-1		深圳市步步精科技有限公司			
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 轻触开关 6x6x6.5 半包定位支架 铁盖 160gf 袋装	
		APPD	JM_Zheng	⊙	PJ NO: 901-012-163001-Y5G
		CHKD	LYX	SIZE:A4	DRW NO:
		DR	SGF	FINISH:SEE NOTES	MAT'L:SEE NOTES
				SCALE:N/A	REV:A0
				UNIT:mm	PAGE:2/2