


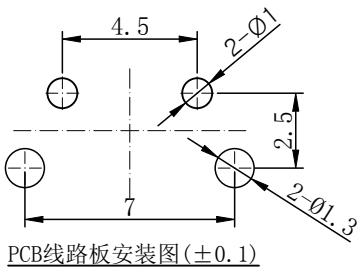
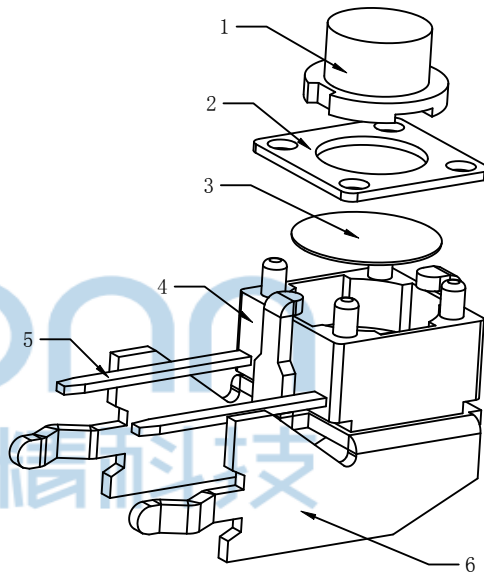


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

- 技术参数:
1. 使用温度: -25~+85℃;
 2. 额定负荷: DC 12V 50mA;
 3. 接触电阻: $\leq 50\text{m}\Omega$;
 4. 绝缘电阻: $\geq 100\text{M}\Omega$;
 5. 耐压: AC250V (50Hz)/min;
 6. 动作力: $260\pm 50\text{g}$;
 7. 使用寿命: 100000次;
 8. 未注尺寸公差参照下面表格。

11.85	13.0	Ø3.0
8.35	9.5	Ø3.0
7.85	9.0	Ø3.0
7.35	8.5	Ø3.0
6.85	8.0	Ø3.2
6.35	7.5	Ø3.2
5.35	6.5	Ø3.2
4.85	6.0	Ø3.3
4.35	5.5	Ø3.3
3.85	5.0	Ø3.4
3.35	4.5	Ø3.5
高度L (mm)	帽头H (mm)	直径A (mm)

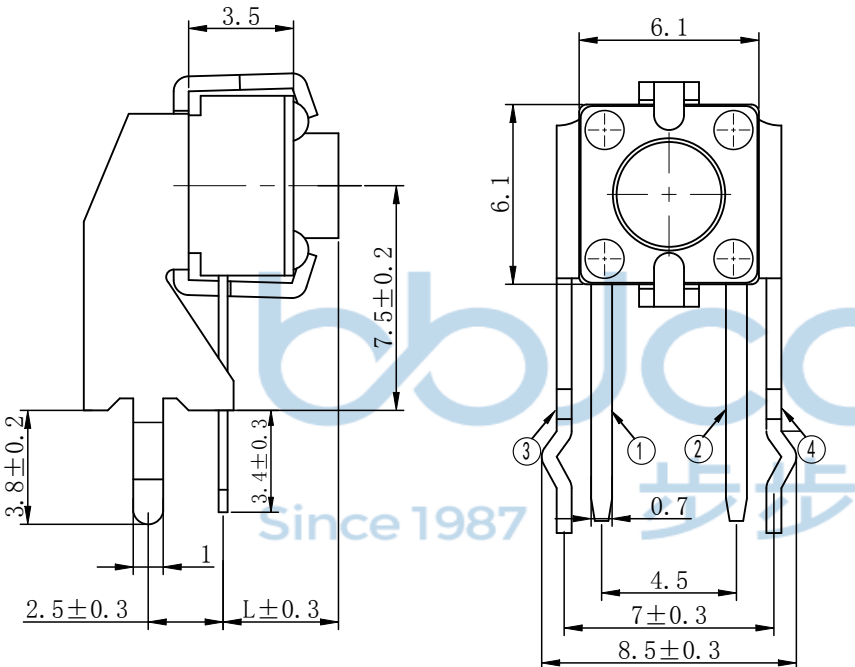

电路图

6	机架	1	冷轧钢带	镀铜锡 0.1mm
5	嵌件	1	H62Y 黄铜	镀银0.2mm
4	底座	1	PPA	黑色
3	簧片	1	不锈钢	镀银0.2mm
2	盖板	1	冷轧钢带	镀铜锡 0.1mm
1	按钮	1	PPA	黑色
序号	名称	数量	材料	镀层/颜色



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0278-1

深圳市步步精科技有限公司

NAME: 轻触开关 6x6x5.0 飞机架 不锈钢弹片 260gf 袋装

PJ NO:901-011-113001-Y5G

SIZE:A4

DRW NO:

FINISH:SEE NOTES

MAT'L:SEE NOTES

SCALE:N/A

REV:A0

UNIT:mm

PAGE:1/2


APPD: JM_Zheng

CHKD: Tang


DR: LYX

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格: 260*185

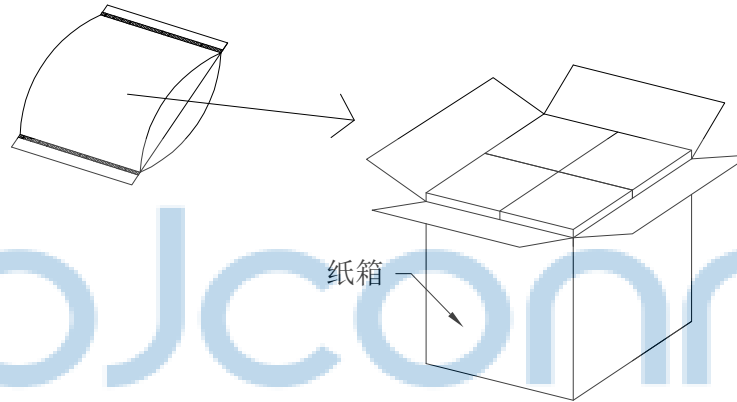

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 轻触开关 6x6X5.0 飞机架 不锈钢弹片 260gf 袋装	
APPD.	JM_Zheng	PJ. NO.: 901-011-113001-Y5G	
CHKD.	Tang	SIZE: A4 DRW NO.:	
PDWG.NO:	0278-1	FINISH: SEE NOTES	MAT'L.: SEE NOTES
	DR.	LYX	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2