


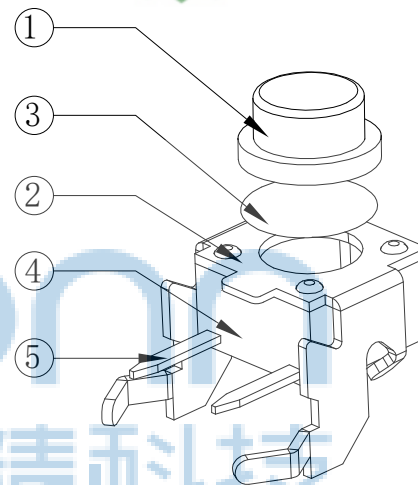


1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操作力: $160 \pm 30\text{gf}$
4. 行程: $0.20 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 500,000 Cycles

PCB. 安装图

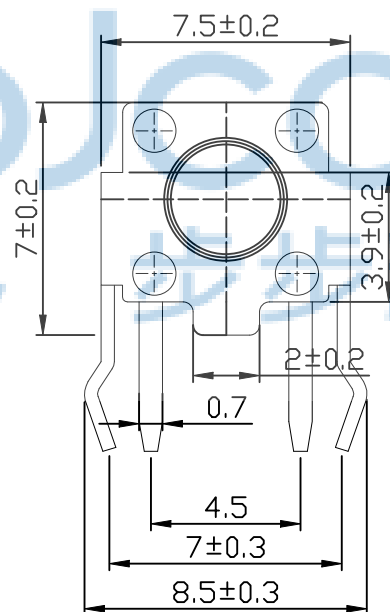

电路图

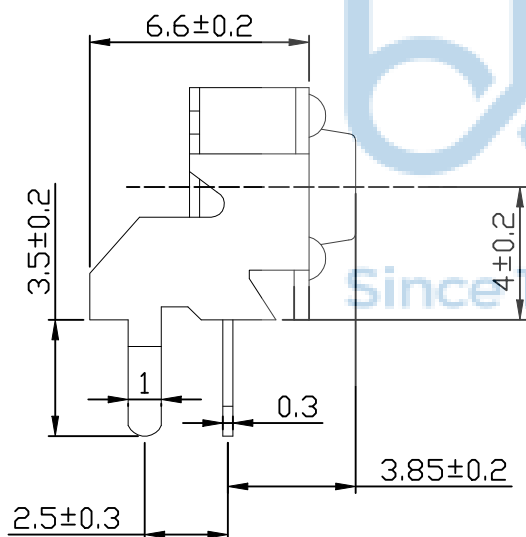

13.85	15.0	ø3.0
11.85	13.0	ø3.0
8.35	9.5	ø3.1
7.85	9.0	ø3.2
7.35	8.5	ø3.2
6.35	7.5	ø3.3
5.35	6.5	ø3.3
4.85	6.0	ø3.3
3.85	5.0	ø3.5
3.15	4.3	ø3.5
长度L(mm)	高度H(mm)	直径A(mm)

5	引脚、触点	黄铜	1	镀银
4	基座	PPA	1	耐温280℃（黑色）
3	簧片	不锈钢	1	不锈钢
2	支架	冷轧钢	1	镀锡
1	按钮	PPA	1	耐温280℃（黑色）
序号	零件名称	材料规格	数量	备注



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0278-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME:	轻触开关 6x6x5.0 半包定位支架 不锈钢弹片 160gf 袋装
-------	---------------------------------------

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 901-012-033001-Y5G
---	-----------------------------


CHKD. LYX

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


DR.	SGF
-----	-----

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

PE袋规格: 260*185

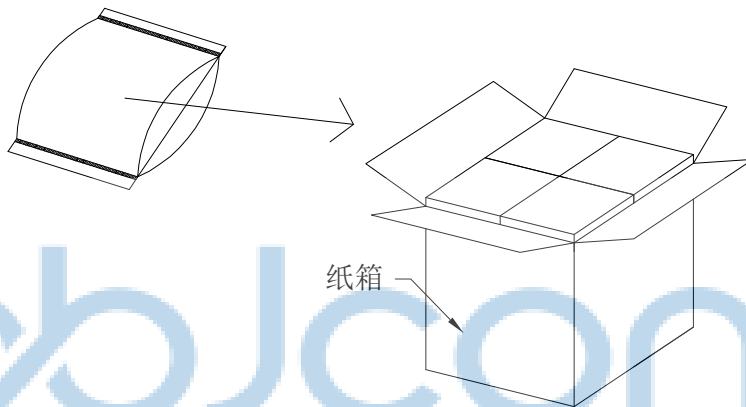

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME: 轻触开关 6x6x5.0 半包定位支架
不锈钢弹片 160gf 袋装

APPD. JM_Zheng

PJ. NO.: 901-012-033001-Y5G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2