






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

主要技术规格:

1. 额 定 值: 50mA DC12V
2. 接触电阻: $\leq 100\text{m}\Omega$
3. 动作力: $260 \pm 50\text{gf}$
4. 绝缘电阻: $\geq 100\text{M}\Omega$
5. 抗电强度: 250V 50HZ 1Min.

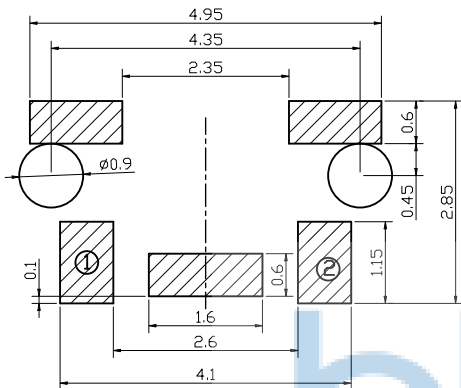

安装参考图

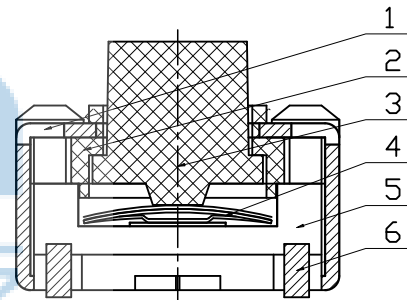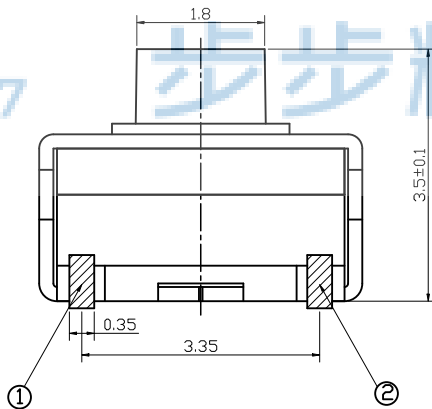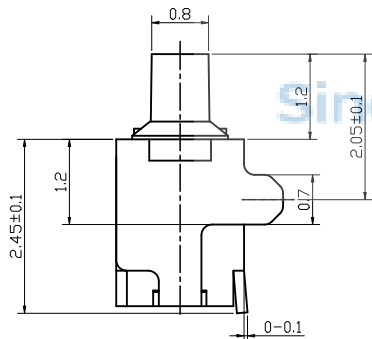





原理图



序号	产品名称	材料规格	表面处理 颜色	数量
1	盖板	黄铜0.2	镀银	1
2	塑料盖板	LCP 白		1
3	按钮	LCP 黑		1
4	簧片	进口不锈钢覆银	外购	2
5	底座	LCP 黑		1
6	卡件	磷铜0.15	镀银	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X': $\pm 2'$ XX': $\pm 1'$	NAME: 轻触开关 2x4x3.5 侧按支架 不锈钢 弹片 双层防松香水 260GF 编带	
APPD.	JM_Zheng	PJ. NO.: 901-061-043001-Y5G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

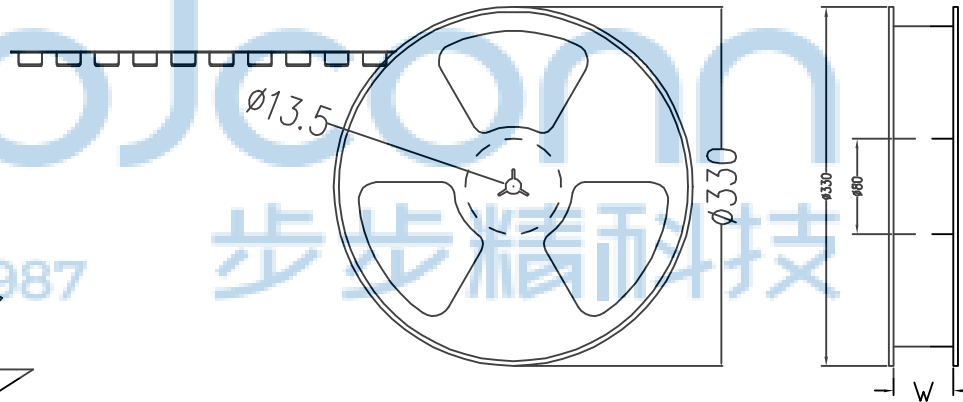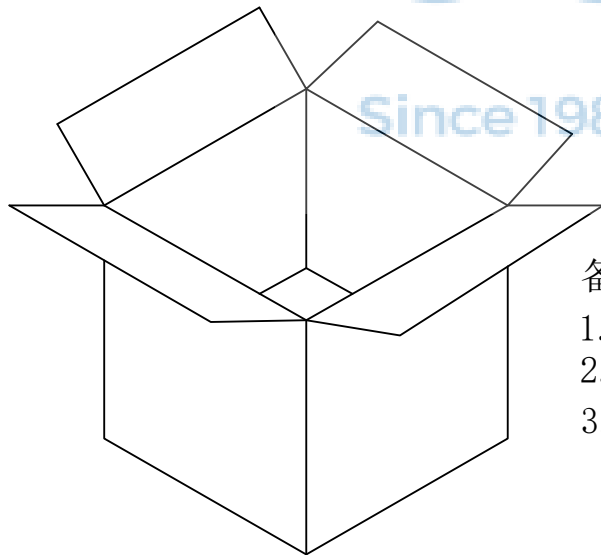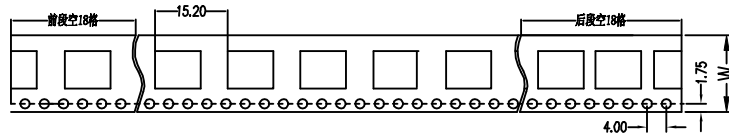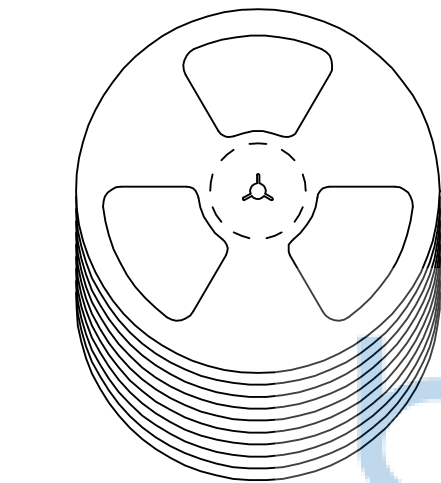

备注:

1. 包装数量: 3000/PCS/卷, 20卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 轻触开关 2x4x3.5 侧按支架 不锈钢 弹片 双层防松香水 260GF 编带	
.X': $\pm 3'$.X'': $\pm 2'$.X'X': $\pm 1'$		PJ. NO.: 901-061-043001-Y5G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
PDWG.NO: 0278-1		MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A	
		REV.: A0	
		UNIT: mm	
		PAGE: 2/2	