
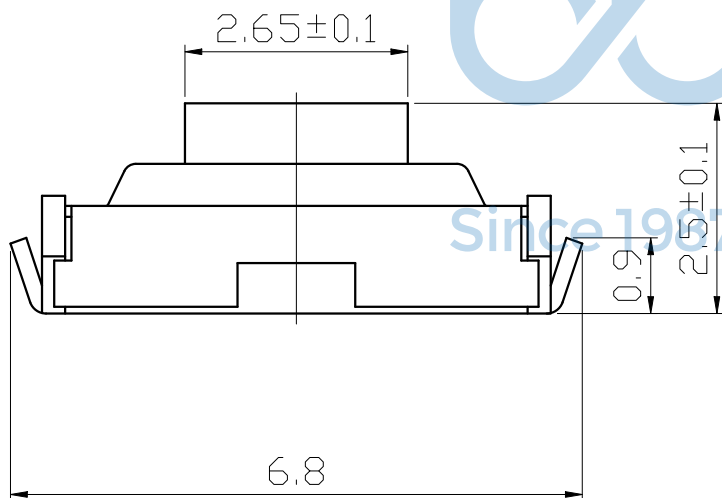





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

技术要求:

1. 零部件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
2. 额定电流: 50mA. 12V DC, 绝缘电阻100MΩ min, 100V DC, 介电强度250V AC for 1min, 接触电阻100mΩ max。
3. 开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。

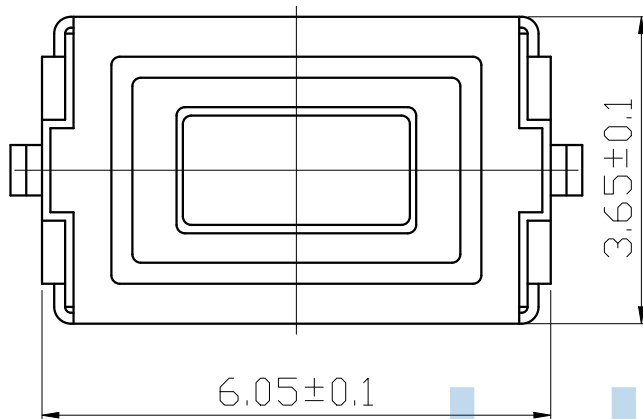

安装参考图



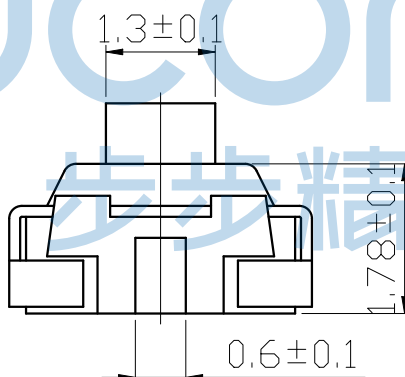
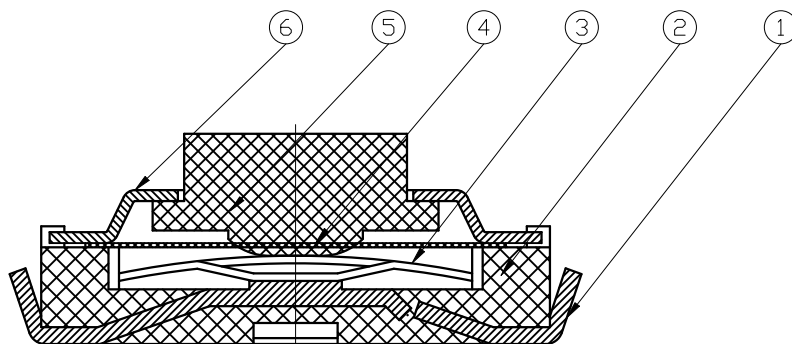


序号	名称	材料	数量	备注
6	盖板	不锈钢0.13	1	酸洗
5	按钮	PPA 白	1	
4	防水胶	0.05 黄胶	1	
3	簧片	进口不锈钢覆银	1	
2	底座	LCP 黑	1	
1	卡件	黄铜0.2T	1	镀银

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0278-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° .X*: ±2° .XX*: ±1°
NAME:	轻触开关 3x6x2.5 U型 两脚贴片 不锈钢弹片 260GF
APPD. JM_Zheng	PJ. NO.: 901-111-013001-Y5G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

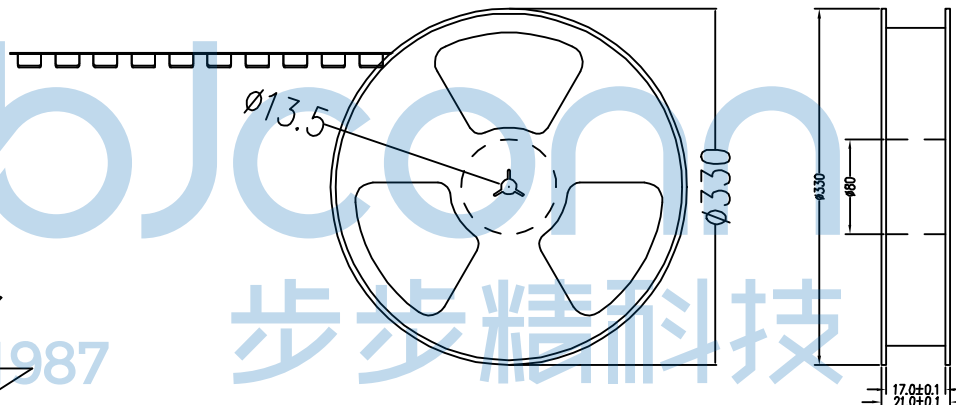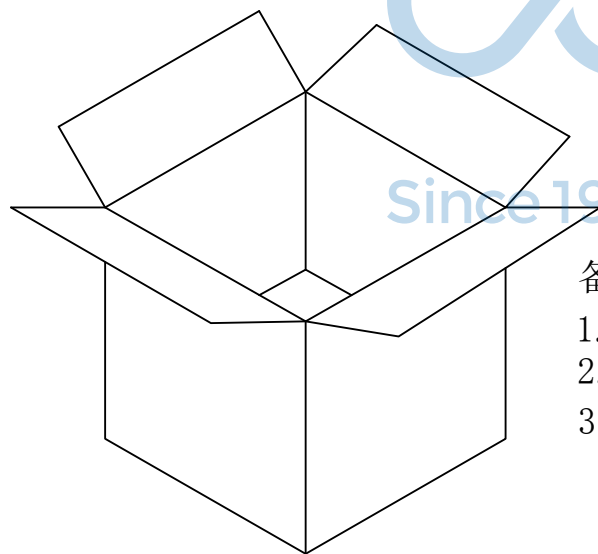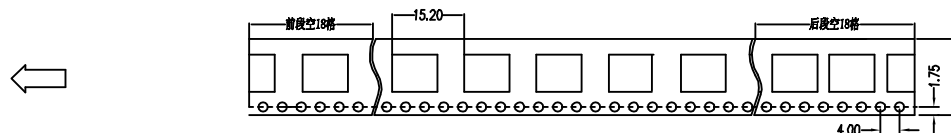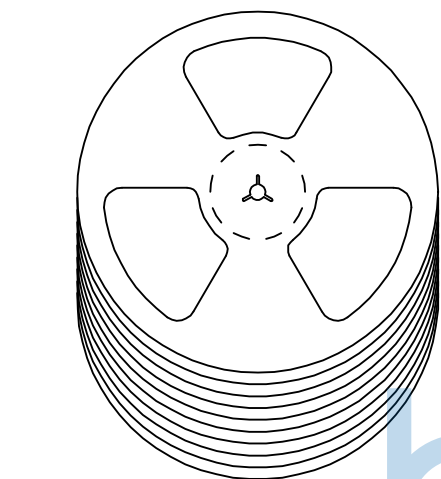

备注:

1. 包装数量：3000/PCS/卷，10卷/箱。
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
载体：聚丙烯（PS），
上带：聚乙烯（PET），
卷盘：聚苯乙烯。

纸箱规格：345*345*230MM

纸箱规格：345*345*350MM

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG:NO: 0278-1

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

APPD.	JM_Zheng
-------	----------

CHKD.	LYX
-------	-----

DR.	TSP
-----	-----

NAME:
轻触开关 3x6x2.5 U型 两脚贴片 不锈钢弹片 260GF

	PJ. NO.: 901-111-013001-Y5G	
---	-----------------------------	--

	SIZE: A4	DRW NO.:
	FINISH: SEE NOTES	MAT: SEE NOTES

FINISH: SEE NOTES		MATERIAL: SEE NOTES	
SCALE: N/A	REV: A0	UNIT: mm	PAGE: 2/2