


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

主要技术性能

- 1.使用温度范围：-25~+85℃
- 2.额定负荷：DC12V0.1A
- 3.接触电阻： $\leq 0.03\ \Omega$
- 4.绝缘电阻： $\geq 100M\ \Omega$
- 5.耐压：AC 250V(50HZ)/min
- 6.动作力：260/160g ± 50 g
- 7.寿命：100000次



按点示意图

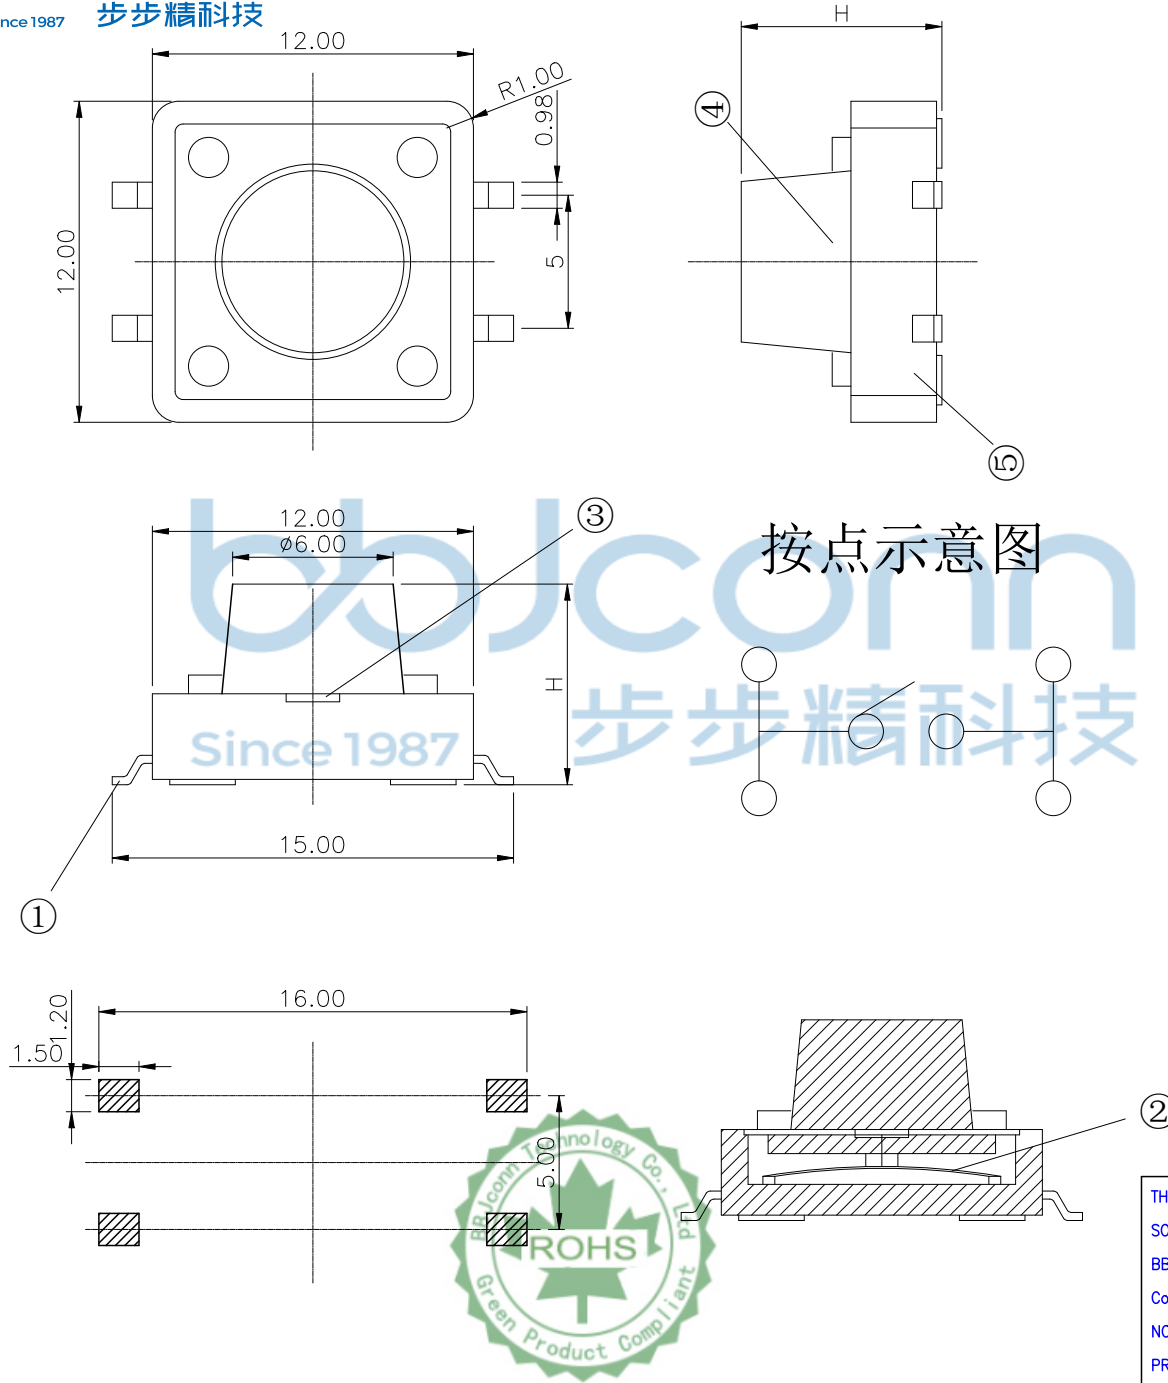

5	基座	1	PPA	(黑)
4	按钮	1	PPA	(黑)
3	盖板	1	冷轧钢	铜锡
2	接触簧片	1	覆银	银
1	接触脚	1	黄铜带	银
序号	名 称	数量	材 料	镀 涂

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0278-1

深圳市步步精科技有限公司

NAME: 轻触开关12x12X7.5 四脚贴片 160g

PJ NO: 901-142-013001-Y5G

SIZE:A4

DRW NO:

FINISH:SEE NOTES

MAT'L:SEE NOTES

SCALE:N/A

REV:A0

UNIT:mm


PAGE:1/1

APPD JM_Zheng

CHKD Tang

DR LYX

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

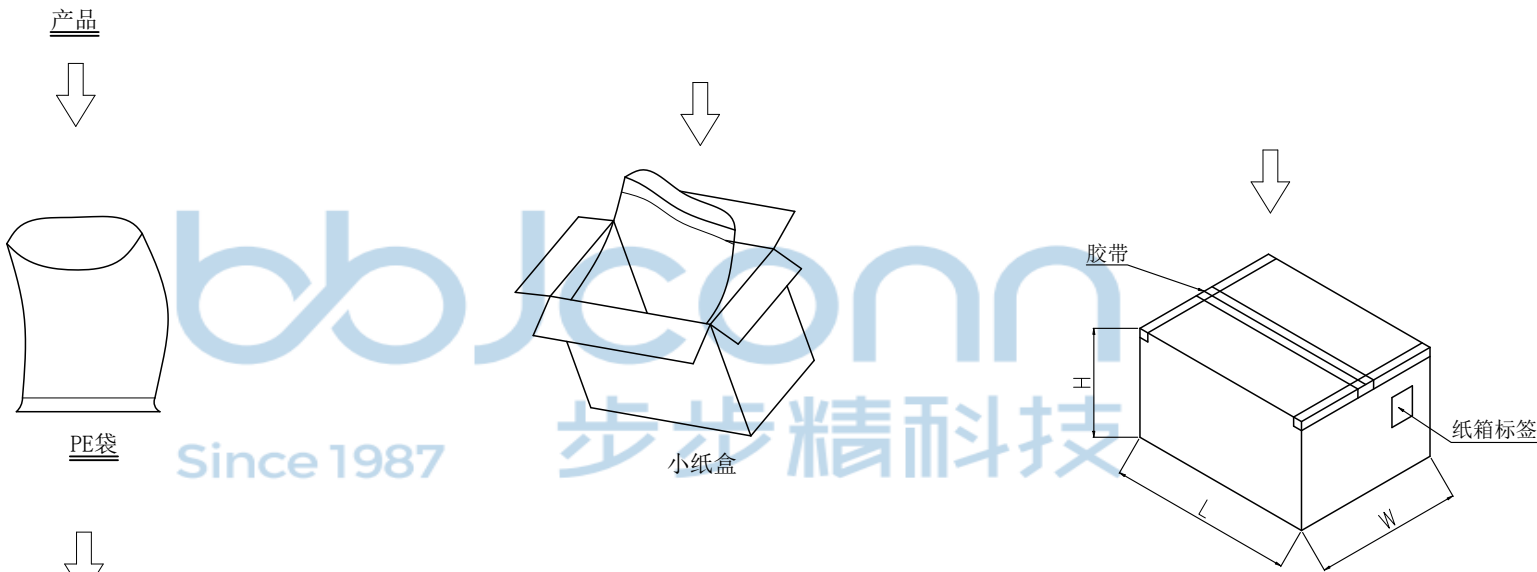

纸箱规格: L350*W210*H290



- 1、包装要求:
- 1.1 PE袋包装500pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
 - 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 轻触开关12x12X7.5 四脚贴片 160g	
X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 901-142-013001-Y5G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. Tang		FINISH: SEE NOTES	
DR. LYX		MAT'L.: SEE NOTES	
PDWG.NO: 0278-1		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2