



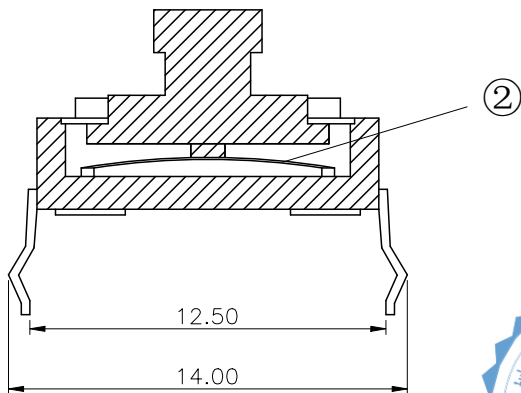


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

主要技术性能

1. 使用温度范围: $-25\sim+85^{\circ}\text{C}$
2. 额定负荷: DC12V0.1A
3. 接触电阻: $\leq 0.03\Omega$
4. 绝缘电阻: $\geq 100\text{M}\Omega$
5. 耐压: AC 250V (50HZ)/min
6. 动作力: $260/160\text{g}\pm 30\text{g}$
7. 寿命: 100000次

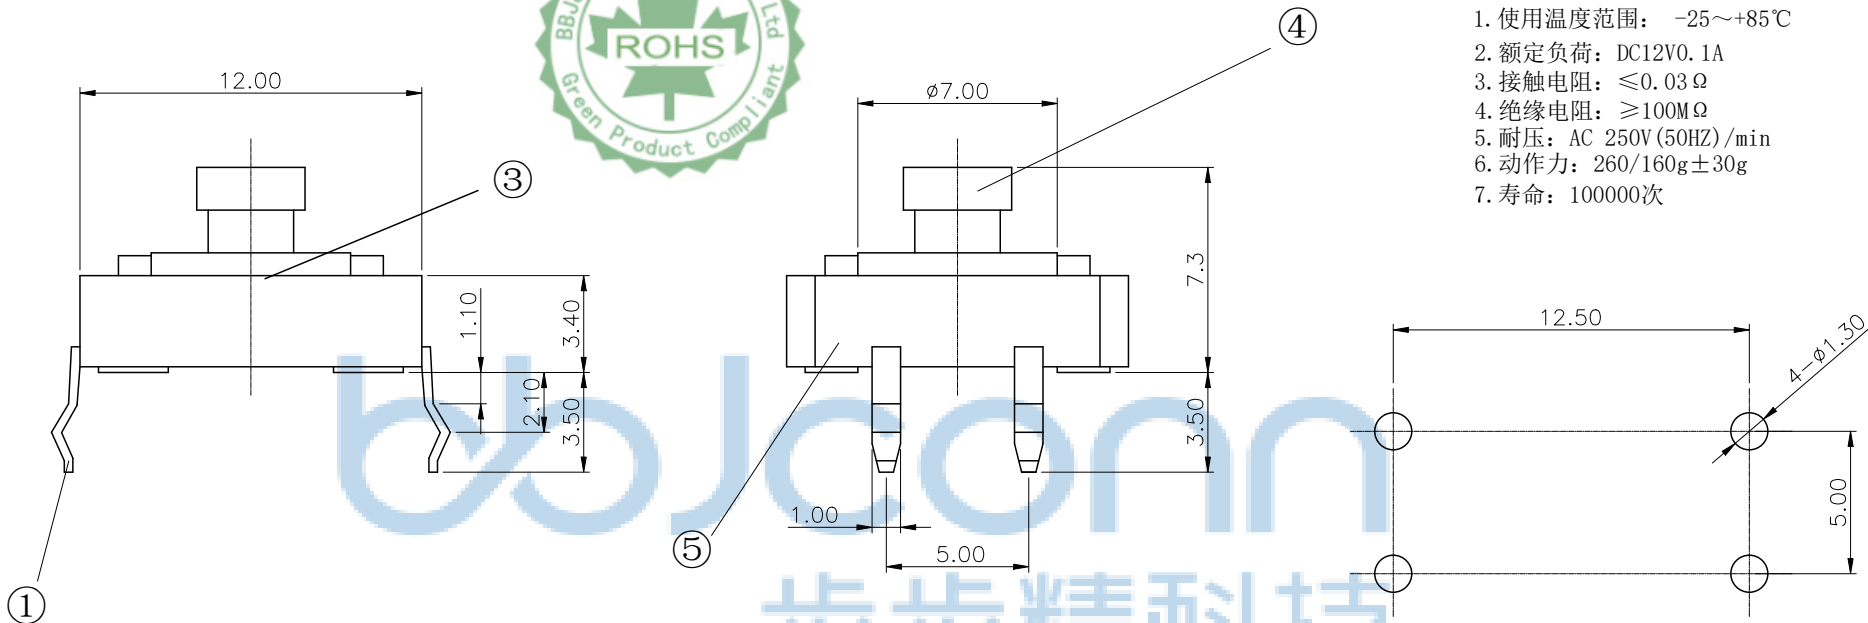

按点示意图

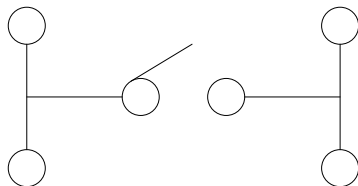

5	基座	1	PPA	(黑)
4	按钮	1	PPA	(黄)
3	盖板	1	冷轧钢	铜锡
2	接触簧片	1	不锈钢	银
1	接触脚	1	黄铜带	银
序号	名 称	数量	材 料	镀 涂



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0278-1

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

NAME: 轻触开关 12x12x7.3 方头 黄柄
四脚弯插 260gf 袋装


PJ NO: 901-151-023002-Y5G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

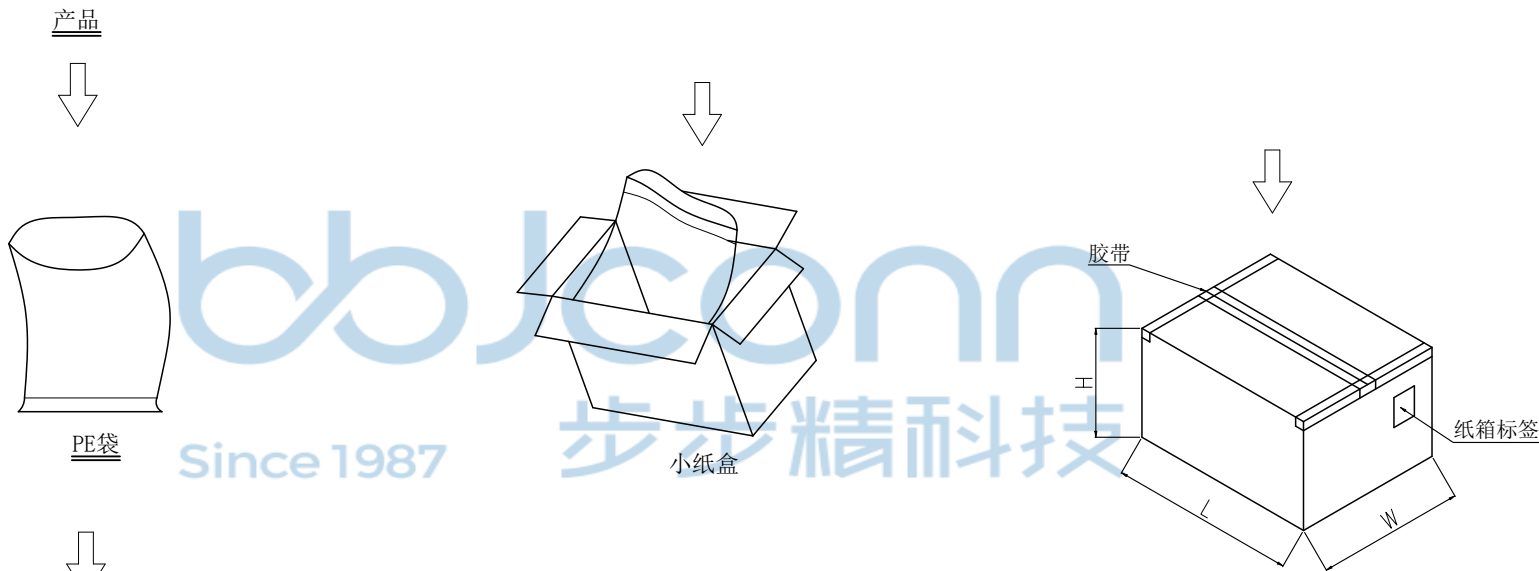

- 1、包装要求:
- 1.1 PE袋包装500pcs;
 - 1.2 每2袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 轻触开关 12x12x7.3 方头 黄柄 四脚弯插 260gf 袋装	
APPD.	JM_Zheng	PJ. NO.: 901-151-023002-Y5G	
CHKD.	Tang	SIZE: A4 DRW NO.:	
PDWG,NO:		FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR.		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2