



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

技术要求:

1. 零部件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
2. 额定电流: 50mA. 12V DC, 绝缘电阻100M Ω min, 100V DC, 介电强度250V AC for 1min, 接触电阻100m Ω max。
3. 开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。





H	
3.1	3.5
4.3	4.5
5.0	

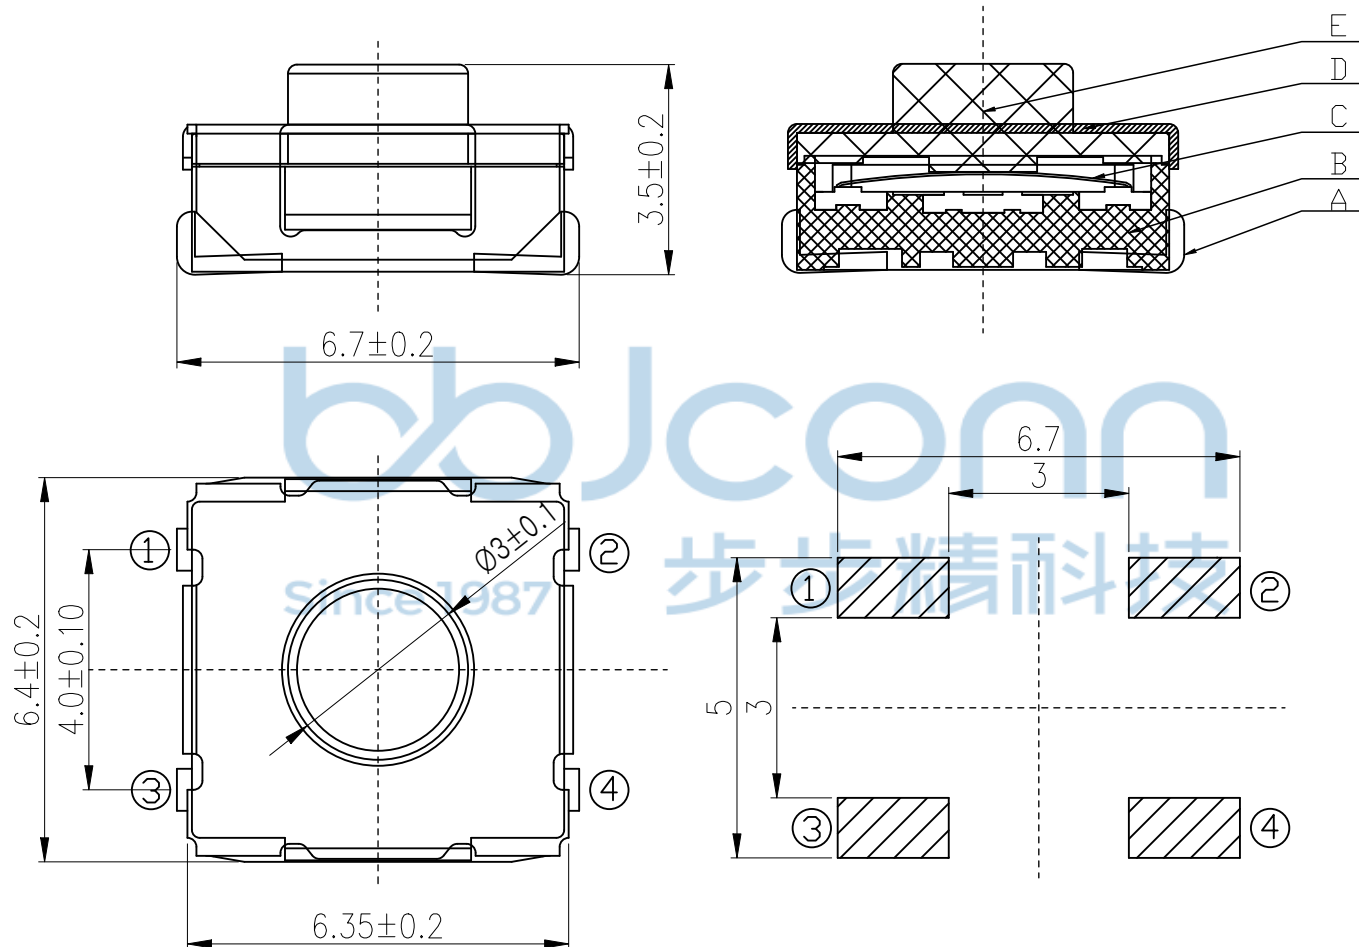

序号	名称	材料	数量	备注
E	按钮	硅胶	1	蓝色
D	盖板	不锈钢	1	清洗
C	簧片	不锈钢覆银	1	外购
B	底座	PPA 黑	1	
A	卡件	黄铜0.3Y	1	镀银

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

JB 深圳市步步精科技有限公司		NAME: 轻触开关 6.2x6.2x3.5 U型 (包脚) 蓝色硅胶按钮 160gf	
APPD.	JM_Zheng		PJ. NO.: 901-182-013001-Y5G
CHKD.	TSP		SIZE: A4 DRW NO.:
DR.	LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

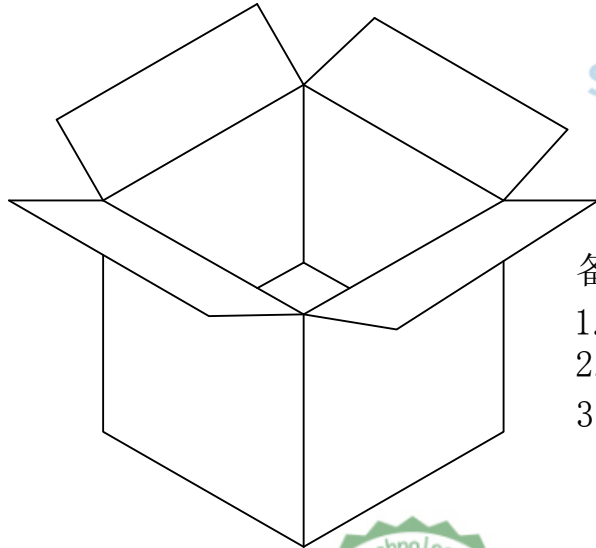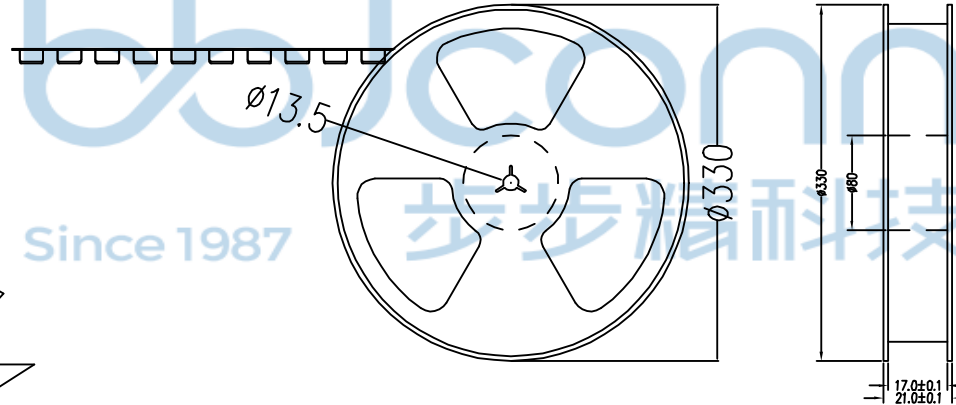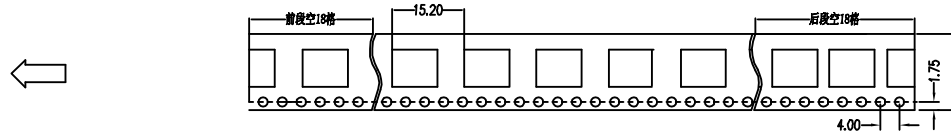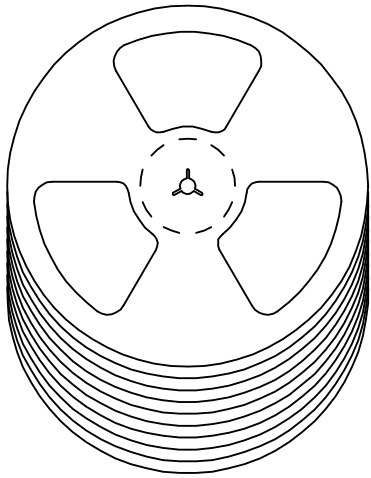

备注:

- 包装数量: 1500/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 轻触开关 6.2x6.2x3.5 U型 (包脚) 蓝色硅胶按钮 160gf	
PJ. NO.: 901-182-013001-Y5G	SIZE: A4	DRW NO.:	FINISH: SEE NOTES	MAT'L.: SEE NOTES	SCALE: N/A
REV.: A0	UNIT: mm	PAGE: 2/2	DR. LYX	CHKD. TSP	APPD. JM_Zheng
PDWG.NO: 0278-1	DR. LYX	CHKD. TSP	APPD. JM_Zheng	FINISH: SEE NOTES	MAT'L.: SEE NOTES