
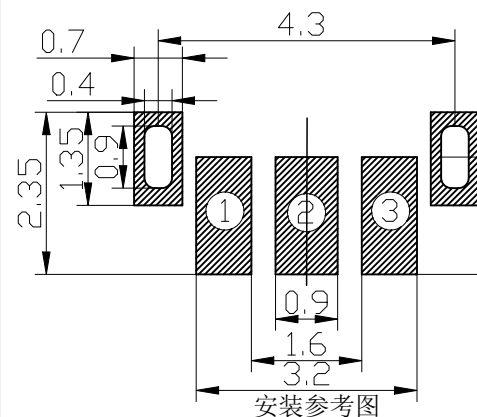
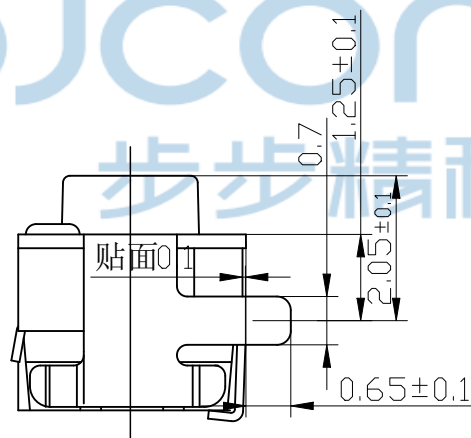
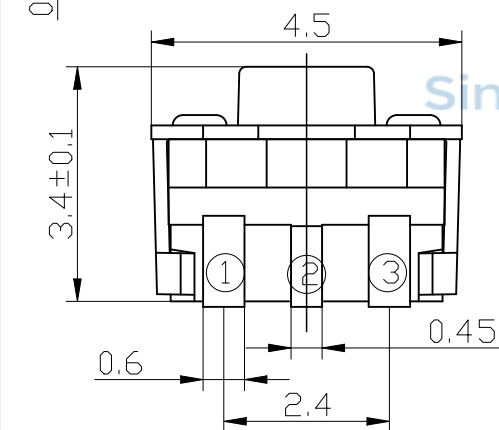
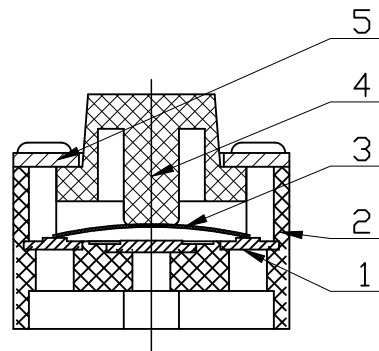


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

技术要求:





1. 零部件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
2. 额定电流: 50mA. 12V DC, 绝缘电阻100MΩ min, 100V DC, 介电强度250V AC for 1min, 接触电阻 100mΩ max。操作温度-30° +70°。260° 高温后衰变值在初始值的20%内;
3. 开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。
4. 行程: 0.2mm
5. 按力: 160/260gf ± 50gf

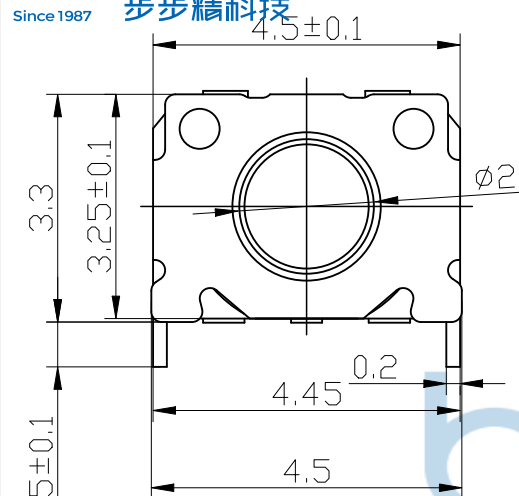

5	盖板	磷铜0.2	1	镀银
4	按钮	LCP 白	1	
3	簧片	进口不锈钢覆银	1	
2	底座	LCP 黑	1	
1	卡件	磷铜0.12	1	镀银
序号	名称	材料	数量	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

深圳市步步精科技有限公司		NAME: 轻触开关 4x5x3.5 侧按 笑脸开关 五脚贴片 260gf 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° .X*: ±2° .XX*: ±1°	APPD. JM_Zheng CHKD. YAN DR. LYX	PJ. NO.: 901-341-043001-Y5G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

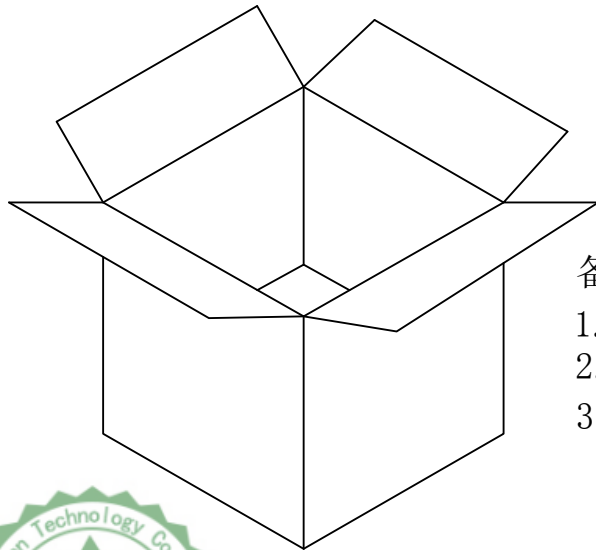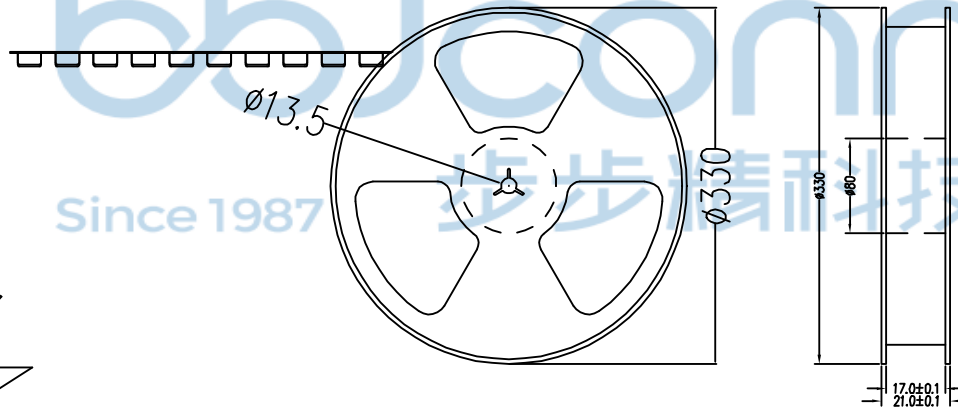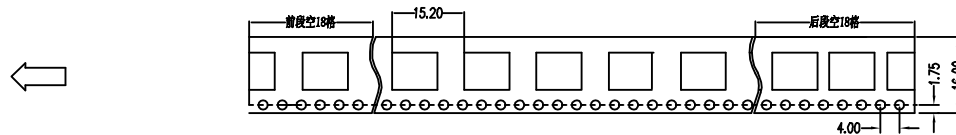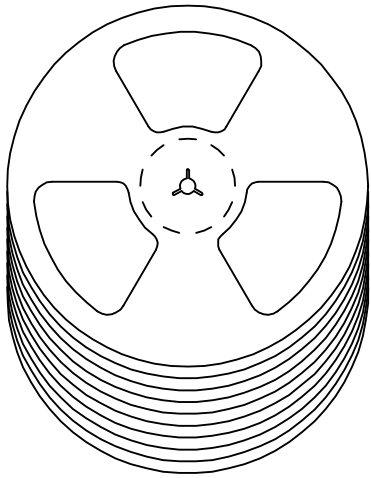

备注:

1. 包装数量: 2000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230M

纸箱规格: 345*345*350M



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0278-1			深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: 轻触开关 4x5x3.5 侧按 笑脸开关 五脚贴片 260gf 编带	
	APPD.	JM_Zheng			PJ. NO.: 901-341-043001-Y5G	
	CHKD.	YAN			SIZE: A4 DRW NO.:	
			FINISH: SEE NOTES		MAT'L.: SEE NOTES	
	DR. LYX		SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2/2