

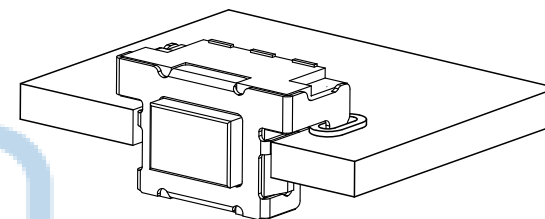
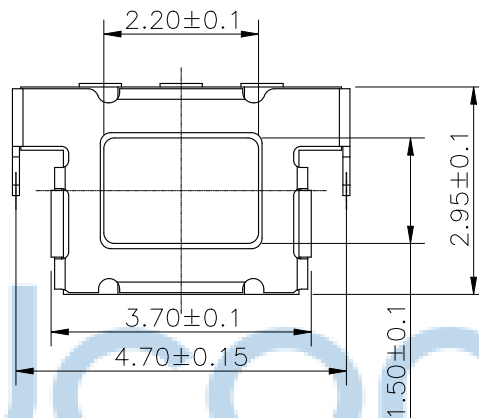



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数


1. 额定电流:50mA 12V DC
2. 接触电阻: $\leq 100m\Omega$
3. 按力: $260\pm 50gf$
4. 行程: $0.2\pm 0.1mm$
5. 绝缘电阻: $>100M\Omega$
6. 抗电强度:AC 250V 50Hz 1Min
7. 寿命:100,000 cyc

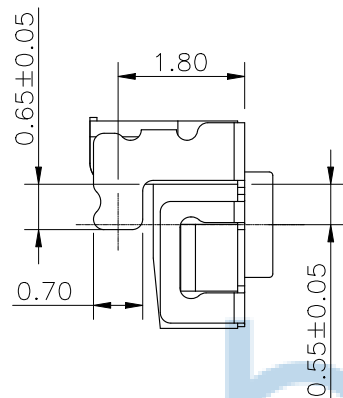

CIRCUIT DIAGRAM

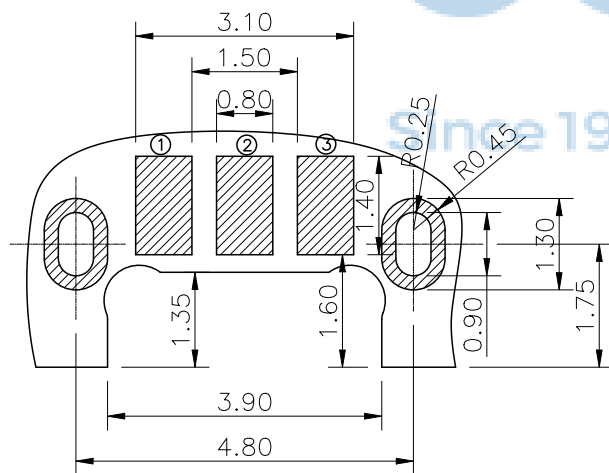

P.C.B MOUNTING PATTERN DIMENSION
the following soldering are recommended
for reflow soldering

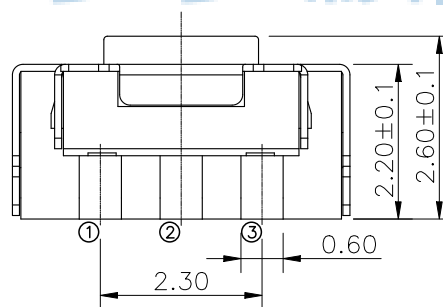

6	盖板	磷铜0.15	1	镀银
5	按钮	LCP黑	1	
4	防水膜	0.05	1	
3	簧片	进口不锈钢覆银	1	
2	底座	LCP黑	1	
1	卡件	磷铜0.2	1	镀银
序号	名称	材料	数量	备注



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0278-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF





NAME: 轻触开关 3x4x2.6 侧按支架 两脚插 沉板
2.05 不锈钢弹片 LCP黑柄 260GF 编带

PJ NO: 901-371-053001-Y5G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

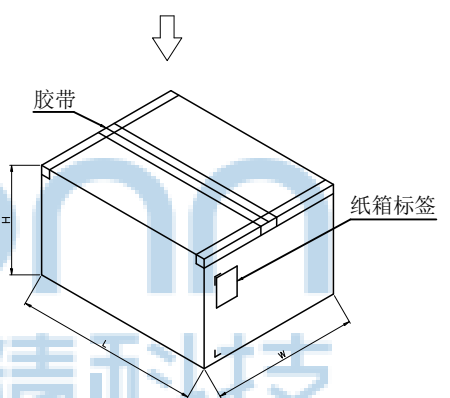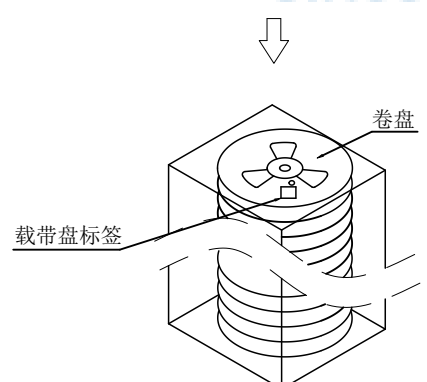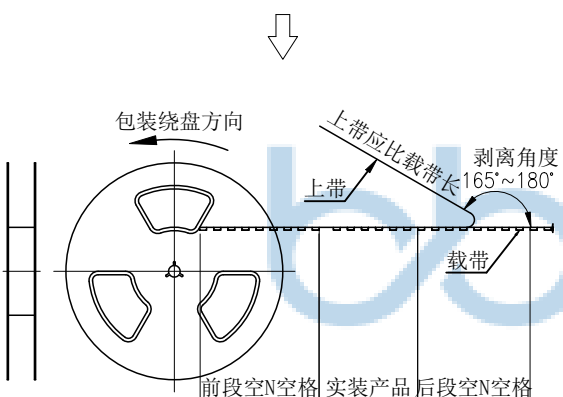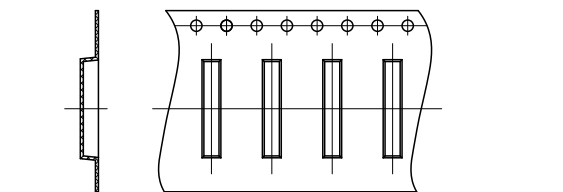

纸箱规格: W345*L345*H230MM



- 备注:
- 1、包装数量: 2500/PCS/卷, 10卷/箱。
 - 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
 - 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$
APPD	JM_Zheng	NAME: 轻触开关 3x4x2.6 侧按支架 两脚插 沉板 2.05 不锈钢弹片 LCP黑柄 260GF 编带	
CHKD	LYX	PJ NO: 901-371-053001-Y5G	
PDWG NO: 0278-1		SCALE:N/A	REV:A0
		UNIT:mm	PAGE:2/2