






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

P. C. B MOUNTING PATTERN DIMENSION


the following soldering are recommended
for reflow soldering

技术参数

NO	项 目	参 数
1	额定电流	50mA 12V DC
2	接触电阻	≤100mΩ
3	按 力	160±50gf
4	行 程	0.2±0.1mm
5	绝缘电阻	> 100MΩ
6	抗电强度	AC 250V 50Hz 1Min
7	寿 命	100,000 cyc

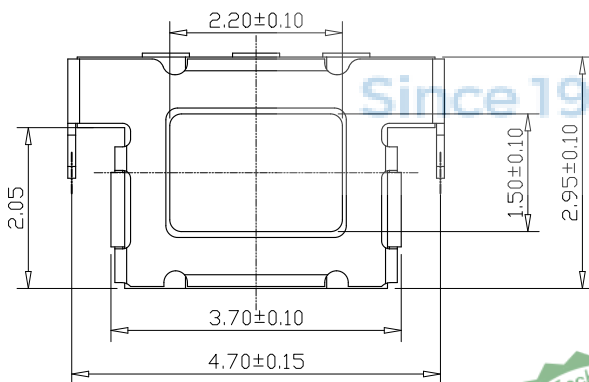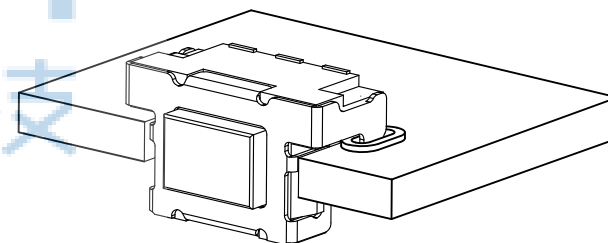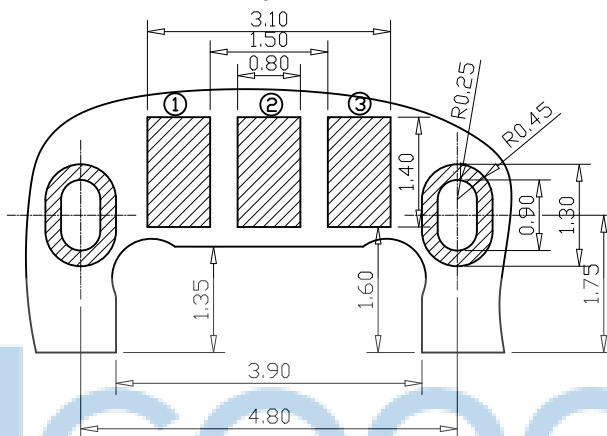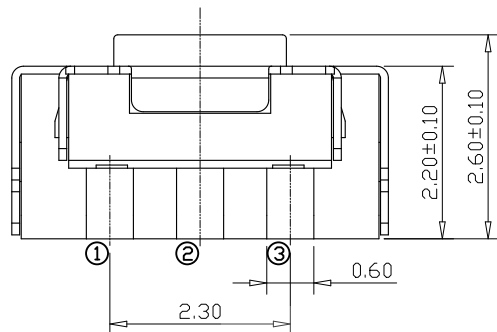

CIRCUIT DIAGRAM



6	盖板	磷铜0.15	1	镀银
5	按钮	LCP白	1	
4	防水膜	0.05	1	
3	簧片	进口不锈钢覆银	1	
2	底座	LCP黑	1	
1	卡件	磷铜0.2	1	镀银
序号	名称	材料	数量	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'
NAME: 轻触开关 3x4x2.6 侧按支架 两脚插 沉板2.05 不锈钢弹片 LCP白 160GF 编带	PJ. NO.: 901-372-053001-Y5G
APPD. JM_Zheng	SIZE: A4 DRW NO.:
CHKD. LYX	FINISH: SEE NOTES MAT'L: SEE NOTES
DR. SGF	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



备注:

- 包装数量: 2500/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 轻触开关 3x4x2.6 侧按支架 两脚插 沉板2.05 不锈钢弹片 LCP白 160GF 编带	
				P.J. NO.: 901-372-053001-Y5G	
PDWG.NO: 0278-1		APPD.	JM_Zheng	SIZE: A4 DRW NO.:	
		CHKD.	LYX	FINISH: SEE NOTES MAT'L: SEE NOTES	
		DR.	SGF	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	