

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

1、CHARACTERISTICS

Model


Operating Force 220±70(gf) / 160±70(gf)

Release Force 40 gf min / 30 gf min




Contact Resistance 200mΩ

Endurance 100,000 cycles


rating 15VDC 20mA



CIRCUIT
DIAGRAM

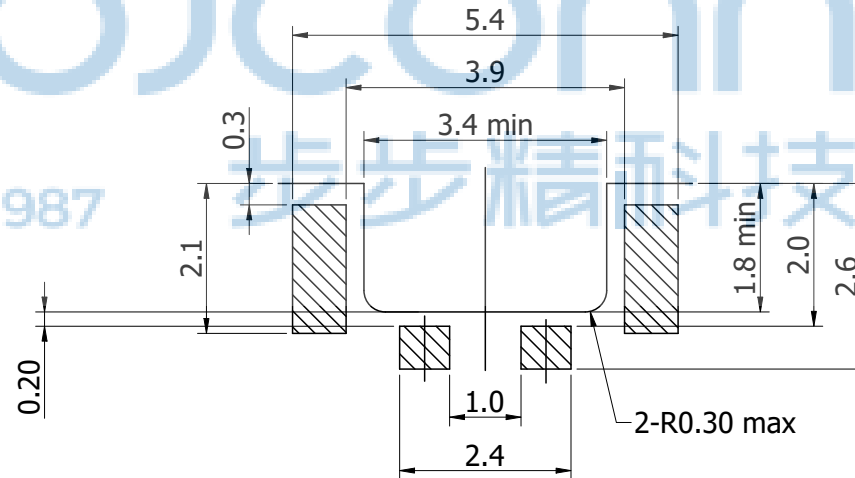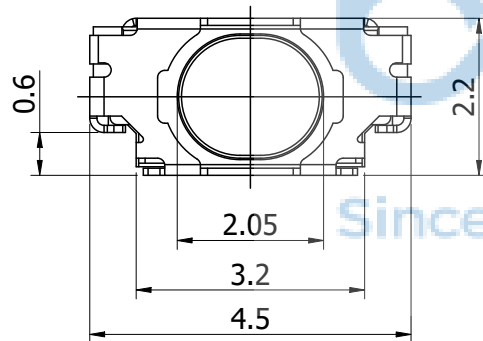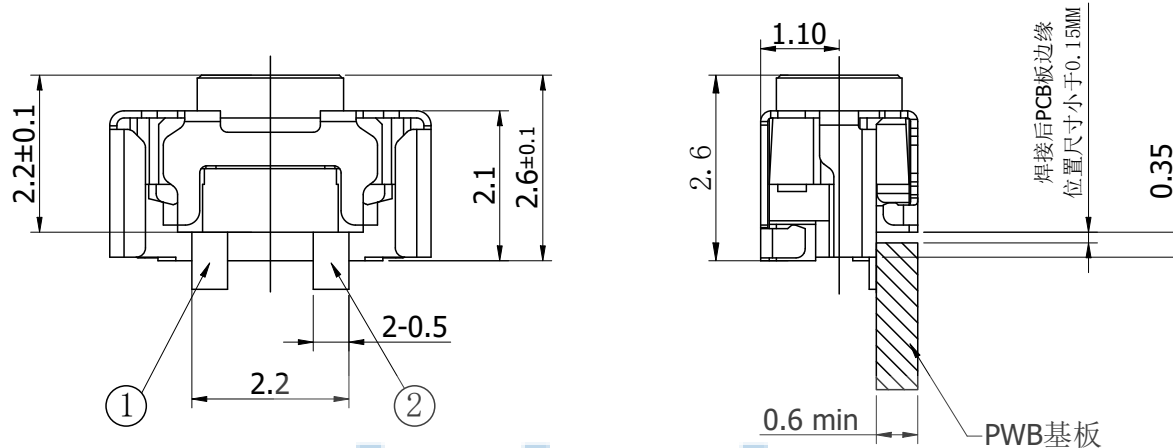

P.C.B LAND
DIMENSION

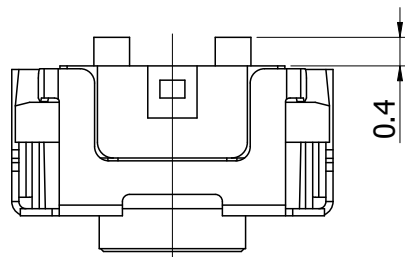

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: 轻触开关 2.2x4.5x2.6 侧按 两脚贴
沉板0.6 不锈钢弹片 160GF 编带

APPD. JM_Zheng





PJ. NO.: 901-432-043001-Y5G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

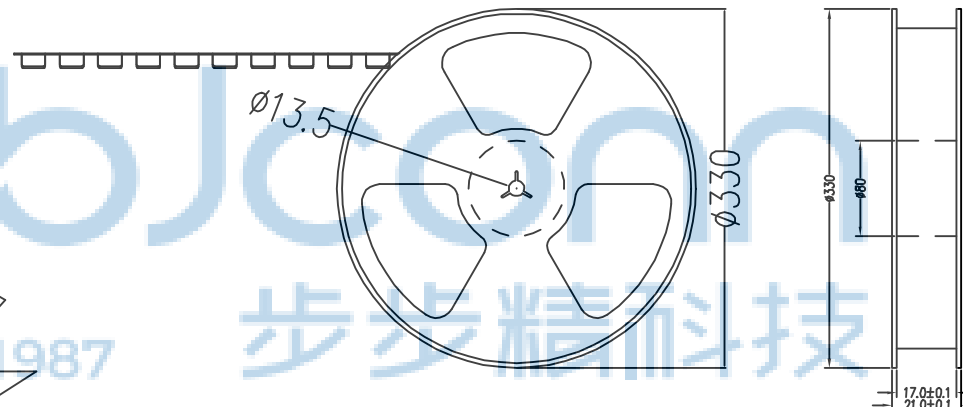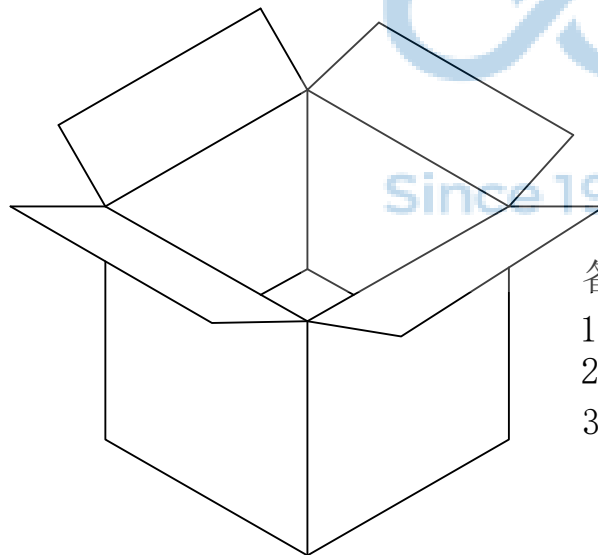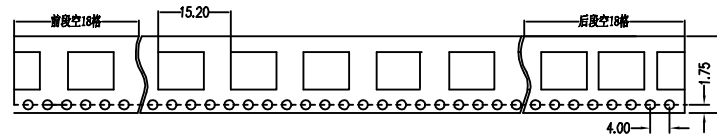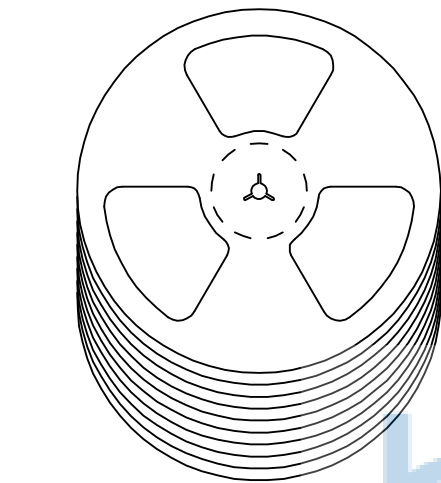

备注:

1. 包装数量: 3000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 轻触开关 2.2x4.5x2.6 侧按 两脚贴 沉板0.6 不锈钢弹片 160GF 编带	
.X': ±3' .X'': ±2' .X': ±1'		P.J. NO.: 901-432-043001-Y5G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
PDWG.NO: 0278-1		MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A	
		REV.: A0	
		UNIT: mm	
		PAGE: 2/2	