

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

1、CHARACTERISTICS

Model

Operating Force 220±70(gf) / 160±70(gf)

Release Force 40 gf min / 30 gf min




Contact Resistance 200mΩ

Endurance 600,000 cycles

rating 15VDC 20mA



CIRCUIT
DIAGRAM

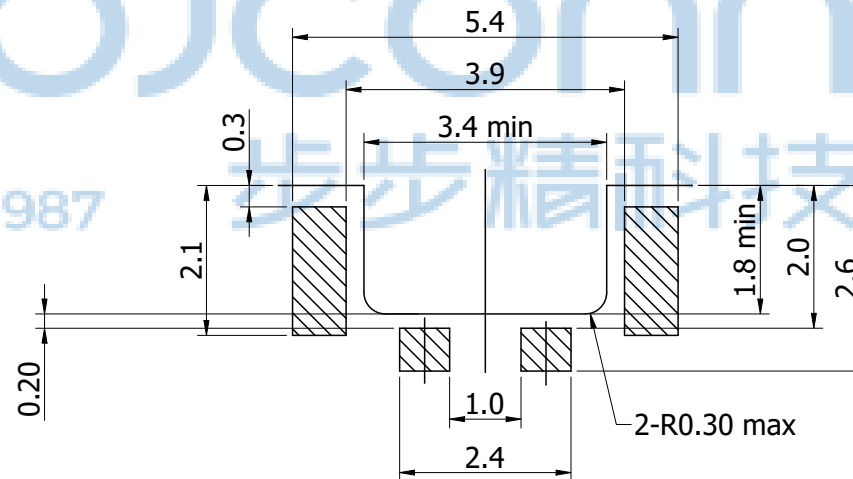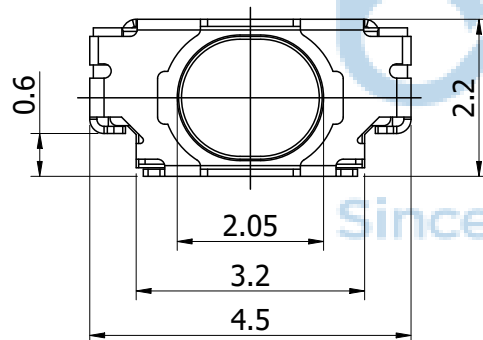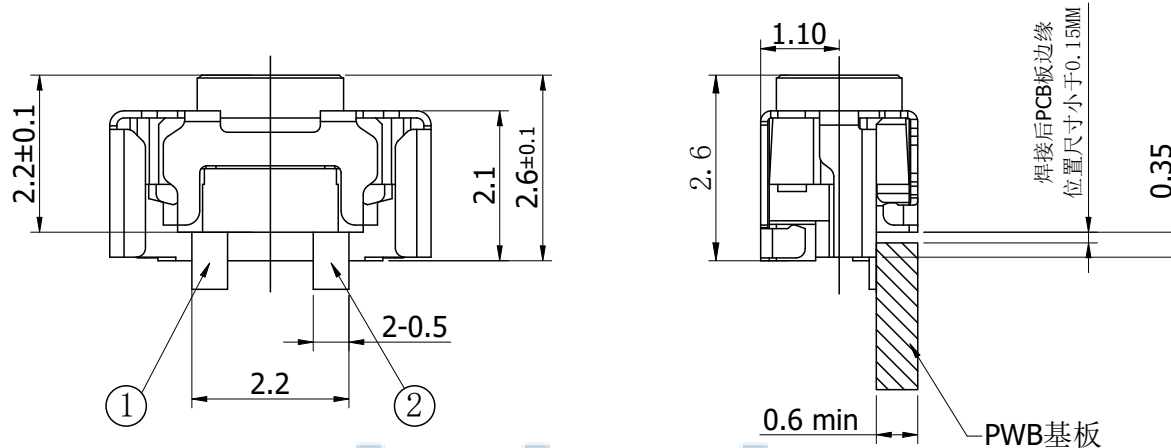

P.C.B LAND
DIMENSION



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0278-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: 轻触开关 2.2x4.5x2.6 侧按 两脚贴
沉板0.6 不锈钢弹片 160GF 60万次 编带

APPD. JM_Zheng

PJ. NO.: 901-432-043002-Y5G





CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

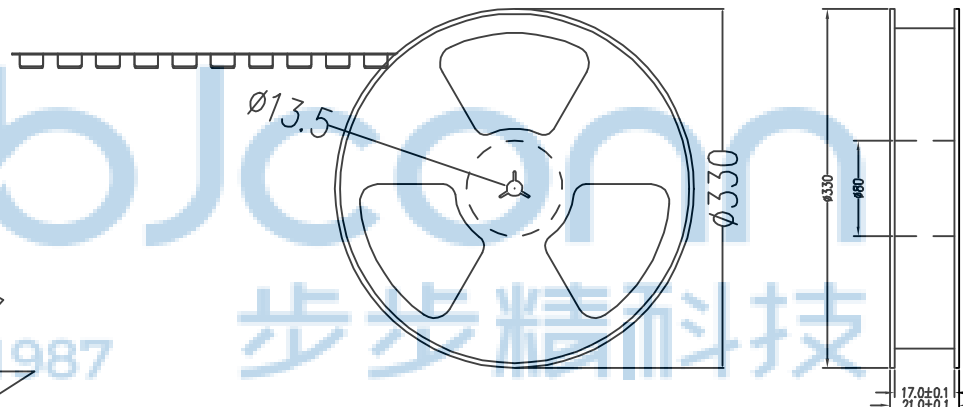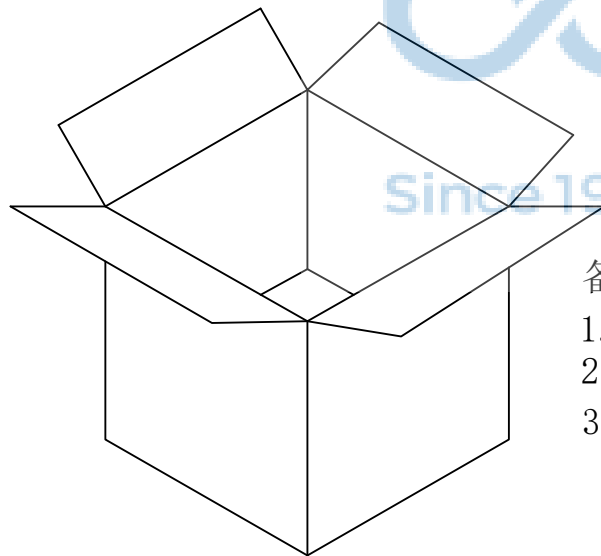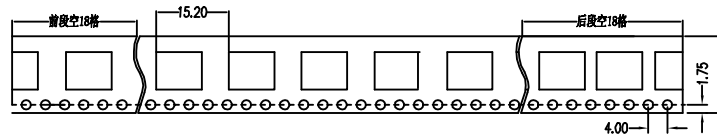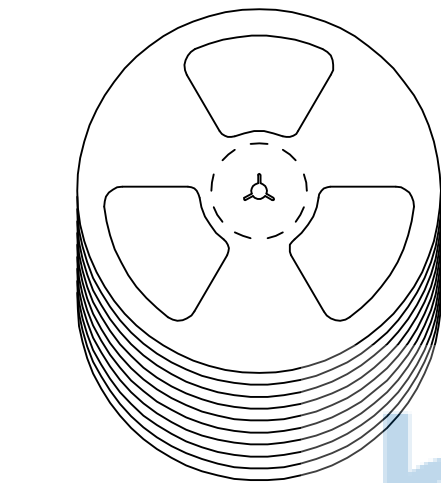

备注:

1. 包装数量: 3000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0278-1

 深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME: 轻触开关 2.2x4.5x2.6 侧按 两脚贴
沉板0.6 不锈钢弹片 160GF 60万次 编带

APPD. JM_Zheng

PJ. NO.: 901-432-043002-Y5G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2