


技术要求

- 额定电压 :12V (DC)
额定电流 :0.5A
- 开关耐压: AC100V 1分钟, 不发生击穿和闪络现象。
- 开关绝缘电阻: $\geq 50M\Omega$ 。
- 开关接触电阻: $\leq 100m\Omega$ 。
- 开关动作力 : $25g\pm 10g$
- 开关的电气寿命要求 ≥ 50000 次循环。
- 未注尺寸公差按GB/T1804-m级精度要求。




安装尺寸



电路图

⑥	滑块		PA9T	黑色	
⑤	接触脚	6	黄铜 t=0.20mm	镀银	
④	盖子	1	黄铜 t=0.20mm	镀银	
③	簧片	1	磷铜 t=0.10mm	镀银	
②	摆柄	1	PA9T	黑色	
①	基座	1	PA9T	黑色	
序号	零件名称	数量	材质、规格	颜色\镀层	备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0014-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: 检测开关 KFC-V-17T	
	APPD.	JM_Zheng			PJ. NO.: 103-011-000001-V9G		
	CHKD.	LYX			SIZE: A4	DRW NO.:	
			FINISH: SEE NOTES		MAT'L.: SEE NOTES		
			SCALE: N/A		REV.: A0	UNIT: mm	PAGE: 1/2
	DR.	LYL					

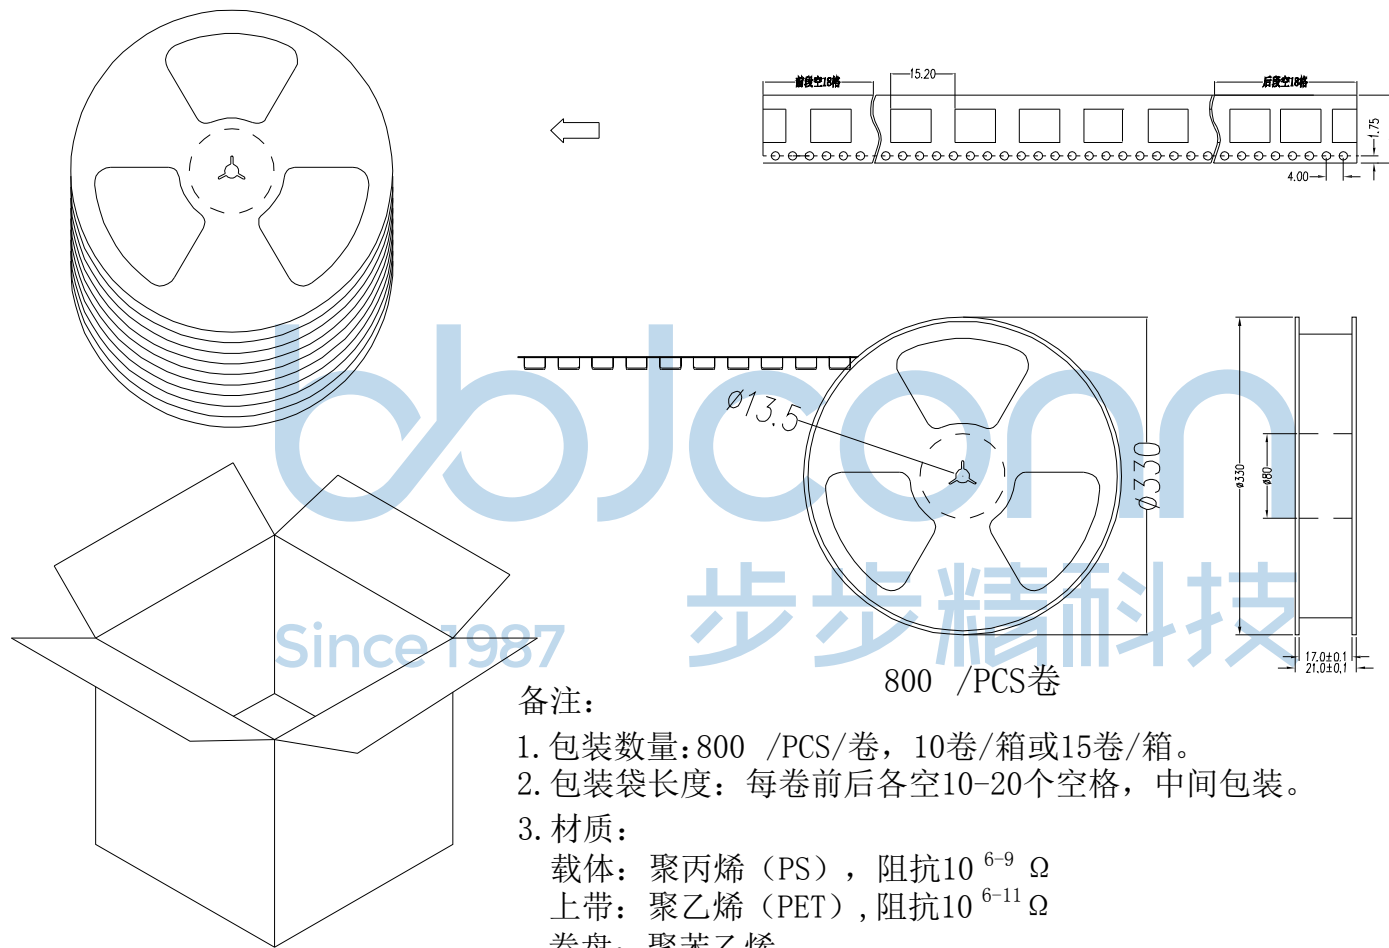

备注:

1. 包装数量: 800 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: 检测开关 KFC-V-17T	
.X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		APPD. JM_Zheng		PJ. NO.: 103-011-000001-V9G	
CHKD. LYX		DR. LYL		SIZE: A4 DRW NO.:	
PDWG.NO: 0014-1		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 2/2	