



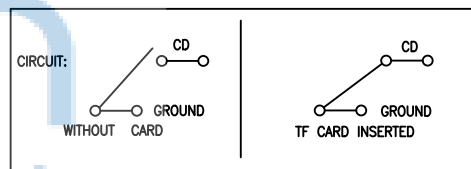


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

规格说明:
1. 尺寸测量:
1-1. “▲”为重点检验尺寸;
2:电气特性:
2-1.额定接触电流: 0.5A Max;
2-2.接触电阻: 100 mΩ Max;
2-3.绝缘电阻: 1000MΩ MIN. 500V DC 测试时长1分钟。
3. 机械特性:
3-1.锁退卡耐久: 5000 cycles;
3-2.锁卡力: 0.10Kgf~1.50Kgf;
3-3.退卡力: 0.10Kgf~1.50Kgf;
4. 环境特性:
4-1.测试温度范围: -25 ℃ to +85 ℃;
4-2.盐雾测试: 5% 浓度盐水 端子镀锡区域喷雾8H、刷金区域喷雾24H、外壳盐雾24H。

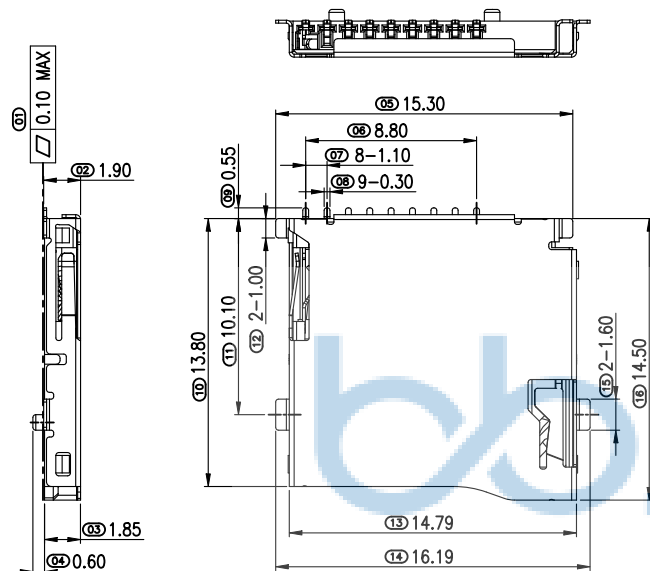

NO.	ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
9#	CD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

6	外壳	SUS304 H, T=0.15±0.01mm 全区镀镍底30u~平脚	1Pcs
5	拉杆	SUS304~去磁	1Pcs
4	滑块	LCP~黑色	1Pcs
3	弹簧	SWP-B	1Pcs
2	端子	C5191 T=0.15mm 电镀镍30u 镀雾锡80u 接触区镀金0.5u	1Pcs
1	主体	LCP~黑色	1Pcs
No.	品名	规格	数量

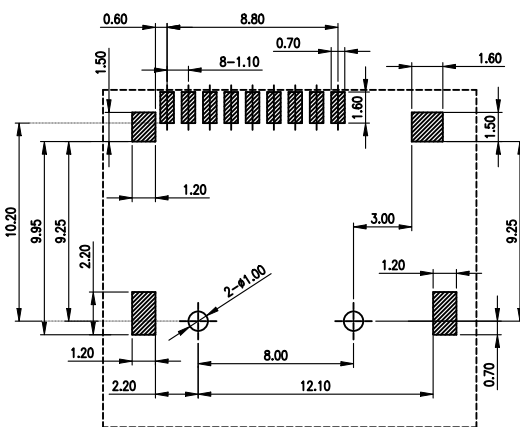

(RECOMMENDED/P.C.B)HOLE LAYOUT
COMPONENT SIDE VIEW TOLERANCE:±0.05

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0023-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:TF 卡座 外焊 9P H=1.90 端子SMT 带柱
不锈钢外壳 平脚镀镍 LCP黑胶 编带

APPD. JM_Zheng

PJ. NO.: 142-123-090001-J8G


CHKD. LYX

SIZE: A4 DRW NO.:

DR. GZY


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

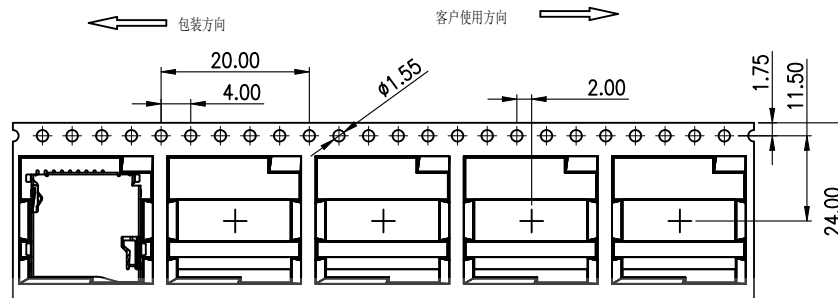

NOTES

1. 每卷包装数量:1000PCS/每卷
2. 卷带包装方式:




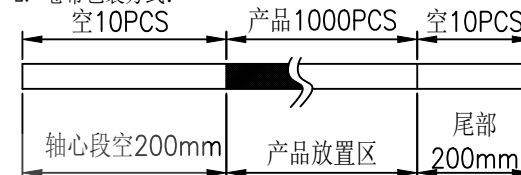


- 3.每箱包装数量:10000PCS/箱

4. 重量 :

4.1 净重 : Kg

4.2 毛重 : Kg

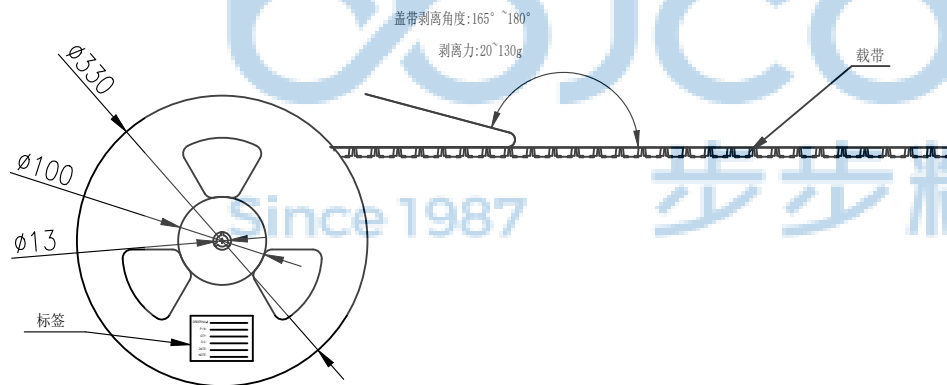

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME:TF 卡座 外焊 9P H=1.90 端子SMT 带柱 不锈钢外壳 平脚镀镍 LCP黑胶 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 142-123-090001-J8G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG,NO: 0023-1		DR. GZY		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	