



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				


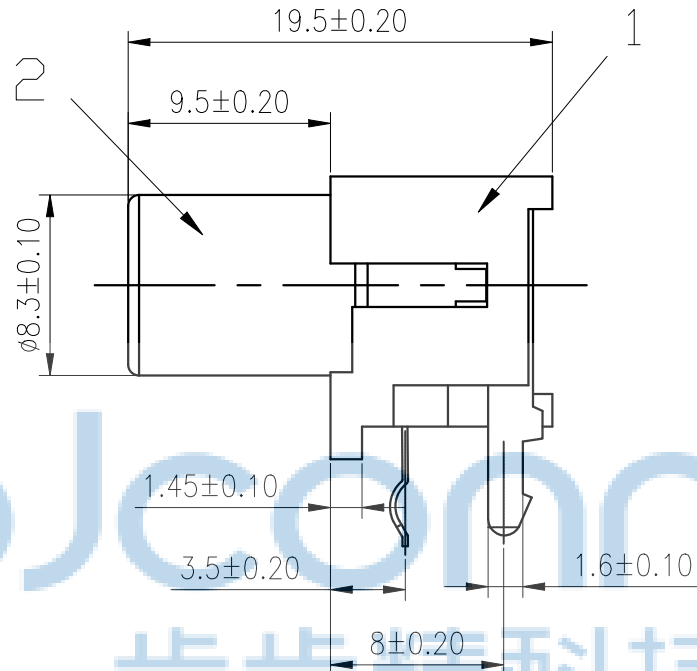


主要技术特性要求:

1. 使用条件:
环境温度: -40~70°
2. 额定负荷: DC50V 0.2A
3. 接触电阻: ≤0.03Ω
4. 绝缘电阻: ≥100MΩ DC500V
5. 耐压: AC500V (50Hz) /1min
6. 插拔力: 3-25N
7. 寿命: 5000次

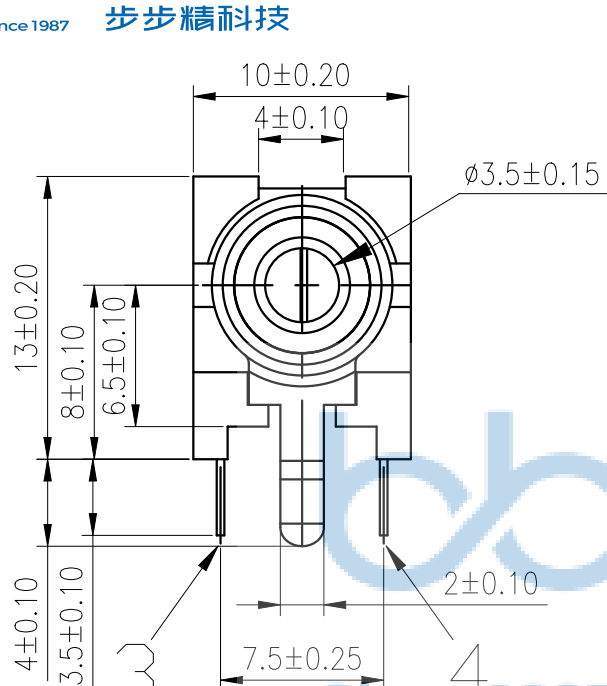

基座颜色	绿	
	红	
	白	
	黄	
	黑	
	橙	√

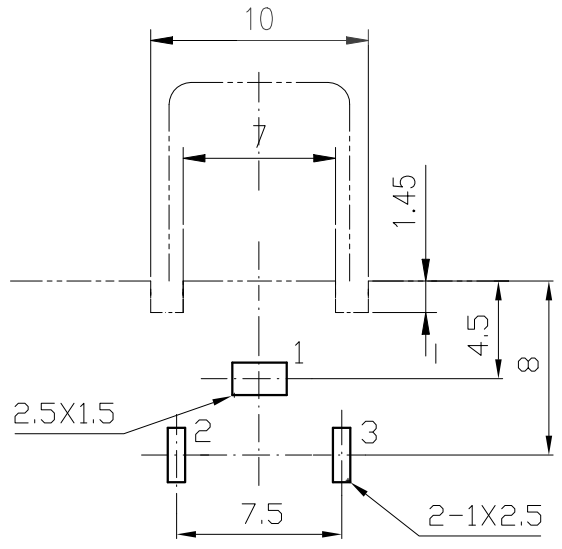

CIRCUIT DIAGRAM



4	静片	2	黄铜T=0.3	1	镀铜锡	
3	动片	3	磷铜T=0.3	1	镀铜锡	
2	铜套	1	黄铜T=0.3	1	镀可焊镍	
1	基座		PBT	1		
序号	名称	材料	数量	镀层/颜色	备注	

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG,NO: 0334-1

深圳市步步精科技有限公司

NAME: AV插座 8.4-05K 单孔 三脚插 不带屏蔽 PBT紫色耐高温料基座

PJ. NO.: AV.01.63-11-4001

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

APPD. JM_Zheng


CHKD. LYX

DR. TSP

PE袋规格: 260*185

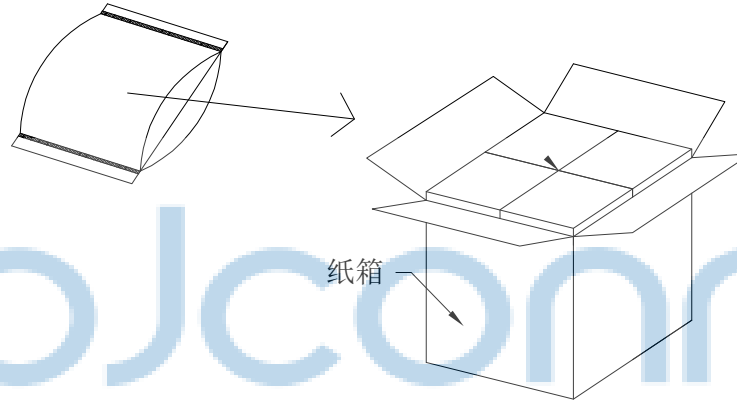

成品标签



1. 包装要求:
- 1.1 每个PE袋包装400pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计8000pcs;
 - 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: AV插座 8.4-05K 单孔 三脚插 不带屏蔽 PBT紫色耐高温料基座	
APPD. JM_Zheng		PJ. NO.: AV.01.63-11-4001	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0334-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	