

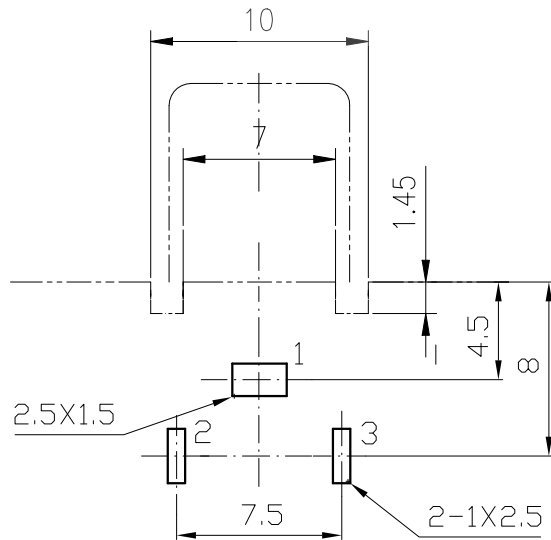
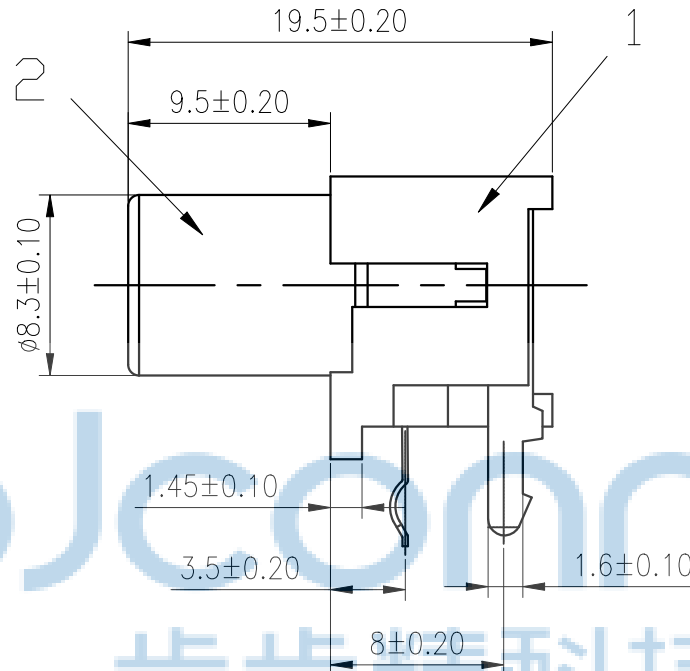


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

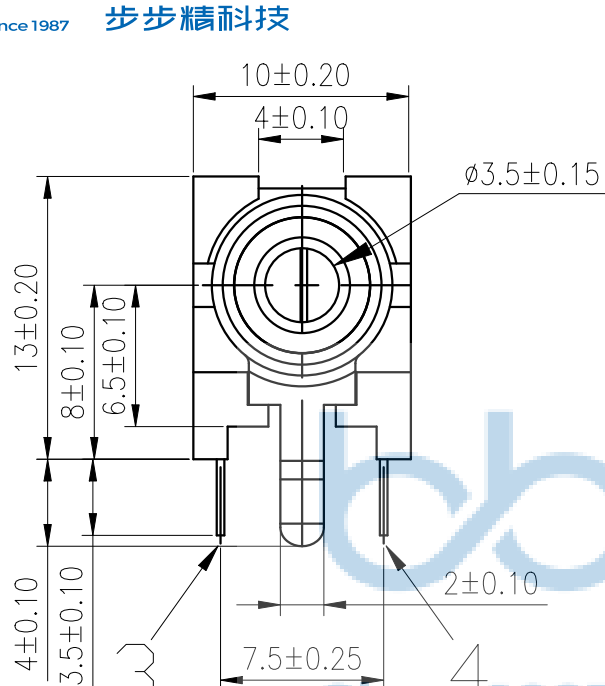

PCB LAYOUT(TOP VIEW)
Tolerance:±0.05



CIRCUIT DIAGRAM

主要技术特性要求:

- 使用条件:
环境温度: $-40\sim 70^{\circ}$
- 额定负荷: DC50V 0.2A
- 接触电阻: $\leq 0.03\Omega$
- 绝缘电阻: $\geq 100M\Omega$ DC500V
- 耐压: AC500V (50Hz) /1min
- 插拔力: 3-25N
- 寿命: 5000次



基座颜色	绿	√
	红	
	白	
	黄	
	黑	
	橙	


4	静片	2	黄铜T=0.3	1	镀铜锡	
3	动片	3	磷铜T=0.3	1	镀铜锡	
2	铜套	1	黄铜T=0.3	1	镀铜锡	
1	基座		PBT	1		
序号	名 称		材 料	数量	镀层/颜色	备 注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0334-1


深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$
NAME: AV插座 8.4-05K 单孔 三脚插 不带屏蔽 PBT绿色耐高温料基座	
APPD. JM_Zheng	PJ. NO.: AV.01.93-11-4001
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

PE袋规格: 260*185

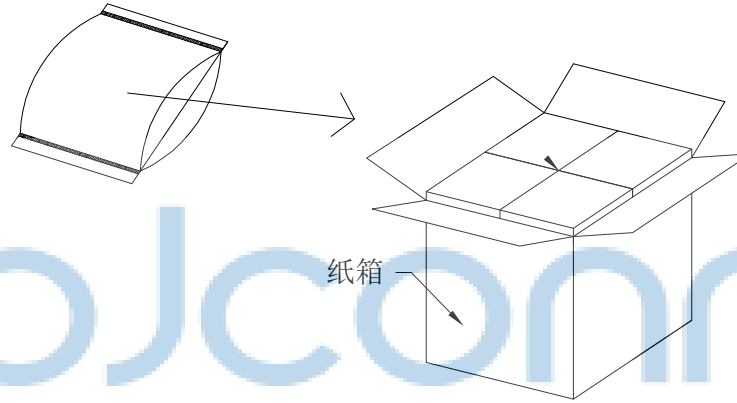

成品标签



1. 包装要求:
- 1.1 每个PE袋包装400pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计8000pcs;
 - 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0334-1		NAME: AV插座 8.4-05K 单孔 三脚插 不带屏蔽 PBT绿色耐高温料基座	
APPD.	JM_Zheng	PJ. NO.: AV.01.93-11-4001	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2