


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				


主要技术特性要求:

- 使用条件:
环境温度: -25~70℃
相对湿度: 90% (40℃)
- 额定负荷: DC30V 0.3A
- 接触电阻: $\leq 0.03\Omega$
- 绝缘电阻: $\geq 100M\Omega$
- 耐压: AC250V (50Hz) 1min
- 插拔力: 5~35N
- 寿命: 1000次

颜色示意图



接点示意图





P. C. B LAYOUT (TOP VIEW)

Tolerance: ± 0.05

7	色标圈	PBT	2		
6	屏蔽面板	不锈钢 T=0.15mm	1	镀铜锡	
5	短触片	黄铜 T=0.3mm	1	镀铜锡	
4	长触片	黄铜 T=0.3mm	1	镀铜锡	
3	眼镜圈	PBT	1	黑色	
2	基座	PBT	1	黑色	
1	铜套	黄铜 T=0.25mm	2	镀铜锡	
序号	名称	材料	数量	镀层/颜色	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0334-1

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: ± 3 .X*: ± 2 .XX*: ± 1		NAME: AV插座 AV2-8.4-13D 两孔 三脚插 红白色圈 PBT黑胶耐高温料基座	
APPD.	JM_Zheng	PJ. NO.: AV.02.18-22-4001			
CHKD.	TSP	SIZE: A4 DRW NO.:			
DR.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A3 UNIT: mm PAGE: 1/2	

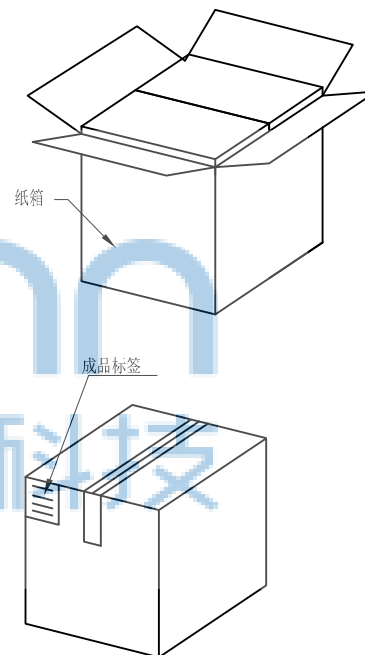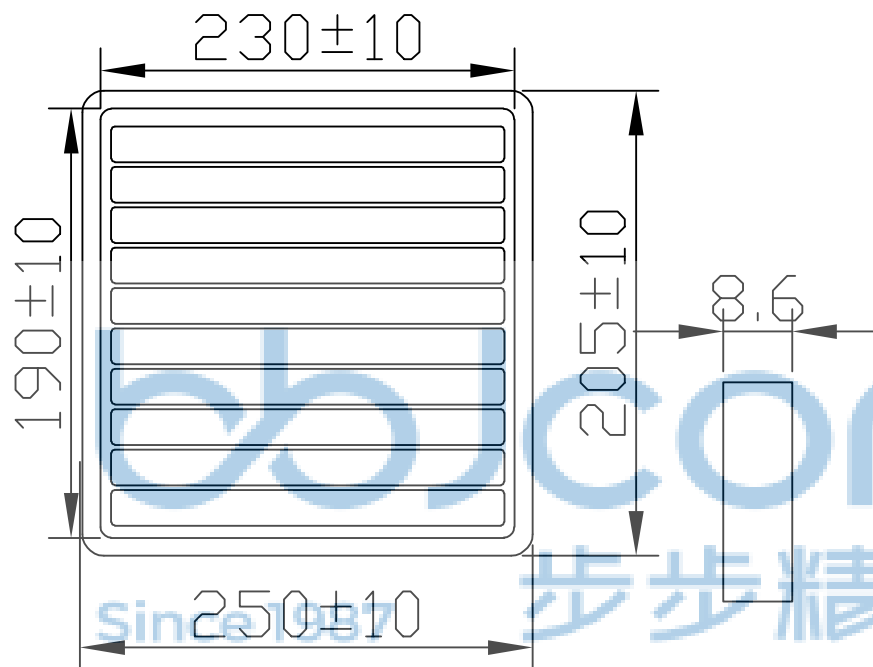

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每50盘放一箱, 共计5000PCS;
 - 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: AV插座 AV2-8.4-13D 两孔 三脚插 红白色圈 PBT黑胶耐高温料基座	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3' .X*: ±2' .XX*: ±1'		PJ. NO.: AV.02.18-22-4001	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0334-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	