
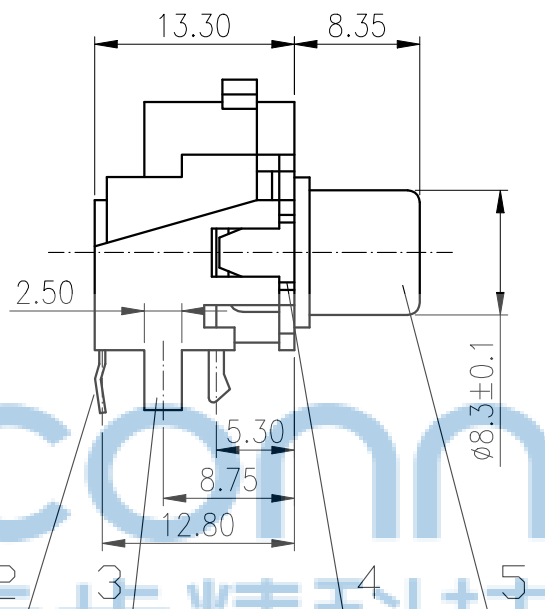




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

主要技术特性要求:

1. 使用条件:
环境温度: $-40\sim 70^{\circ}$
2. 额定负荷: DC50V 0.2A
3. 接触电阻: $\leq 0.03\Omega$
4. 绝缘电阻: $\geq 100M\Omega$ DC500V
5. 耐压: AC250V (50Hz) /1min
6. 插拔力: 3~25N
7. 寿命: 500次

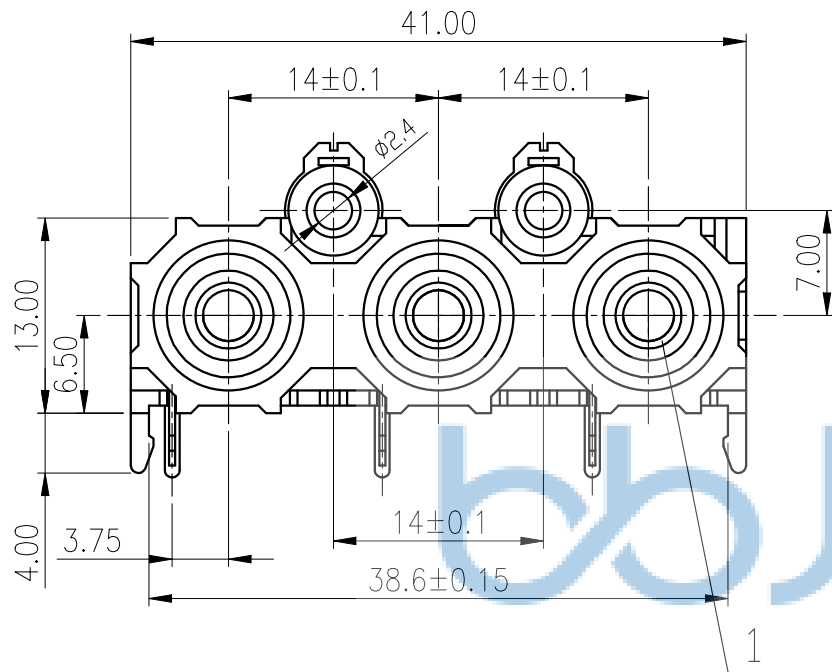

接点示意图

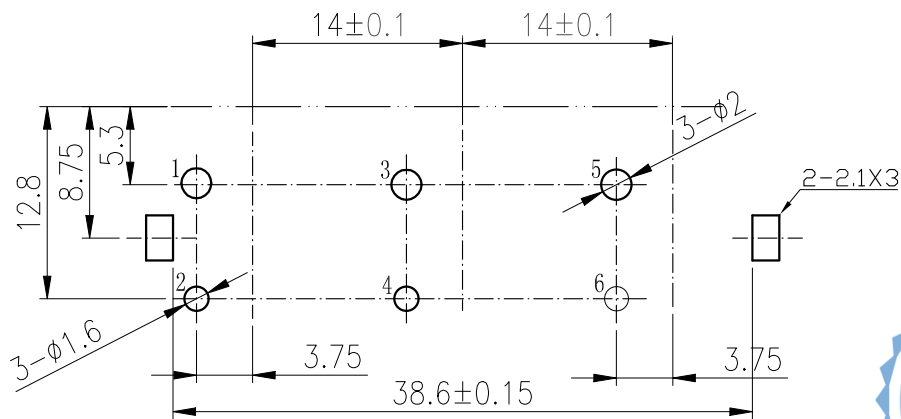

颜色示意图



5	铜套	黄铜T=0.3	3	镀铜锡	
4	眼镜圈	ABS	1	黑色	
3	基座	PBT	1	黄色	
2	触片	黄铜T=0.3	3	镀铜锡	
1	色垫圈	PBT	3		
序号	名 称	材 料	数量	镀层/颜色	备 注



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG:NO: 0334-1

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME: AV插座 AV3-8.4-14 三孔 六脚插 不带屏蔽
橙红白色圈 PBT黄色耐高温料基座

APPD. JM Zheng

	PJ. NO.: AV.03.39-11-4001
---	---------------------------

CHICK	100
-------	-----

	SIZE: A4		DRW NO.:


CHKD.	LYX

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


DR.	TSP
-----	-----

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

PE袋规格: 260*185

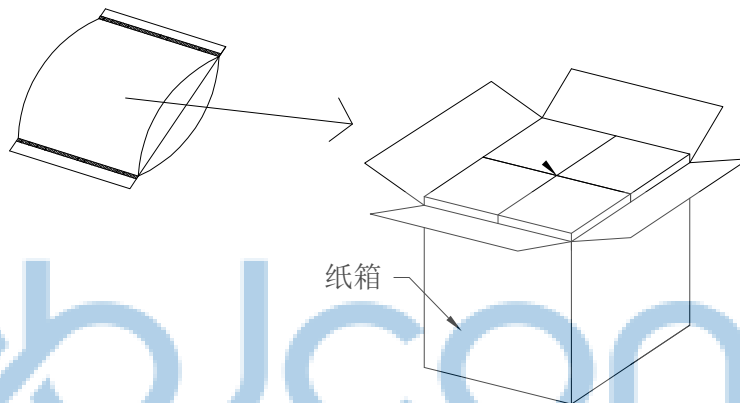

成品标签



1. 包装要求:
- 1.1 每个PE袋包装100pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每36个小纸盒放一个纸箱, 共计3600pcs;
 - 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0334-1		NAME: AV插座 AV3-8.4-14 三孔 六脚插 不带屏蔽 橙红白色圈 PBT黄色耐高温料基座	
APPD.	JM_Zheng	PJ. NO.: AV.03.39-11-4001	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2