
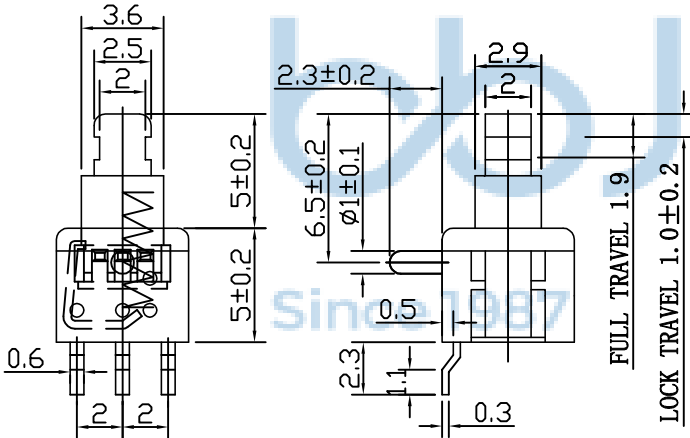







SCHEMATIC



P. C. B LAYOUT

ELECTRICAL CHARACTERISTICS

1. RATING: DC 12V 0.05A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 30,000 cycles
4. SOLDERING, SWITCH IS UNLOCK
焊接时, 开关处于解锁状态



NO.	PART NAME	MATERIAL	QTY.	FINISHING
8				
7	TERMINAL	BRASS STRIP	3	Ag PLATED
6	CASE	PPA	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	PBS	1	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0005-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng
CHKD LYX

DR SGF



NAME: 按键开关 5.8x5.8 三脚侧贴
带柱 自锁 编带

PJ NO: 904-010-040001-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV: A0 UNIT:mm PAGE: 1/2

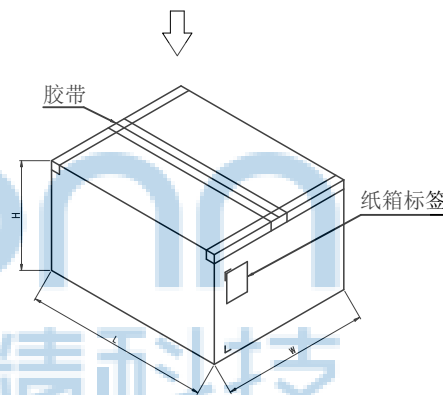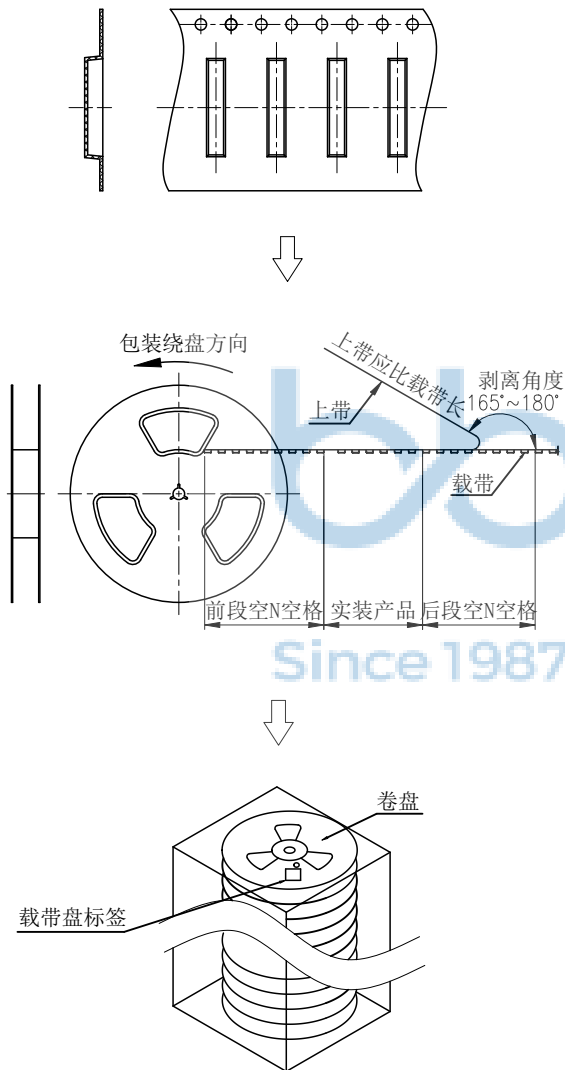

纸箱规格: W345*L345*H230MM



备注:

- 1、包装数量: 600/PCS/卷, 5卷/箱.
- 2、包装袋长度: 每卷前后各空10~20个空格, 中间包装.
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0005-1

深圳市步步精科技有限公司		NAME: 按键开关 5.8x5.8 三脚侧贴 带柱 自锁 编带	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ X'X': $\pm 1'$	PJ NO: 904-010-040001-J8G	
APPD JM_Zheng	CHKD LYX	SIZE:A4	DRW NO:
DR SGF		FINISH:SEE NOTES	MAT'L:SEE NOTES
		SCALE:N/A	REV: A0 UNIT:mm PAGE: 2/2