

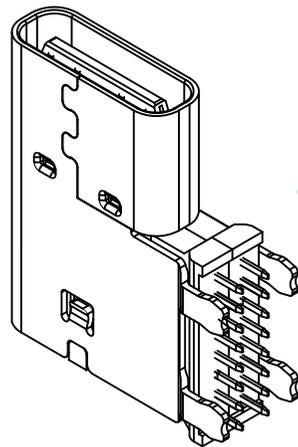
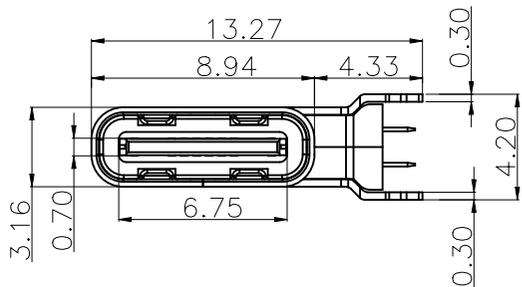
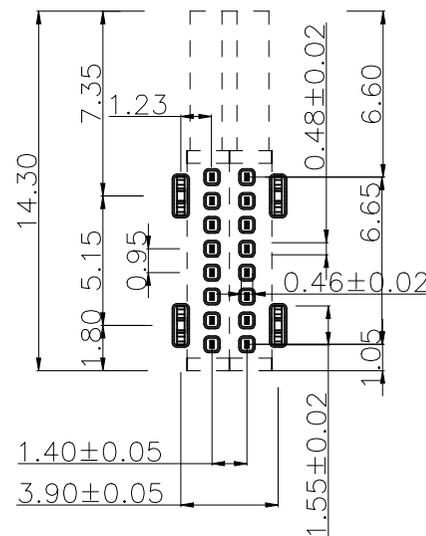
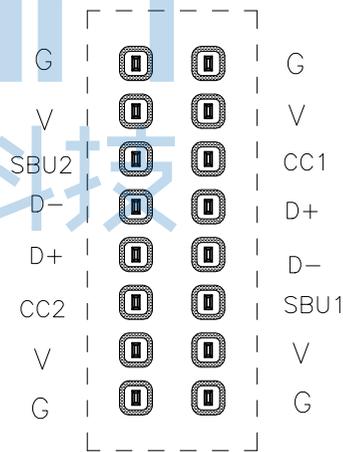
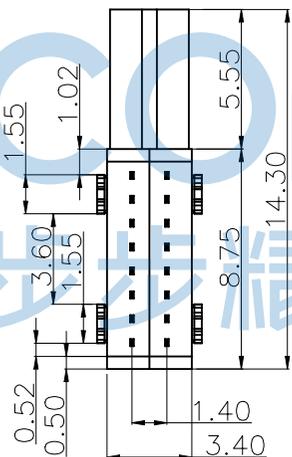


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

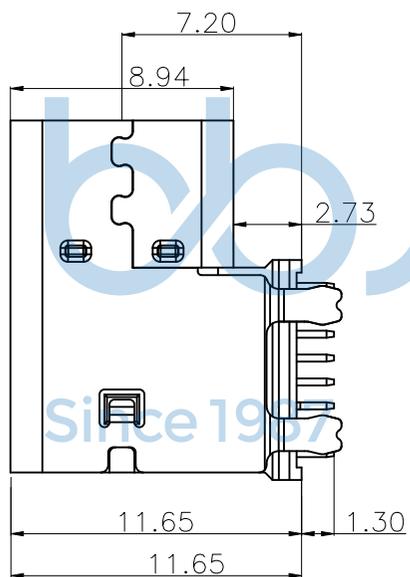


TYPE-C USB技术要求:

- 电气性能
 - 1.1 额定电流 3A
 - 1.2 额定电压: 5V.
 - 1.3 耐压: 500 V(AC) for 1 min.
 - 1.4 接触阻抗: 40mΩ Max.
可靠性测试后阻抗变化不得超过10mΩ.
 - 1.5 绝缘阻抗: 100 MΩ Min.
- 机械性能
 - 2.1 插入力: 5-20N. 拔出力: 6-20N.
 - 2.2 寿命测试 5000 Max.
 - 2.3 推力: 50N min.
 - 2.4 剥离强度: 150N min.
 - 2.5 扭曲强度: 0.75Nm
- 材料要求
 - 4.1 胶芯材料: LCP
 - 4.2 外壳材料: SPCC
 - 4.3 端子材料: C5191
 - 4.3 卡钩材料: SUS201
- 盐雾要求: 24H
- 工作温度: -20° C~85° C

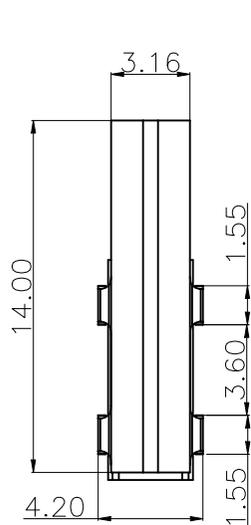

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

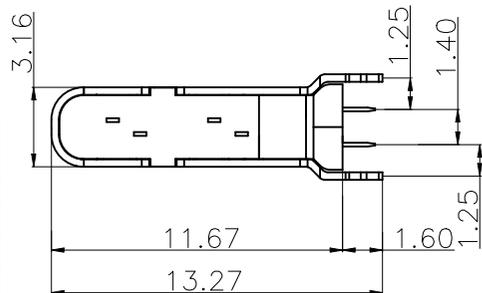


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
PDWG.NO: 0366-2

深圳市步步精科技有限公司

NAME: TYPE-C 16P 母座 侧插 四脚插 端子DIP 垫高2.73 L=14.0 CH=7.20 吸塑盒装

PJ. NO.: 126-228-160001-N5G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

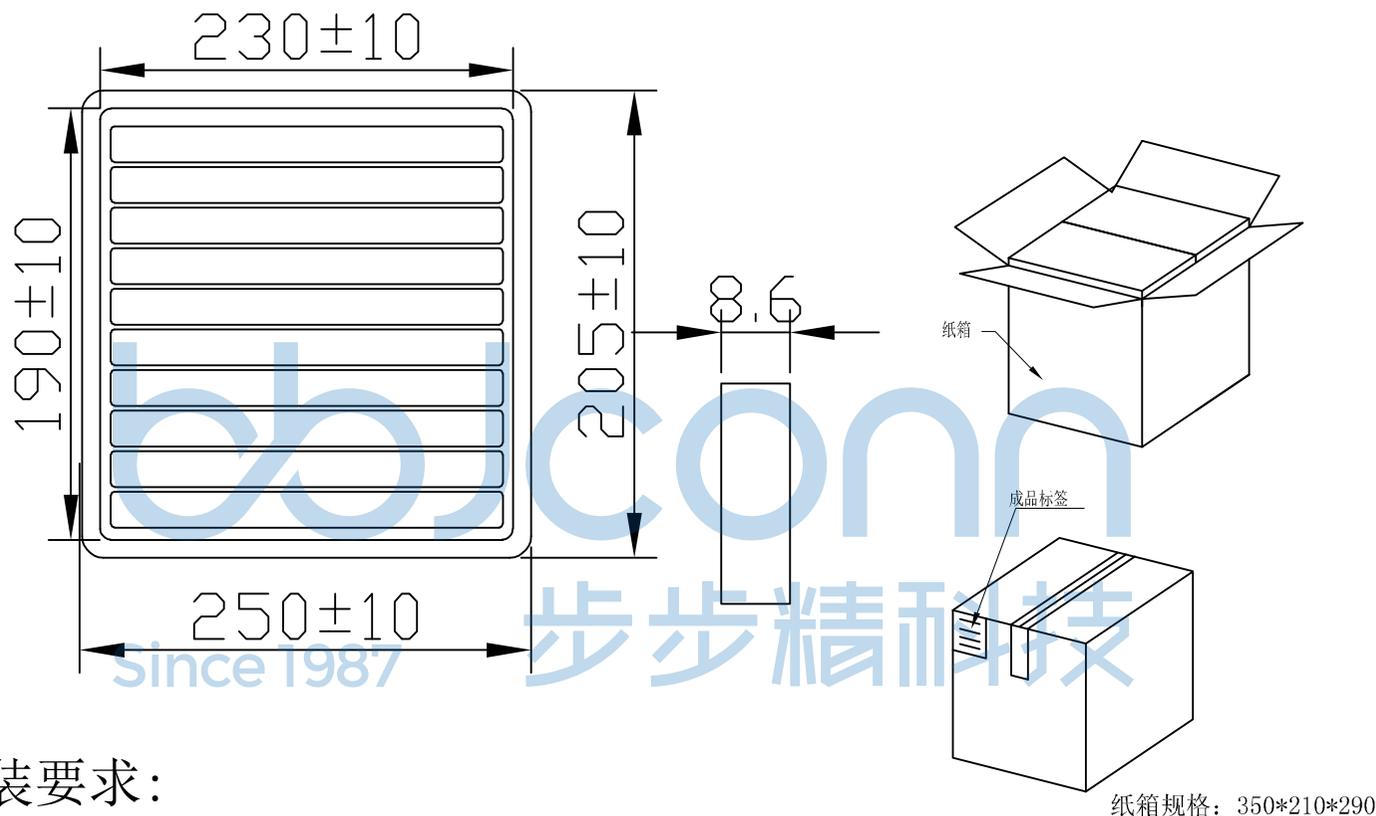

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每箱, 共计10000PCS;
 - 1.3 纸箱外贴上标签。

纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .XX': ±1'		NAME: TYPE-C 16P 母座 侧插 四脚插 端子DIP 垫高2.73 L=14.0 CH=7.20 吸塑盒装	
APPD.	JM_Zheng	PJ. NO.: 126-228-160001-N5G SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2/2
PDWG.NO:	0366-2	DR.	TSP		