



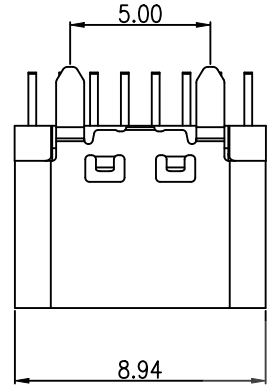
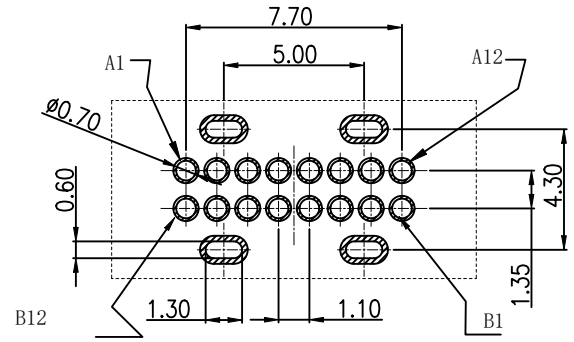



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

- NOTES:
1. CURRENT RATING: 5.0A MAX.
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC.
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C.
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX.
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N.
 7. UNMATING FORCE: 8N~20N.
 8. DURABILITY:10,000 CYCLES.

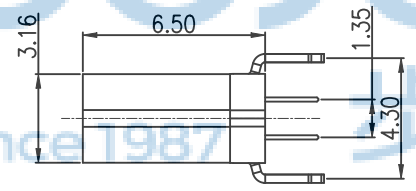

SECTION A-A
SCALE 1:1

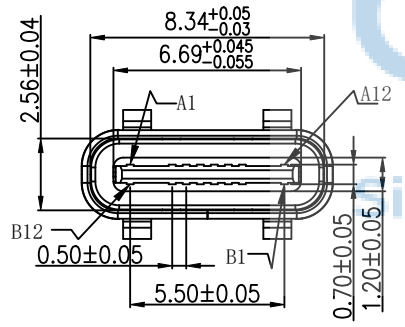

Recommended P.C.B. Layout
Unspecified tolerance: ±0.05
(Top view)



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MATERIALS		FINISH
内壳	SUS304R-1/2H.T=0.30mm	Ni:50u"Min;
中夹片	SUS301R-H.T=0.15mm	Ni:50u"Min;
MD半叠料	C7025 TM03. T=0.15mm 端子	Ni:30u"Min; CONTACT AREA: Au 1u", SOLDE AREA: G/F.
成品	C7025 TM03. T=0.15mm 端子	
塑料料	LCP(G.F30%) BLACK.	/

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0366-2

深圳市步步精科技有限公司

NAME: TYPE-C 16P 母座 直立式 四脚插 带中夹片 端子DIP H=6.50 LCP黑胶 过大电流5A 编带

APPD: JM_Zheng

CHKD: LYX

DR: SGF


PJ. NO.: 126-225-160010-N5G

SIZE: A4 DRW NO.:




FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

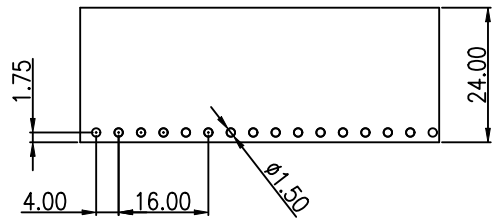

SCALE 1:5

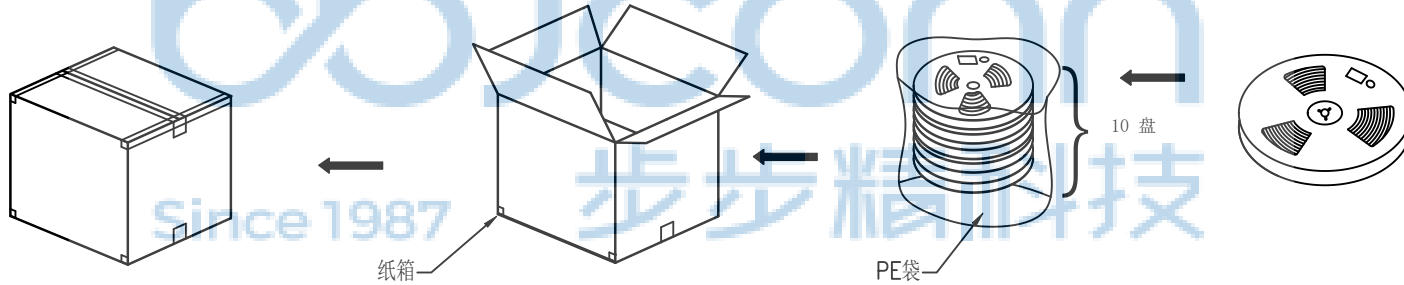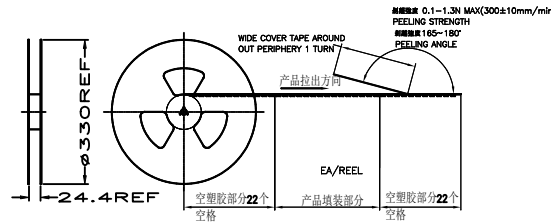

说明:

- 1, 将检查合格的产品, 放入承载带中;
- 2, 将11盘承载带放入纸箱中;
- 3, 将纸箱封装好, 贴上标签.

每箱数量	净重(Kg)	毛重 (Kg)
	xxx	xxx



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
NAME:	TYPE-C 16P 母座 直立式 四脚插 带中夹片 端子DIP H=6.50 LCP黑胶 过大电流5A 编带		
APPD.	JM_Zheng	PJ. NO.: 126-225-160010-N5G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0366-2	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	2/2